

# <SPECIFICATION>

SPEC.No. ASDIQ-SPE-040(00)

Date: Jan. 7, 2022

To :

CUSTOMER'S PRODUCT NAME

ASDI PRODUCT NAME:

AMPI4018B-SERIES

## RECEIPT CONFIRMATION

UNCONDITIONAL CONSENT

CONDITIONAL CONSENT

APPROVED	CHECKED

## ASDI SIGNATURE

APPROVED	CHECKED	PREPARED
Xianglong Li	Liang Wang	Jiayin Cai



Xiamen ASDI Electronics Co.,Ltd.



# CAUTION WHEN HANDLING

Before use the products, please read this specification.

# CAUTION FOR SAFETY USING

When use the products, be careful to mentioned below for safety using.

## CAUTION

\*The product should be used within 12 monthes.

Focus on the storage conditions.

Solderability may become weak if it exceeds the period.

\*Do not use and store the product in condition of gas corrosion  
(Salt,Acid,Alkaline).

\*The products must be preheated before soldering.

The operating temperature including self-generated heat must be within '- 25 ~ +125°C.

\*Rework by soldering iron;Please keep the mentioned conditions in this specification.

\*In case of insert P.C. Board on chassis, do not add mechanical stress to the product.

\*Be careful to arrange of non-magnetic field type inductors.

The error may be caused by magnetic field coupling.

\*In case handle the products, please use wrist strap for ground static discharge on human body.

The product keeps away from magnet or magnetized things.

\*Do not use the product beyond the mentioned conditions in this specification.

\*About an application

The products listed on this specification sheet are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

\*The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet.

1)Aerospace/Aviation equipment

6)Transportation control equipment

2)Military equipment

7)Power-generation control equipment

3)Seabed equipment

which directly endanger human life

4)Safety equipment

8)Atomic energy-related equipment

5)Medical equipment

9)Other applications that are not  
considered general-purpose applications

If you intend to use the products in the following applications, please contact our sales office.

Transportation equipment (cars, electric trains, ships, etc.), Public information-processing equipment,

Electric heating apparatus / burning equipment, Disaster prevention/crime prevention equipment

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.

Xiamen ASDI Electronics Co.,Ltd.

DWG.No.  
ASDIQ-SPE-040(00)

ISSUE

CUSTOMER

ASDI PART No.  
AMPI4018B-Series

CUSTOMER'S DWG NO.

## 1.INDEX

Listed item	Attachment&Tables	Page
1.Features	Please see (1)	3/8
2.Dimensions	Please see (2)	3/8
3.Part Numbering	Please see (3)	3/8
4.Electrical Specifications	Please see (4)	3/8
5.Material List	Please see (5)	5/8
6.Reliability Tests	Please see (6)	5/8
7.Soldering	Please see (7)	7/8
8.Packaging Information	Please see (8)	7/8
9.Note	Please see (9)	8/8

## 2.Manufacturing Location

China

DWG.No.

ASDIQ-SPE-040(00)

PAGE  
2/8


Xiamen ASDI Electronics Co.,Ltd.

(1)Features

1. This specification applies Low Profile Power Inductors.
2. 100% Lead(Pb) & Halogen-Free and RoHS compliant.



(2)Dimensions

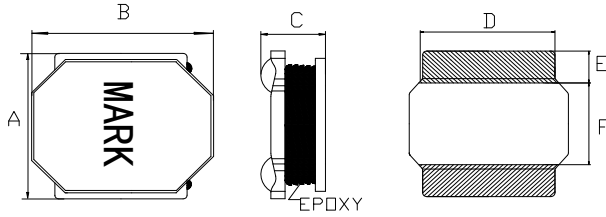

Units: mm

Series	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
AMPI4018B	4.0±0.2	4.0±0.2	1.8 MAX	3.4REF	1.4REF	1.8REF

(3)Part Numbering

**AMPI**      **4018**      **B**      -      **2R2**      **M**  
 A              B              C                              D              E

- A: Series
- B: Dimension
- C: Control S/N
- D: Inductance
- E: Inductance Tolerance

2R2=2.2μH  
 M=±20%;N:±30%

(4)Electrical Specifications

Table 1

ASDI Part Number	Inductance (μH)	Test Frequency	DCR (mΩ)MAX	DCR (mΩ)TYP	Isat(A) ΔL/L0 ≤ 30%	Irms(A) ΔT ≤ 40°C	MARKING
AMPI4018B-R56N	0.56	100kHz/0.25V	24	16	5.00	4.80	R56
AMPI4018B-1R0M	1.00	100kHz/0.25V	32	25	4.50	3.50	1R0
AMPI4018B-1R2M	1.20	100kHz/0.25V	45	35	4.00	3.00	1R2
AMPI4018B-1R5M	1.50	100kHz/0.25V	50	40	3.60	2.80	1R5
AMPI4018B-2R2M	2.20	100kHz/0.25V	58	47	3.00	2.60	2R2
AMPI4018B-3R3M	3.30	100kHz/0.25V	84	70	2.15	2.00	3R3
AMPI4018B-4R7M	4.70	100kHz/0.25V	115	88	2.00	1.80	4R7
AMPI4018B-5R6M	5.60	100kHz/0.25V	125	100	1.70	1.65	5R6
AMPI4018B-6R8M	6.80	100kHz/0.25V	135	110	1.60	1.50	6R8
AMPI4018B-100M	10.0	100kHz/0.25V	220	170	1.40	1.30	100
AMPI4018B-150M	15.0	100kHz/0.25V	325	270	0.95	0.90	150
AMPI4018B-220M	22.0	100kHz/0.25V	450	365	0.80	0.75	220
AMPI4018B-330M	33.0	100kHz/0.25V	680	550	0.75	0.70	330
AMPI4018B-470M	47.0	100kHz/0.25V	845	780	0.65	0.55	470
AMPI4018B-680M	68.0	100kHz/0.25V	1300	1000	0.52	0.50	680
AMPI4018B-101M	100.0	100kHz/0.25V	1900	1500	0.42	0.40	101
AMPI4018B-151M	150.0	100kHz/0.25V	3000	2300	0.36	0.34	151
AMPI4018B-221M	220.0	100kHz/0.25V	4800	4200	0.30	0.25	221

Note:


Isat: Based on inductance change (ΔL/L0: ≤-30%) @ ambient temp. 25°C

Irms: Based on temperature rise (ΔT: 40°C typ.)

DWG.No.	ASDIQ-SPE-040(00)	PAGE 3/8
---------	-------------------	-------------

**Core chipping**


The appearance standard of the chipping size in top side, of bottom side ferrite core is following dimension



Type	L	W
AMPI4018B	1.5mm Max.	1.5mm Max.

**Vacant appearance tolerance Limit**


Size of vacancies occurring to coating resin is specified below.



Wire tolerance limit of coating resin part on product side.  
 Exposed wire occurring to coating resin is specified below.  
 Direction(dimension a): Acceptable when  $a \leq 1/2W$   
 Nonconforming when  $a > 1/2W$   
 Direction(dimension b): Dimension b is not specified.  
 Total area of exposed wire occurring to each sides is  
 more than 50% of coating resin area, that is acceptable.


**External appearance specification for exposed wire**

Exposed end of the winding wire at the secondary side should be 2mm and below.

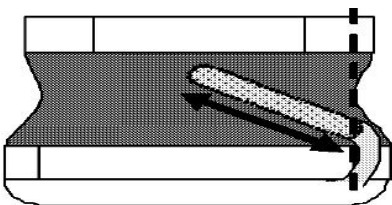

DWG.No.	ASDIQ-SPE-040(00)	PAGE 4/8
---------	-------------------	-------------

(5)Material List



NO	Items	Materials
1	Core	Ni-Zn ferrite
2	Wire	Copper Wire
3	Coating	Epoxy
4	Solder	Lead free


(6)Reliability Tests

No.	Test item	Performance	Test details
1	Operating temperature	- 25 ~ +125℃.	Including self-generated heat
2	Storage Temperature	-40 ~ +85℃. - 5 to 40℃ for the product with taping.	
3	Rated current	Within the specified tolerance	
4	Inductance (L)		LCR Meter: HP 4285A or equivalent, 100kHz, 1V
5	DC Resistance		DC Ohmmeter: HIOKI3227 or equivalent
6	Temperature characteristics	Inductance change: Within±20%	Measurement of inductance shall be taken at temperature rang within-25℃ to +85℃. With reference to inductance value at+20℃,change rate shall be calculated. Measurement of inductance shall be taken at temperature rang within-40℃ to +125℃. With reference to inductance value at+20℃,change rate shall be calculated.
7	Resistance to flexure substrate	No damage	<p>The test samples shall be soldered to the testing board by the reflow. As illustrated below, apply force in the direction of the arrow indicating until deflection of the test board reaches to 2mm.</p> <p>Substrate size: 100x40x1.0 Substrate material: glass epoxy-resin Solder cream thickness: 0.15</p>
8	Adhesion of Terminal electrode	Shall not come off PC board.	<p>The test samples shall be soldered to the testing board and by the reflow.</p> <p>Applied force: 10 N to X and Y directions. Duration: 5s Solder cream thickness: 0.15</p>
9	Resistance to Vibration	Inductance change: Within±10% No abnormality observed in appearance.	<p>The test samples shall be soldered to the test board by the reflow. Then it shall be submitted to below test conditions.</p> <p>Frequency: 10-55Hz Total Amplitude: 1.5mm (May not exceed acceleration 196m/S<sup>2</sup>) Sweeping Method:10Hz to 55Hz to 10Hz for 1min. Time: 2 hours each in X,Y, and Z Direction. Recovery: At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs.</p>


No.	Test item	Performance	Test details															
10	Solderability	At least 90% of surface of terminal electrode is covered by new solder.	The test samples shall be dipped in flux, and then immersed in molten solder as shown in below. Flux: methanol solution containing rosin 25% Solder temperature: 245±5℃ Time: 5±1.0 sec. Immersion depth: All sides of mounting terminal shall be immersed.															
11	Resistance to soldering	Inductance change: Within±10% No abnormality observed in appearance.	The test sample shall be exposed to reflow oven at 230±5℃ for 40 seconds, with peak temperature at 260±5℃ for 5 seconds, 2 times. Test board thickness: 1.0mm Test board material: glass epoxy-resin															
12	Thermal shock	Inductance change: Within±10% No abnormality observed in appearance.	The test samples shall be soldered to the test board by the reflow. The test samples shall be placed at specified temperature for specified time by step 1 to step 4 as shown below in sequence. The temperature cycles shall be repeated 100 cycles . <table border="1"> <thead> <tr> <th>Phase</th> <th>Temperature(℃)</th> <th>Time(min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-40±3℃</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room Temp</td> <td>Within 3</td> </tr> <tr> <td>3</td> <td>85±2℃</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room Temp</td> <td>Within 3</td> </tr> </tbody> </table>	Phase	Temperature(℃)	Time(min.)	1	-40±3℃	30±3	2	Room Temp	Within 3	3	85±2℃	30±3	4	Room Temp	Within 3
Phase	Temperature(℃)		Time(min.)															
1	-40±3℃		30±3															
2	Room Temp		Within 3															
3	85±2℃		30±3															
4	Room Temp		Within 3															
13	Damp heat life test	Test Method and Remarks The test samples shall be soldered to the test board by the reflow. The test samples shall be placed in thermostatic oven set at specified temperature and humidity as shown in below. Temperature: 60±2℃ Humidity: 90~95%RH Time: 500+24/-0 hrs																
14	Loading under damp heat life test	The test samples shall be soldered to the test board by the reflow. The test samples shall be placed in thermostatic oven set at specified temperature and humidity and applied the rated current continuously as shown in below. Temperature: 60±2℃ Humidity: 90~95%RH Applied current: Rated current Time: 500+24/-0 hrs																
15	Low temperature life test	The test samples shall be soldered to the test board by the reflow. After that, the test samples shall be placed at test conditions as shown in below. Temperature:-40±2℃ Time:500+24/-0 hrs																
16	Loading at high temperature life test	The test samples shall be soldered to the test board by the reflow. Temperature: 85±2℃. Applied current: Rated current Time: 500+24/-0 hrs.																



(7)Soldering

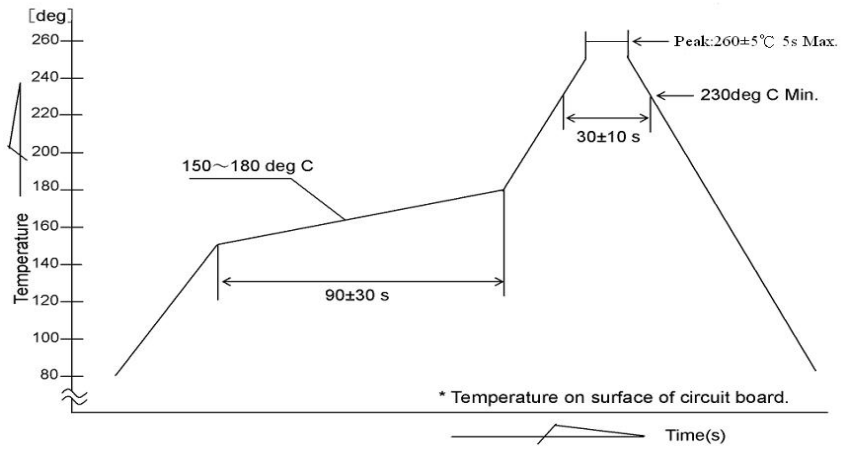

(8)Packaging Information  
8-1,Reel Dimension

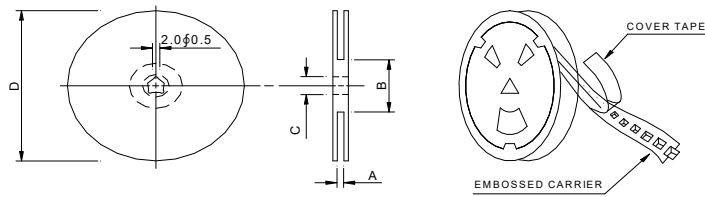


Type	A(mm)	B(mm)	C(mm)	D(mm)
AMPI4018B	12.4±2.0	100±4.0	13.2±0.2	330±2.0

DWG.No.	ASDIQ-SPE-040(00)	PAGE 7/8
---------	-------------------	-------------

Xiamen ASDI Electronics Co.,Ltd.

### 8-2, Tape Dimension

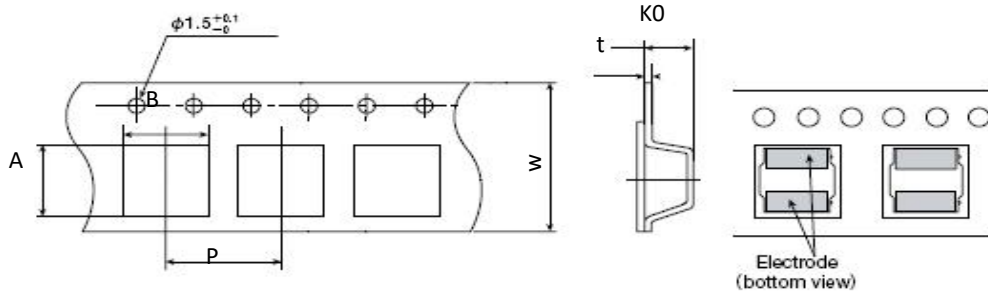

Series	A(mm)	B(mm)	Ko(mm)	P(mm)	W(mm)	t(mm)
AMPI4018B	4.25±0.1	4.25±0.1	2.3±0.1	8.0±0.1	12.0±0.3	0.3±0.05

### 8-3, Packaging Quantity

Type	Chip / Reel
AMPI4018B	3000

### (9)Note

#### ·Storage Conditions

To maintain the solderability of terminal electrodes:

1. ASDI products meet IPC/JEDEC J-STD-020D standard-MSL, level 1.
2. Temperature and humidity conditions: Temperature: 5 to 30deg.C, Humidity: 75% Max.
3. Recommended products should be used within 12 months form the time of delivery.
4. The packaging material should be kept where no chlorine or sulfur exists in the air.

#### ·Transportation

1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
3. Bulk handling should ensure that abrasion and mechanical shock are minimized.

DWG.No.

ASDIQ-SPE-040(00)

PAGE  
8/8

Xiamen ASDI Electronics Co.,Ltd.

单击下面可查看定价，库存，交付和生命周期等信息

[>>ASDI](#)