

MTA2-WNC

FEATURES

- ※ Compact-sized 1.9x4.5mm
- ※ Side actuated
- ※ Sealed with dust proof structure

APPLICATION


- ※ Smart phone
- ※ Digital camera, Medical
- ※ Portable electronic device

SPECIFICATION


Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 100V DC
Dielectric Strength	250V AC/1 minute
Operating Force	180±50gf
Travel	0.20mm
Operating Life	100,000 cycles
Operating Temp.	-30°C ~ +80°C
Storage Temp.	-40°C ~ +90°C

HOW TO ORDER

MTA2 - WNCQR

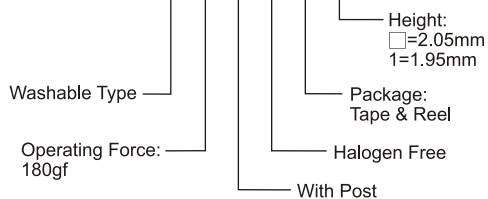

CIRCUIT

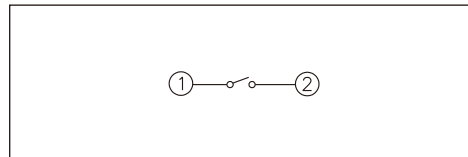


PACKAGE


<Tape & Reel>
 3000 pcs

TACT SWITCH

MTA2-WNCQR

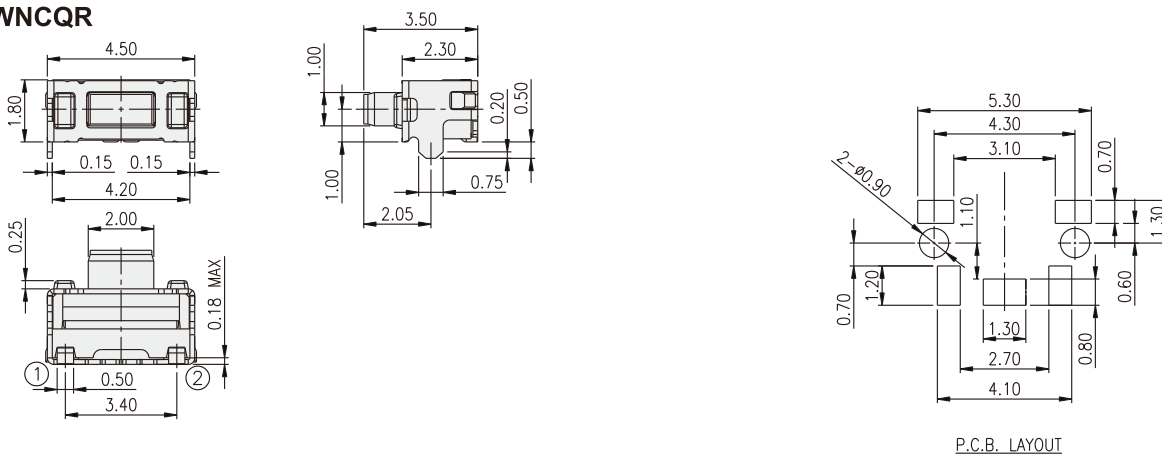

MTA2-WNCQR1

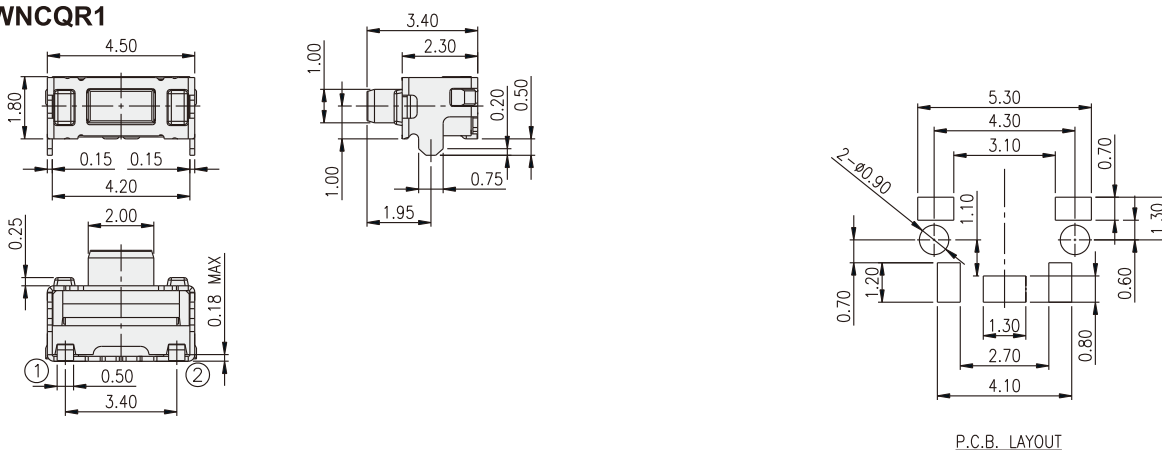

单击下面可查看定价，库存，交付和生命周期等信息

[>>Diptronics\(圆达\)](#)