

# 1 SPECIFICATION



## 1.1 DESCRIPTION

- AEC-Q200 qualified
- Halogen Free
- 155°C maximum total temperature operation
- 7.3x6.8x 3.0mm maximum surface mount package
- Powder alloy core material
- Magnetically shielded, low EMI
- High current carrying capacity, Low core losses
- RoHS compliant

## 1.4 Product Identification

# 1.2 APPLICATIONS

- Engine and Power train Systems
- Electric pumps, motor control and auxiliaries
  - Power train control module (PCU)
  - Engine Control unit (ECU)
  - Transmission Control Unit (TCU)

Body electronics

- Central body control module
- Vehicle access control system
- Headlamps, tail lamps and interior lighting
- Heating ventilation and air conditioning controllers(HVAC)
- Doors, window lift and seat control

Chassis and safety electronics

- Airbag control unit
- Electronic stability control system (ESC)

Driver assistance systems

- Adaptive cruise control (ACC)
- Automatic parking control
- Collision avoidance system
- Car black box system

## 1.3 ENVIRONMENTAL DATA

- Storage temperature range: -55°C to +155 °C
- Operating temperature range: -55°C to +155°C (ambient plus self-temperature rise)
- Solder reflow temperature: J-STD-020D compliant

### CACA-0630-1R0-M-5A

(1) (2) (3) (4) (5)

- (1) Product Series
- (2) Choke Size
- (3) Initial Inductance(L @ 0A):1R0=1.0μH
- (4) Inductance Tolerance:M=L+/-20%
- (5) Max. Operating Temperature:5A=155°C

**1.5 ELECTRICAL PARAMETERS**



Part Number	L0	I <sub>DC</sub>	I <sub>SAT</sub>	DCR	DCR
	( $\mu$ H) $\pm$ 20%	(Amp) Typ.	(Amp) Typ.	Typ. (m $\Omega$ ) @25 $^{\circ}$ C	Max. (m $\Omega$ ) @25 $^{\circ}$ C
CACA-0630-R10-M-5A	0.10	33.0	70.0	0.63	0.72
CACA-0630-R15-M-5A	0.15	24.0	36.0	1.03	1.18
CACA-0630-R33-M-5A	0.33	21.5	25.0	2.9	3.3
CACA-0630-R47-M-5A	0.47	15.0	20.0	3.7	4.3
CACA-0630-R56-M-5A	0.56	14.5	15.0	3.8	4.4
CACA-0630-R68-M-5A	0.68	14.0	14.5	4.8	5.5
CACA-0630-R82-M-5A	0.82	13.5	14.0	5.5	6.5
CACA-0630-1R0-M-5A	1.0	13.0	13.5	6.5	7.5
CACA-0630-1R2-M-5A	1.2	12.5	13.0	8.5	10.0
CACA-0630-1R5-M-5A	1.5	11.0	11.5	9.5	11.0
CACA-0630-2R2-M-5A	2.2	9.5	10.0	12.5	14.5
CACA-0630-3R3-M-5A	3.3	8.5	9.0	24.5	28.0
CACA-0630-4R7-M-5A	4.7	6.2	7.5	40.0	46.5
CACA-0630-6R8-M-5A	6.8	5.0	7.0	54.0	62.0
CACA-0630-8R2-M-5A	8.2	4.5	5.6	58.0	66.5
CACA-0630-100-M-5A	10.0	4.1	5.0	65.0	75.0
CACA-0630-150-M-5A	15.0	3.5	4.0	96.0	110.5
CACA-0630-220-M-5A	22.0	2.5	3.2	135.0	155.0
CACA-0630-330-M-5A	33.0	2.1	2.8	200.0	230.0

**Notes:**

1. Initial Inductance (L0) Test Parameters: 1MHz, 1V, I<sub>DC</sub>=0.0A, +25 $^{\circ}$ C
2. Operating temperature range - 55  $^{\circ}$ C to + 155  $^{\circ}$ C
3. I<sub>DC</sub>(A): DC current (A) that will cause an approximate  $\Delta$ T of 40  $^{\circ}$ C
4. I<sub>SAT</sub>(A): DC current (A) that will cause L0 to drop approximately 30 %
5. The part temperature (ambient + temp rise) should not exceed 155  $^{\circ}$ C under worst case operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.

■ 1.6 MATERIAL LIST



■ Schematics



NO.	Part Name	Material	
1	Electrode	Cu+Sn plating C1100R, Sn:Min.8μm	0.33-33.0μH
		Copper wire+Solder	0.1-0.15μH
2	Core	Metal composite core	
3	Coil	Copper wire, 220°C	

1.7 MECHANICAL PARAMETERS

1.8 RECOMMENDED PCB LAYOUT

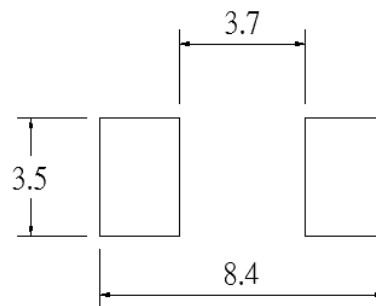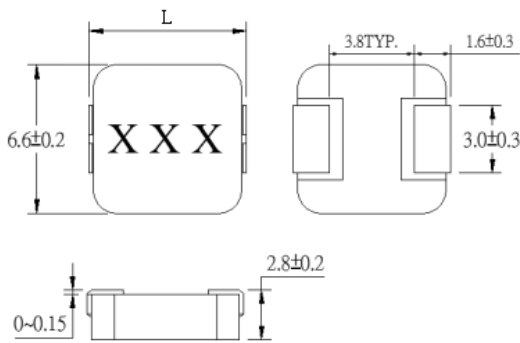



	Dimensions	
Code	0.1-0.15μH	0.33-33.0μH
L	7.4max	7.3max


(unit:mm)


Notes:

1. Marking :Ink Marking
2. Stamping XXX :inductor
3. Tolerances are +/-0.1millimeters unless stated otherwise
4. Dimensions of recommended PCB layout are reference only.
5. Do not route traces nor place vias underneath the inductor. Proper layout is required.

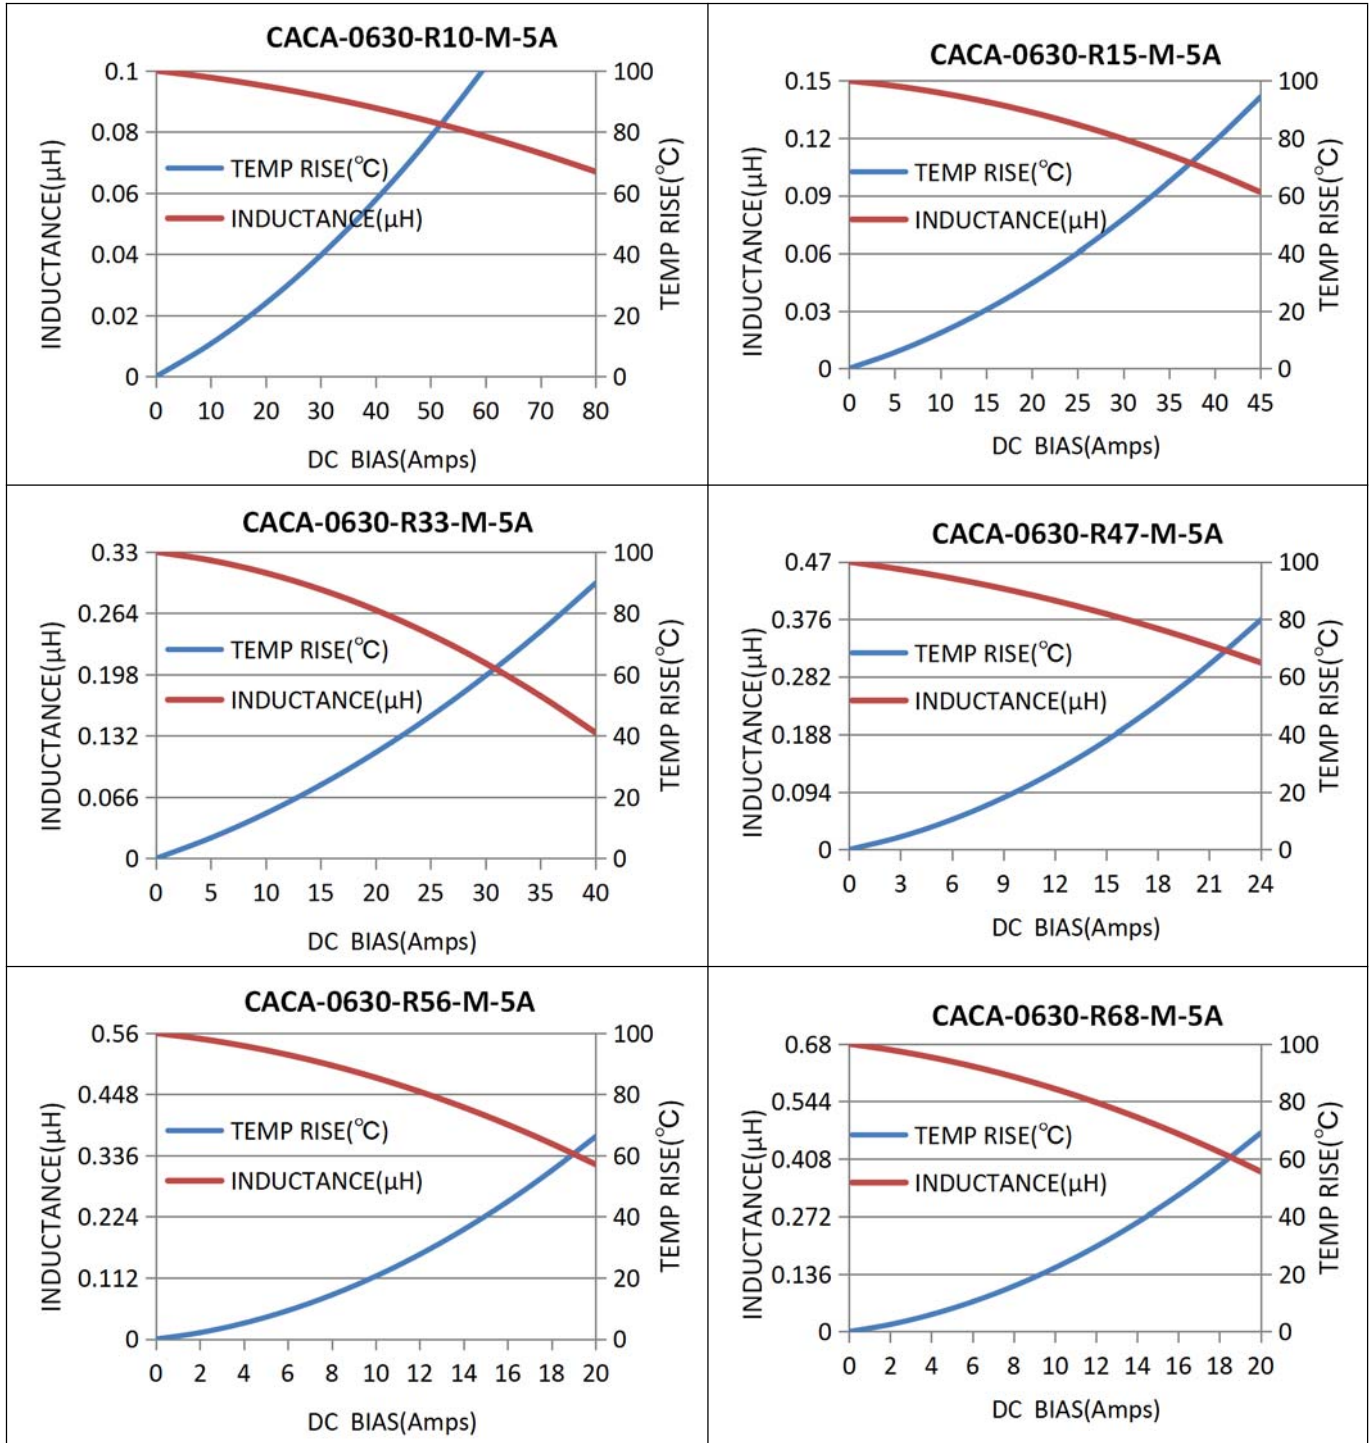
**2 INDUCTANCE & TEMPERATURE RISE VS IDC**

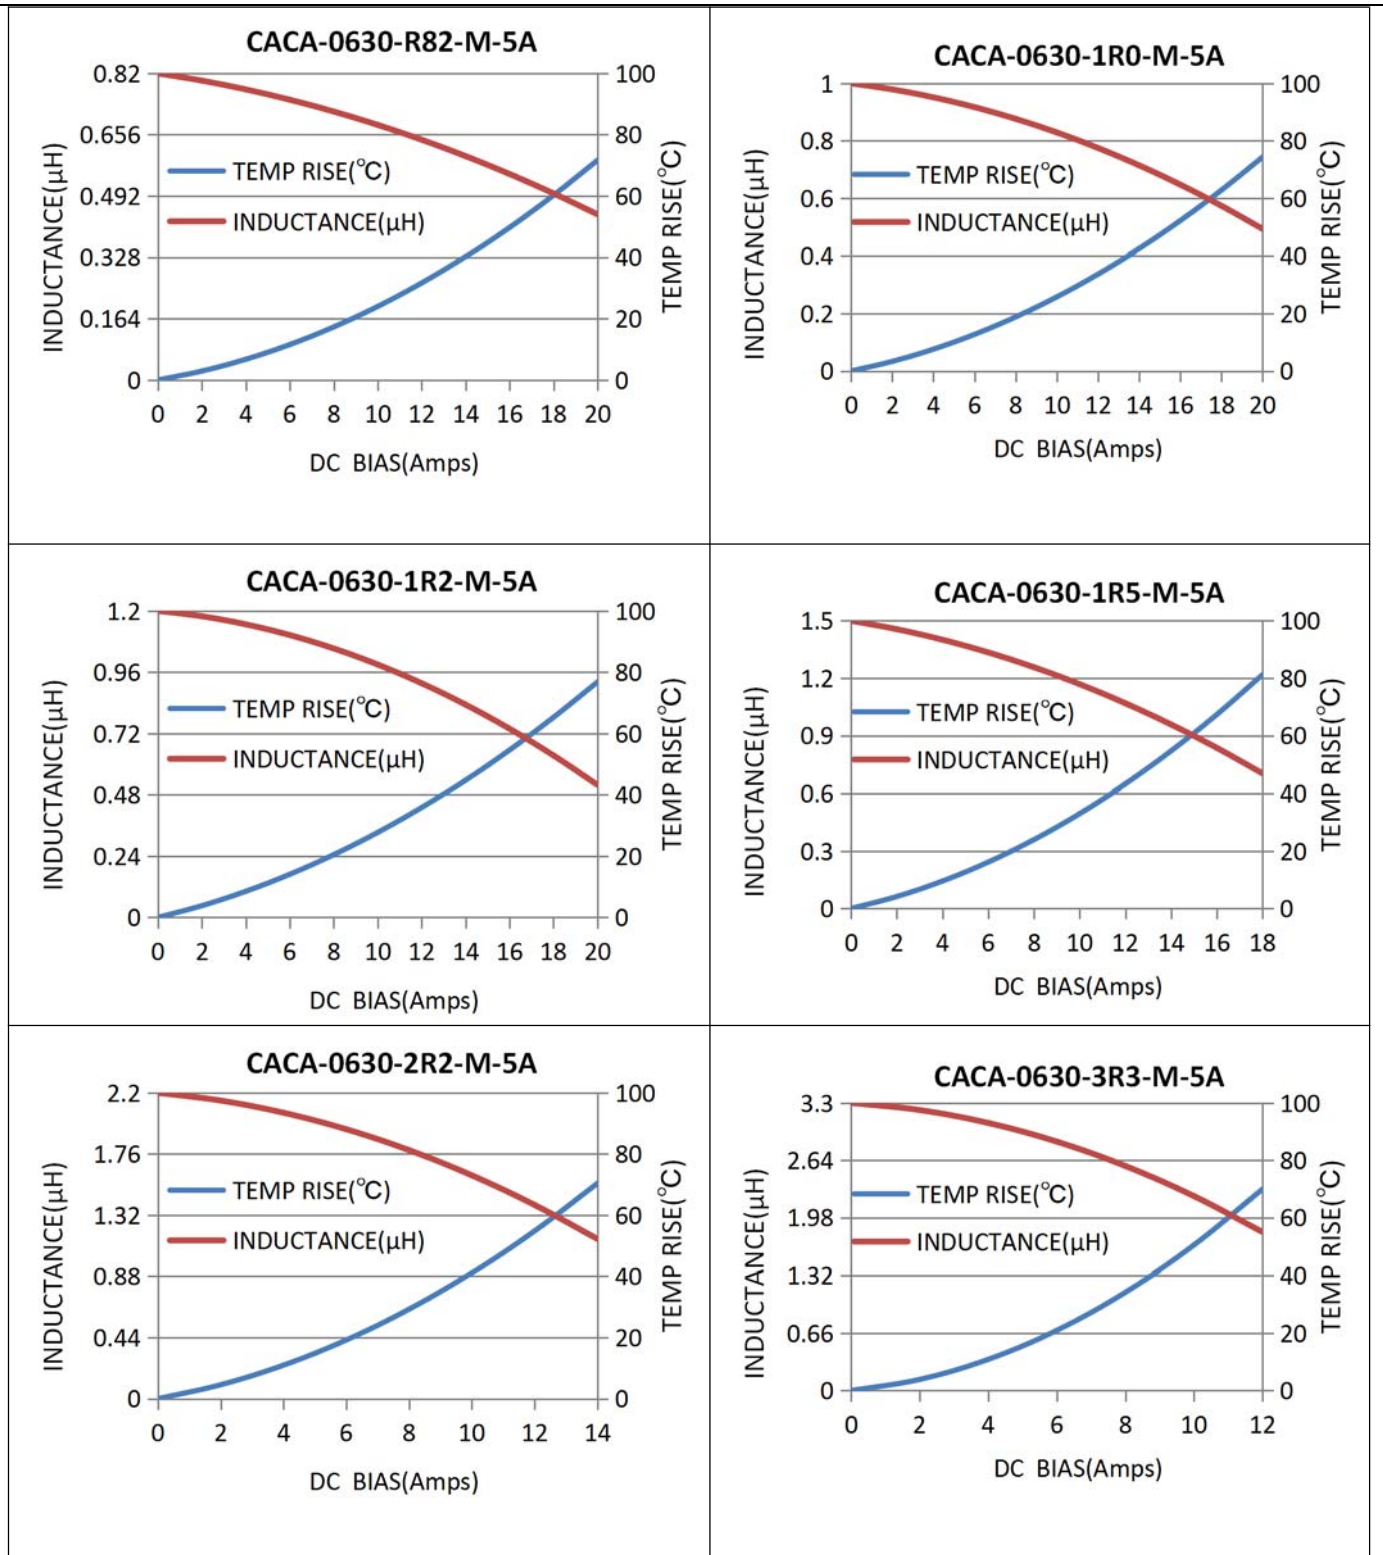

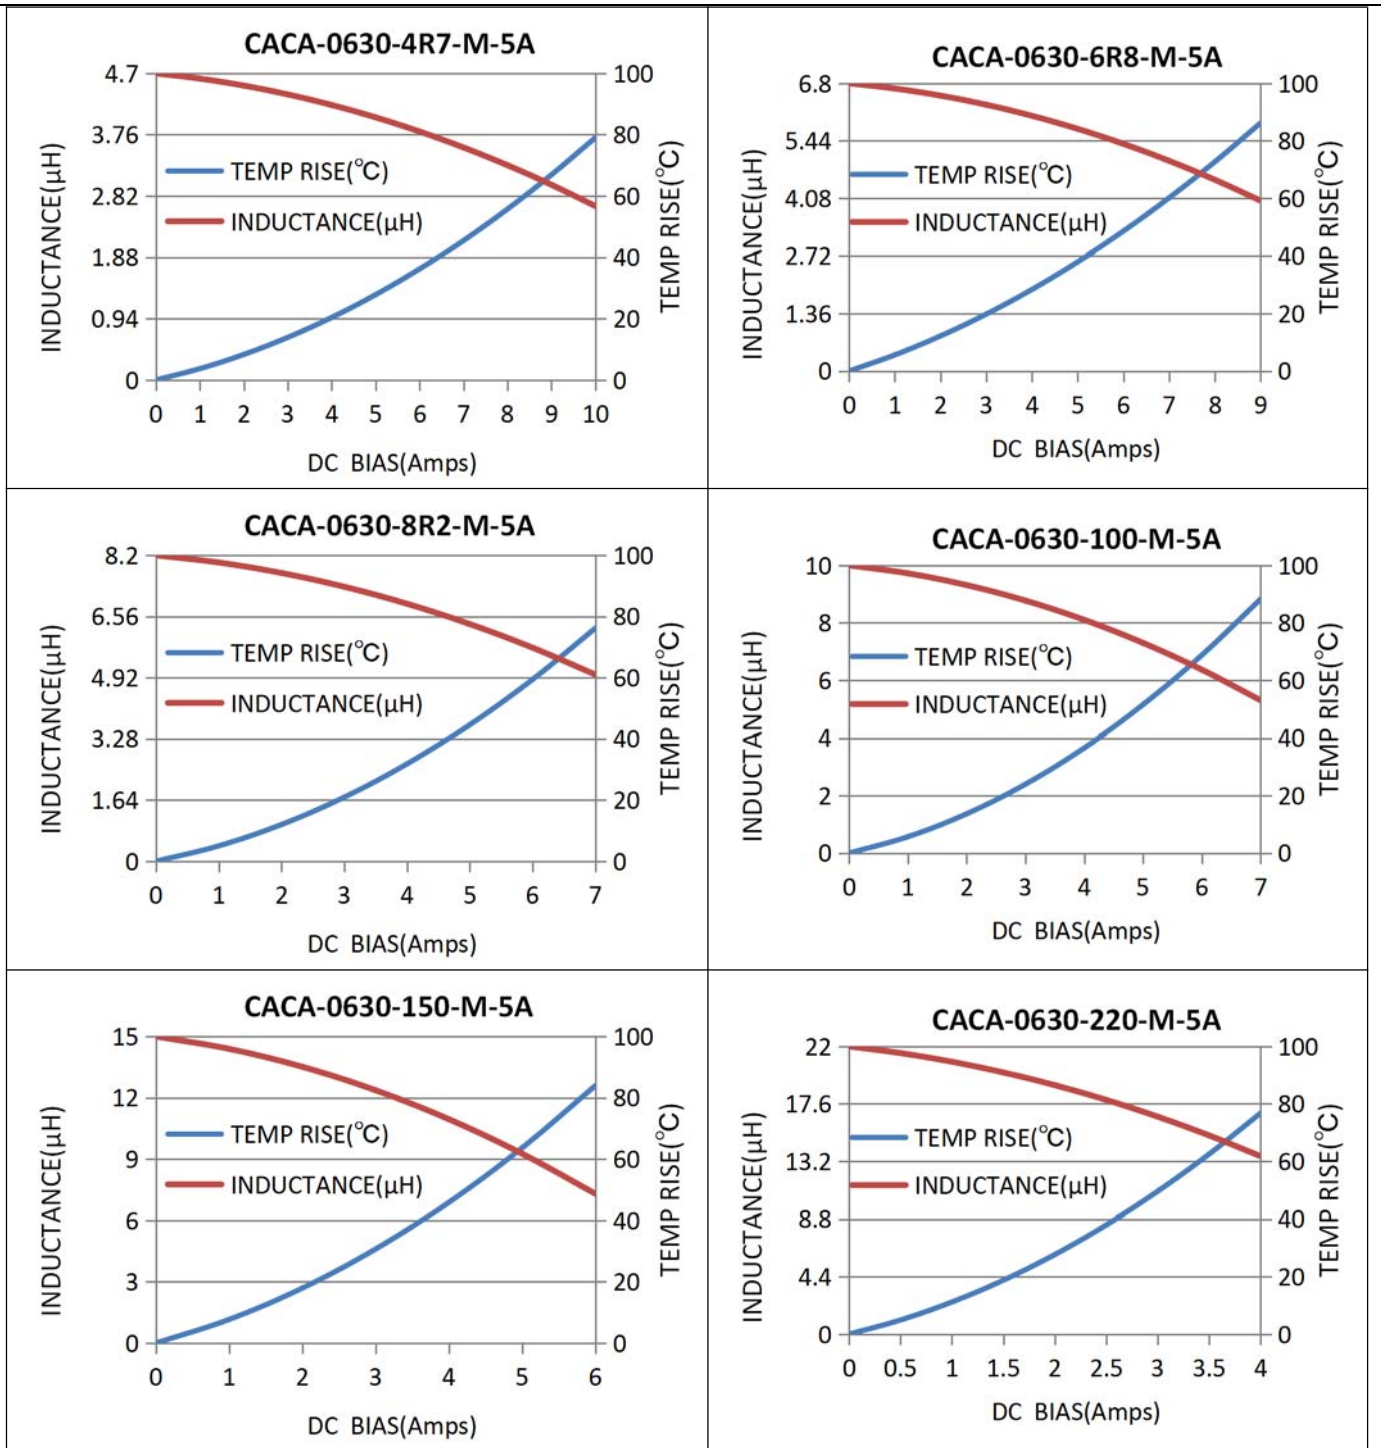

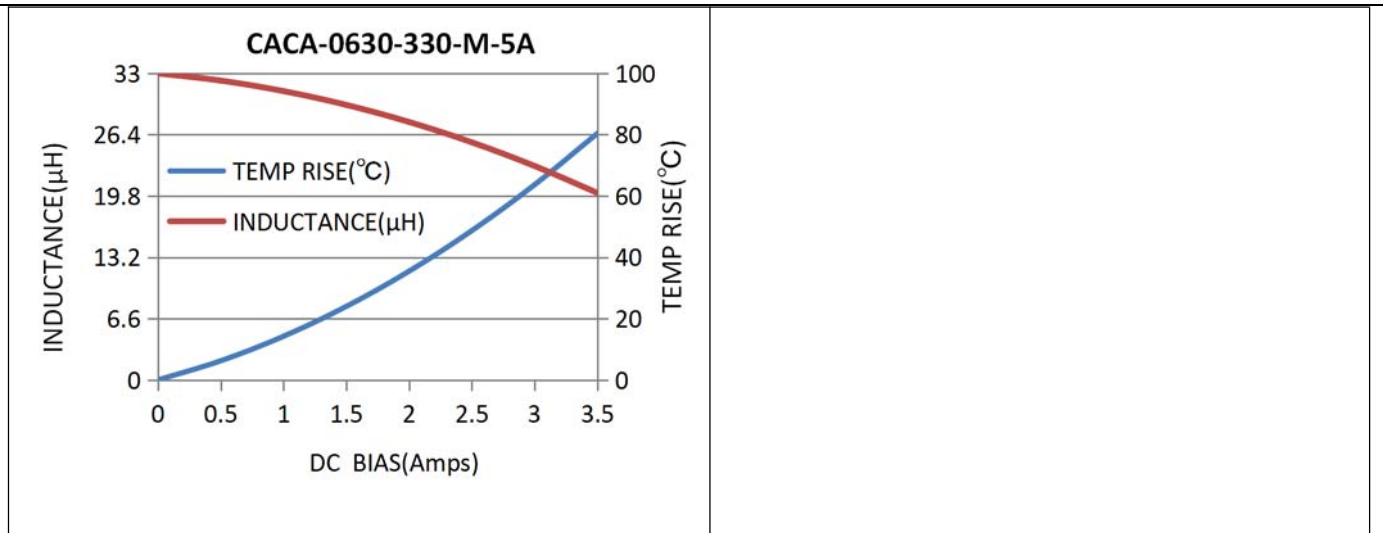


### 3 REFLOW PROFILE

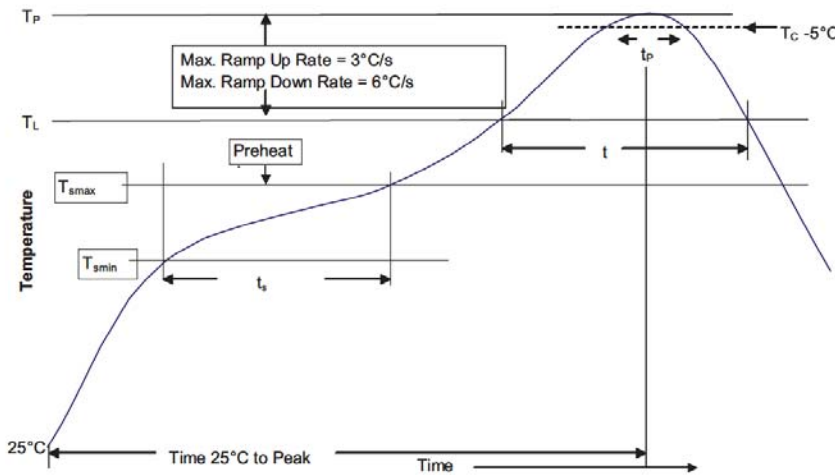
**Table 1 - Standard SnPb Solder ( $T_C$ )**

Package Thickness	Volume $\text{mm}^3$ <350	Volume $\text{mm}^3$ $\geq$ 350
<2.5mm	235°C	220°C
$\geq$ 2.5mm	220°C	220°C

**Table 2 - Lead (Pb) Free Solder ( $T_C$ )**

Package Thickness	Volume $\text{mm}^3$ <350	Volume $\text{mm}^3$ 350 - 2000	Volume $\text{mm}^3$ >2000
<1.6mm	260°C	260°C	260°C
1.6 - 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

**Reference JDEC J-STD-020**

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak		
• Temperature min. ( $T_{smin}$ )	100°C	150°C
• Temperature max. ( $T_{smax}$ )	150°C	200°C
• Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )	60-120 Seconds	60-120 Seconds
Average ramp up rate $T_{smax}$ to $T_p$	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature ( $T_L$ )	183°C	217°C
Time at liquidous ( $t_L$ )	60-150 Seconds	60-150 Seconds
Peak package body temperature ( $T_p$ )*	Table 1	Table 2
Time ( $t_p$ )** within 5 °C of the specified classification temperature ( $T_C$ )	20 Seconds**	30 Seconds**
Average ramp-down rate ( $T_p$ to $T_{smax}$ )	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.


\* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum.

\*\* Tolerance for time at peak profile temperature ( $t_p$ ) is defined as a supplier minimum and a user maximum.




## 4 PACKAGE INFORMATION-mm

### Peel-off Force

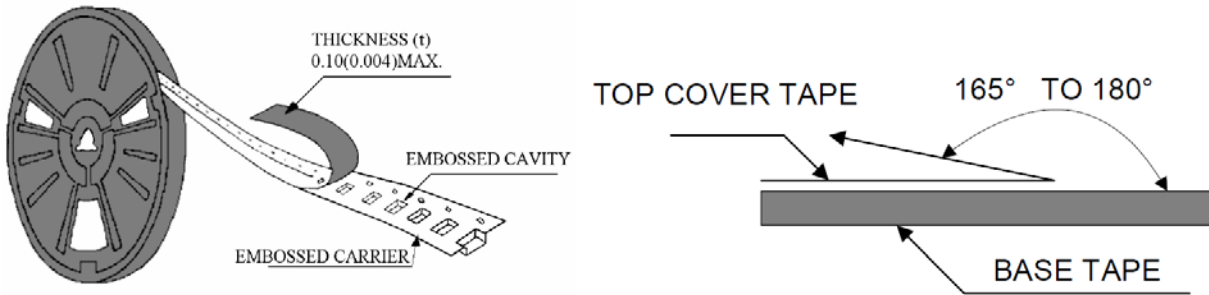


The force for peeling off cover tape is 10 to 70 grams in the arrow direction.


### 4.1 Tape Packaging Dimensions

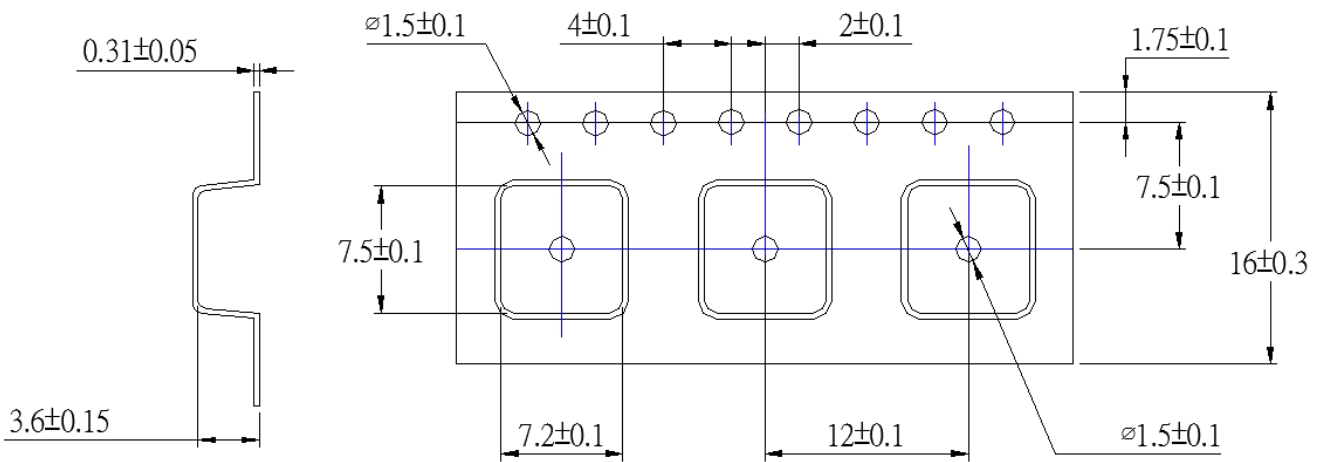

Taping dimension and tape direction, Leader ,Trailer, section dimension

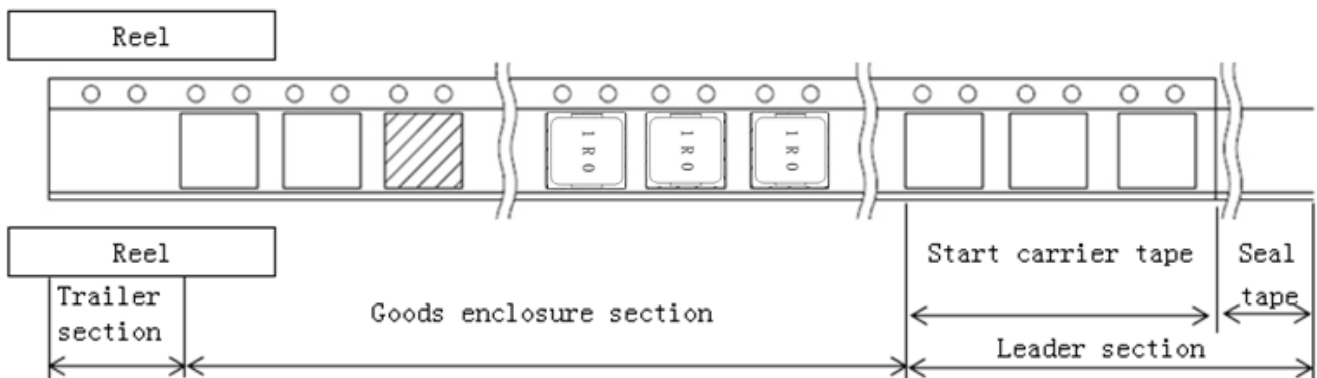


Leader section	Min.400mm
Carrier tape start size	Min.100mm
Trailer section size	Min.160mm

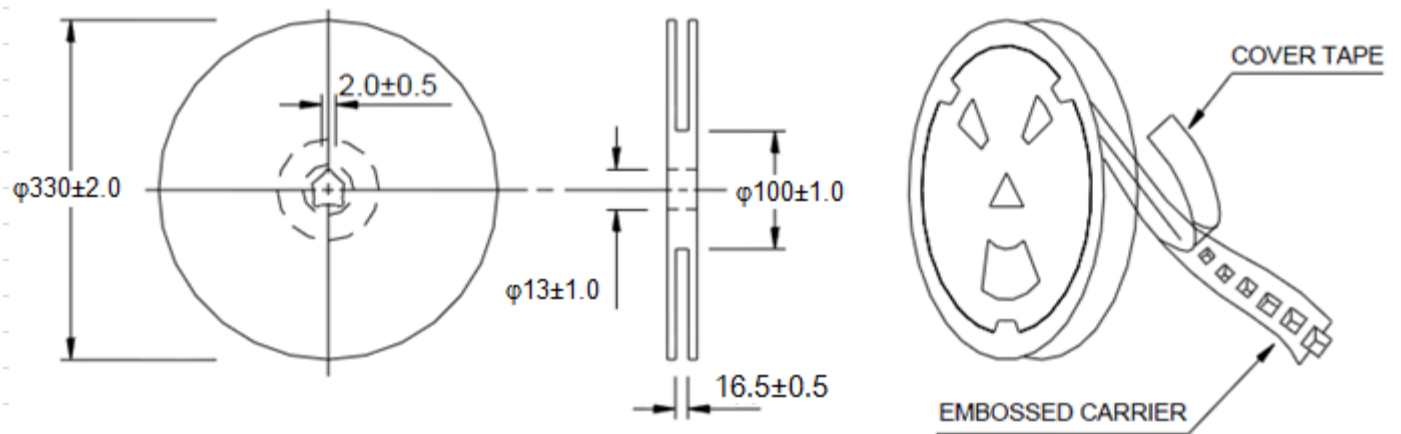**4.2 Reel Dimensions**

**4.3 Taping Quantity**

1500pieces/Reel,

**4.4 Carton**

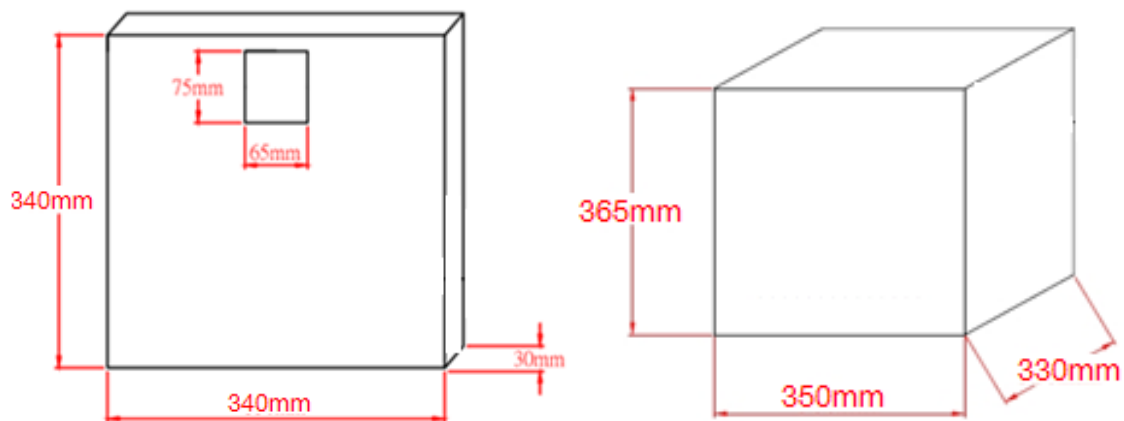Pizza packaging: 1Reel/ Pizza Box



External Packaging :10 Boxes/Carton

单击下面可查看定价，库存，交付和生命周期等信息

[>>CoilForce](#)