

## Data Sheet

**Customer:**

**Product:** Carbon Film Resistor — CFS Series

**Sizes.:** 0204/0207/0309

**Issued Date:** 28-Dec-17

**Edition:** REV.A5



VIKING TECH CORPORATION  
光頡科技股份有限公司  
No.70, Guangfu N. Rd., Hukou  
Township, Hsinchu County  
303, Taiwan (R.O.C)

TEL:886-3-5972931  
FAX:886-3-5972935•886-3-5973494  
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH  
光頡科技股份有限公司高雄分公司  
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,  
806, Taiwan

TEL:886-7-8217999  
FAX:886-7-8228229  
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.  
光頡電子(無錫)有限公司  
No.22 Xixia Road, Machinery & Industry Park,  
National Hi-Tech Industrial Development Zone  
of Wuxi, Wuxi, Jiangsu Province, China  
Zip Code:214028  
TEL:86-510-85203339  
FAX:86-510-85203667•86-510-85203977  
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
28-Dec-17	28-Dec-17	28-Dec-17	28-Dec-17	
<i>Kris Chen</i>	<i>Ben Chang</i>	<i>Ben Chang</i>		

## Carbon Film Resistor

### ■ Features


- SMD style carbon resistor
- Free direction for mounting due to cylindrical design
- High solder ability due to specially plated electrodes
- Electrodes strength is higher than flat chip resistors
- Lower current noise than thick film flat chip resistors
- Suitable for reflow, flow and iron soldering

### ■ Applications

- Telecommunication
- Medical Equipment
- Consumer Product



### ■ Construction

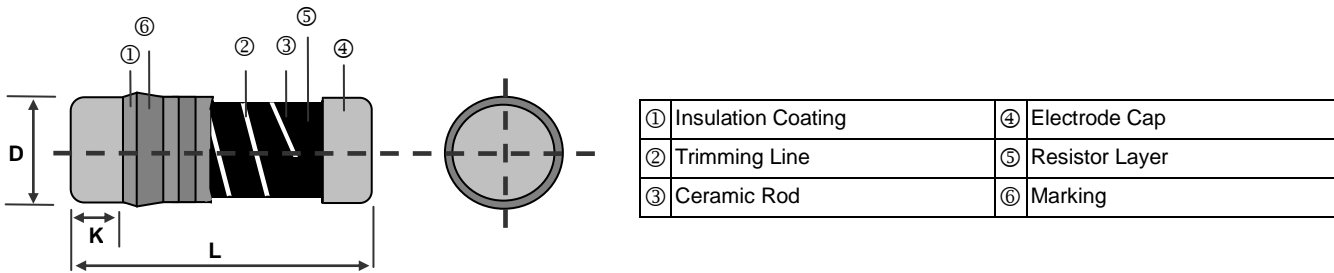


### ■ Dimensions

Unit: mm

Type	L	ΦD	K min.	Wight (g) (1000pcs)	Packaging	
					180mm/7"	330mm/13"
CFS0204	3.50±0.2	1.40±0.15	0.5	19	3000EA	—
CFS0207	5.90±0.2	2.20±0.20	0.5	81	2000EA	—
CFS0309	8.50±0.2	3.20±0.20	0.5	95	—	2500EA

### ■ Derating Curve

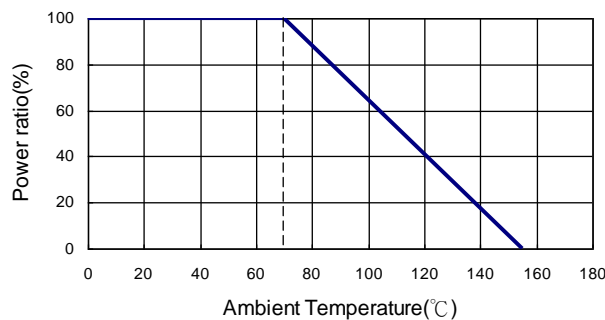

**Carbon Film Resistor**

**Part Numbering**

CFS	0204	G	T	-	V	1000
Product Type	Dimensions (L×ΦD)	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Power Rating	Resistance
	0204: 3.5x1.4 0207: 5.9x2.2 0309: 8.5x3.2	G: ±2% J: ±5%	T: Taping Reel B: Bulk	-: No specified	S: 2W T: 1W U: 1/2W V: 1/4W	0010: 1Ω 1R20: 1.2Ω 1000: 100Ω 2201: 2200Ω 1001: 1KΩ 1004: 1MΩ

**Standard Electrical Specifications**

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range	
					±2%	±5%
0204	1/4W	-55 ~ +155°C	200V	400V	1Ω - 1MΩ	
0207	1/2W		300V	600V	1Ω - 1MΩ	
0309	1W		350V	700V	1Ω - 1MΩ	

**High Power Rating Electrical Specifications**

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range	
					±2%	±5%
0207	1W	-55 ~ +155°C	350V	700V	1Ω - 1MΩ	
0309	2W		350V	700V	1Ω - 1MΩ	

Operating Voltage= $\sqrt{P \cdot R}$  or Max. operating voltage listed above, whichever is lower.  
 Overload Voltage= $2.5 \cdot \sqrt{P \cdot R}$  or Max. overload voltage listed above, whichever is lower.

**Environmental Characteristics**

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	1Ω - 100KΩ: ±350ppm 101KΩ - 500KΩ: ±700ppm 501KΩ - 1MΩ: ±1000ppm	<b>JIS-C-5201-1 4.8</b> -55°C~+125°C, 25°C is the reference temperature
Short Time Overload	±(0.5%+0.05Ω)	<b>JIS-C-5201-1 5.5</b> RCWV*2.5 or Max. overload voltage whichever is lower for 5 seconds
Endurance	±(3%+0.05Ω)	<b>JIS-C-5201-1 7.10</b> Standard: 70±2°C, for 24 hrs High Power: 70±2°C, for 1000 hrs with DC 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	±(5%+0.05Ω)	<b>JIS-C-5201-1 7.9</b> Standard: Room temperature + 100°C, 90%~95% RH, Dipping time: 0.5hr High Power: 40±2°C, 90~95% R.H., for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Solderability	95% min. coverage	<b>JIS-C-5201-1 6.5</b> 235±5°C for 3 seconds
Resistance to Soldering Heat	±(1%+0.05Ω)	<b>JIS-C-5201-1 6.4</b> 260±5°C for 10 seconds
Resistance to Solvent	Epoxy Insulation coating can not be peeled	There are 3 cycles, each circle takes 1 min

RCWV(Rated continuous working voltage)=  $\sqrt{P \cdot R}$  or Max. Operating voltage whichever is lower

**Storage Temperature: 15~28°C; Humidity < 80%RH**

单击下面可查看定价，库存，交付和生命周期等信息

[>>VIKING\(光颧\)](#)