

# DATA SHEET

**CURRENT SENSOR - LOW TCR**

AUTOMOTIVE GRADE

PA Series - Wide Terminal

5%, 1%, 0.5%

sizes 0508/0612/0815/1225

RoHS compliant & Halogen free



**SCOPE**

This specification describes PA series wide-terminal current sensor - low TCR chip resistors made by metal alloy process.

**APPLICATIONS**

- Power supplies
- Laptop
- HDDs
- Car electronics
- Consumer goods
- Consumer
- Telecom / Datacom
- Industrial / Power supply
- Alternative Energy
- Automotive

**FEATURES**

- AEC-Q200 qualified
- Halogen-free Epoxy
- RoHS compliant
- Total lead free without RoHS exemption
- Reduce environmentally hazardous wastes
- High component and equipment reliability
- None forbidden-materials used in products/production
- Low resistances applied to current sensing
- Moisture sensitivity level: MSL 1

**ORDERING INFORMATION - GLOBAL PART NUMBER**

Global part numbers are identified by the series, size, tolerance, packing type, temperature coefficient, taping reel and resistance value.

**GLOBAL PART NUMBER**

**PA    XXXX    X    X    X    XX    XXXX    L**  
 (1)    (2) (3) (4) (5)    (6)    (7)

**(1) SIZE**

0508/0612/1225

**(2) TOLERANCE**

F = ±1%    G = ±2%    J = ±5%

**(3) PACKAGING TYPE**

R = Paper taping reel  
 K= Embossed taping reel

**(4) TEMPERATURE COEFFICIENT OF RESISTANCE**

E = ±50 ppm/°C  
 M = ±75 ppm/°C  
 F = ±100 ppm/°C  
 G= ±200ppm/°C

**(5) TAPING REEL**

07/7W = 7 inch dia. Reel and specific rated power. Detailed power ratings are shown in the Table 2

**(6) RESISTANCE VALUE**

0R001 (1mΩ) ~ 0R005 (5mΩ)  
 There are 3~5 digits indicated the resistance value. Letter R is decimal point.

**(7) DEFAULT CODE**

L = system default code for ordering only

**ORDERING EXAMPLE**


The ordering code for a PA0612 1W chip resistor,TC100 value 0.002Ω (2mR) with ±1% tolerance, supplied in 7-inch tape reel with 5Kpcs quantify is: PA0612FRF070R002L.

**NOTE**

1. All our RSMD products are RoHS compliant. "LFP" of the internal 2D reel label mentions "Lead-Free Process"

**MARKING**

PA0508/PA0612/PA1225



No marking

**CONSTRUCTION**

The resistors are constructed by using outstanding TCR level materials, which make Yageo PA resistors excellent for current sensing application in battery charger circuit & DC-DC converter.

The advanced resistive materials are adopted to get the precisely required resistance.

Finally, the three materials of external terminations (Cu / Ni / matte Tin) are added, as shown in Fig. 5

**Outlines**

For dimension see Table 1

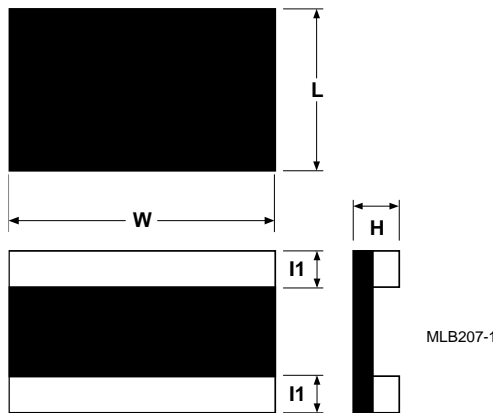


Fig. 2 Chip resistor outlines

**DIMENSION**

Table 1

TYPE	RESISTANCE RANGE	L (mm)	W (mm)	H (mm)	l <sub>r</sub> (mm)
PA0508	1 mΩ ≤ R < 2 mΩ	1.20±0.15	2.00±0.15	0.42±0.15	0.35±0.25
	2 mΩ ≤ R ≤ 5 mΩ	1.20±0.15	2.00±0.15	0.28±0.15	0.35±0.25
PA0612	1 mΩ ≤ R ≤ 5 mΩ	1.6±0.20	3.2±0.20	Max.0.45	0.45±0.20
PA1225	1 mΩ ≤ R ≤ 5 mΩ	3.18±0.25	6.35±0.25	Max.0.55	0.50±0.20

Note: 1. For relevant physical dimensions, please refer to construction outlines.

2. Please contact with sales offices, distributors and representatives in your region before ordering.

**ELECTRICAL CHARACTERISTICS**

Table 2

TYPE	POWER RATING (1)		TOLERANCE	RESISTANCE RANGE	TEMPERATURE COEFFICIENT OF RESISTANCE
	07	7W			
PA0508	1W	---	± 0.5% (By request)	1mΩ ≤ R < 2mΩ	±200 ppm/°C
				2mΩ ≤ R ≤ 5mΩ	± 100 ppm/°C
PA0612	2W	---	±1% ±5%	1mΩ ≤ R < 2mΩ	± 150 ppm/°C
				2mΩ ≤ R ≤ 5mΩ	± 100 ppm/°C
PA1225	1.5W	3W		1 mΩ ≤ R ≤ 5 mΩ	±75ppm/°C

Note: 1. Global part number (code I0 - I1)

2. Please contact with sales offices, distributors and representatives in your region before ordering.

**FUNCTIONAL DESCRIPTION**

**OPERATING TEMPERATURE RANGE**

PA0508/PA0612 : -55°C to +155°C

PA1225 : -55°C to +170°

**POWER RATING**

Standard rated power at 70°C:

PA0508 = 1W

PA0612 = 2W

PA1225 = 1.5W/3W

**RATED VOLTAGE**

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:

$$V = \sqrt{P \cdot R}$$

Where

V = Continuous rated DC or AC (rms) working voltage (V)

P = Rated power (W)

R = Resistance value ( $\Omega$ )

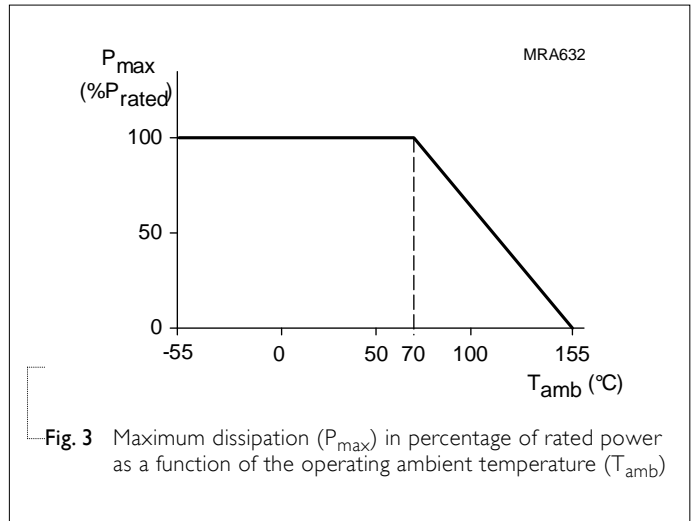


Fig. 3 Maximum dissipation (P<sub>max</sub>) in percentage of rated power as a function of the operating ambient temperature (T<sub>amb</sub>)

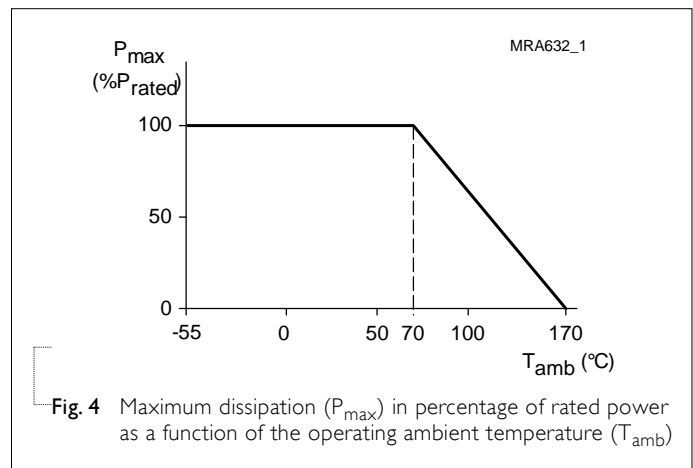


Fig. 4 Maximum dissipation (P<sub>max</sub>) in percentage of rated power as a function of the operating ambient temperature (T<sub>amb</sub>)

**PACKING STYLE AND PACKAGING QUANTITY**

Table 3 Packing style and packaging quantity

PACKING STYLE	REEL DIMENSION	PA0508	PA0612	PA1225
Paper taping reel (R)	7" (178 mm)	5,000	5000	---
Embossed taping reel (K)	7" (178 mm)	---	---	4000

**PAPER TAPE**

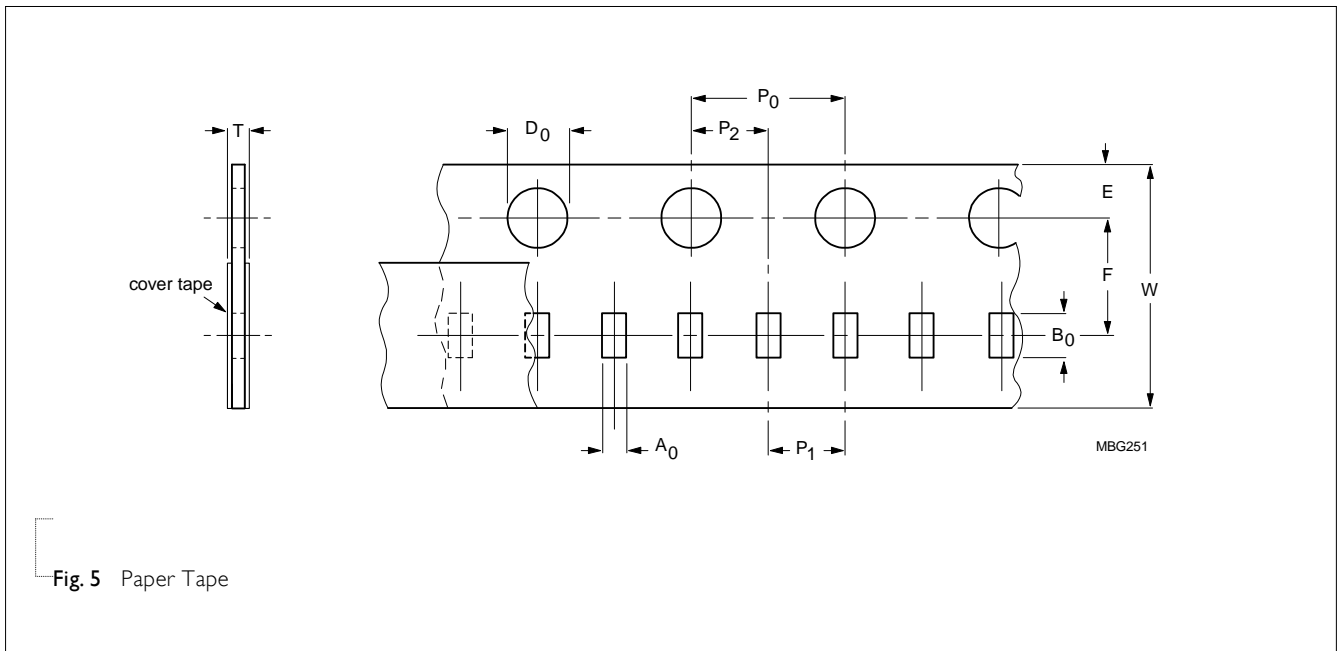


Fig. 5 Paper Tape

Table 4 Dimensions of paper tape for relevant chip resistors size

SIZE	SYMBOL										Unit: mm
	A <sub>0</sub>	B <sub>0</sub>	W	E	F	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	ØD <sub>0</sub>	T	
PA0508	1.60±0.10	2.35±0.10	8.00±0.30	1.75±0.10	3.50±0.10	4.00±0.10	4.00±0.10	2.00±0.10	1.50±0.10	0.60±0.10	
PA0612	1.80±0.15	3.50±0.15	8.00±0.30	1.75±0.10	3.50±0.10	4.00±0.10	4.00±0.10	2.00±0.10	1.50±0.10	0.60±0.10	

**EMBOSSED TAPE**

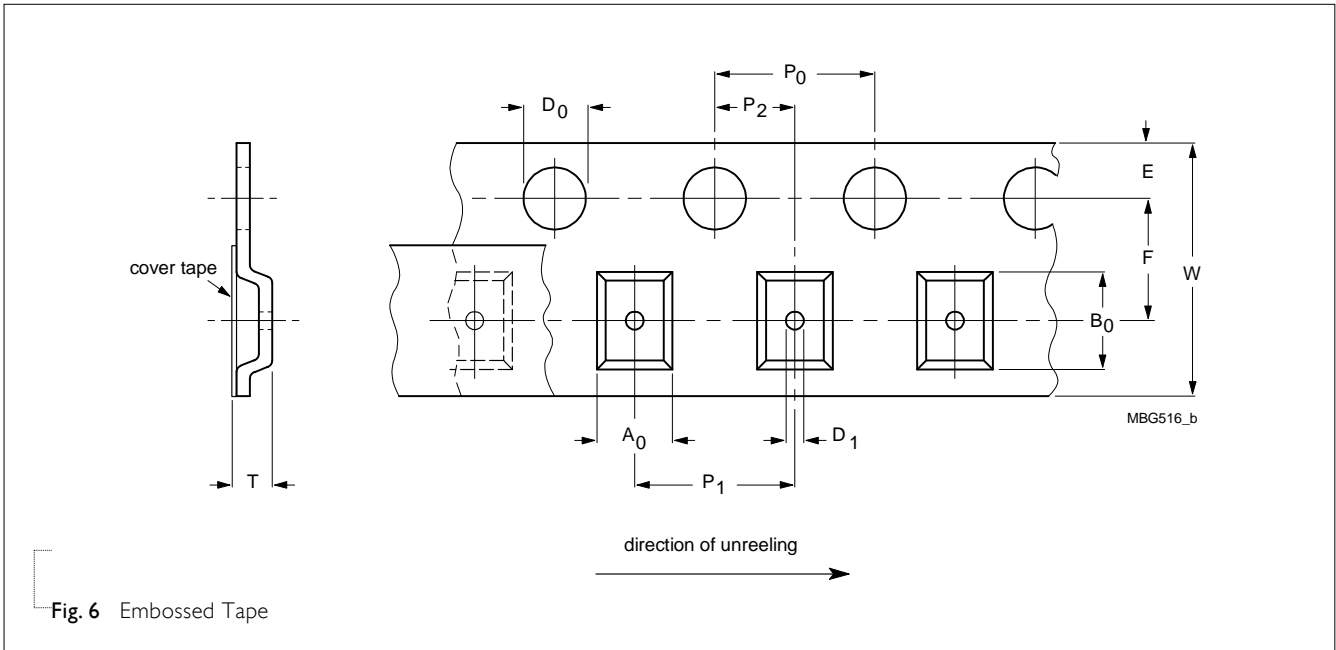


Fig. 6 Embossed Tape

Table 5 Dimensions of embossed tape for relevant chip resistors size

SIZE	SYMBOL											Unit: mm
	A <sub>0</sub>	B <sub>0</sub>	W	E	F	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	ØD <sub>0</sub>	D <sub>1</sub>	T	
PA1225	3.40±0.15	6.70± 0.15	12.0± 0.30	1.75± 0.10	5.50± 0.10	4.00± 0.10	4.00± 0.10	2.00± 0.10	1.55± 0.10	0.80± 0.15	0.75± 0.15	

**REEL SPECIFICATION**

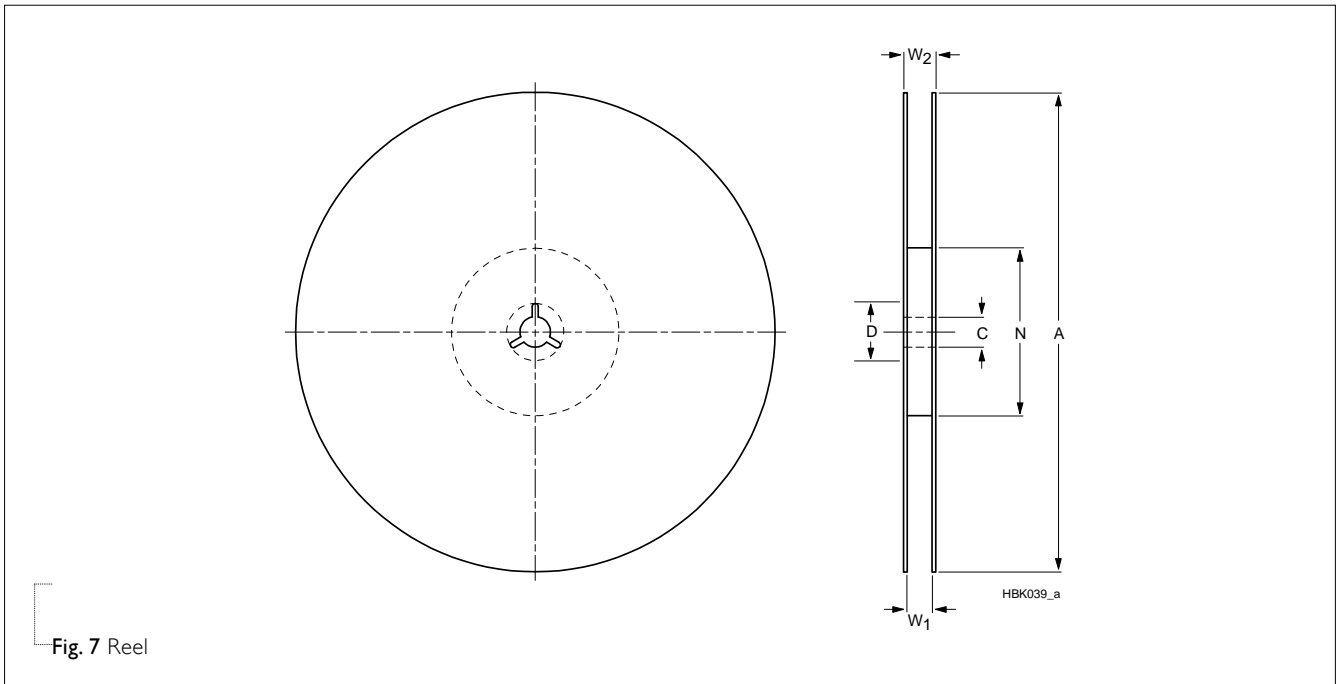


Fig. 7 Reel

Table 6 Dimensions of reel specification for relevant chip resistors size

SIZE	SYMBOL	Unit: mm					
		8 mm TAPE WIDE	A	N	C	D	W <sub>1</sub>
PA0508	7" (Ø178 mm)	178.0±5	60.0+1/-0	13.00±0.5	17.70±0.5	9.0± 0.5	12.4
PA0612	7" (Ø178 mm)	178.0±5	60.0+1/-0	13.00±0.5	17.70±0.5	9.0± 0.5	12.4

SIZE	SYMBOL	Unit: mm					
		12 mm TAPE WIDE	A	N	C	D	W <sub>1</sub>
PA2512	7" (Ø178 mm)	178.0 ±5	60.0 +1/-0	13.00±0.5	21.0±0.8	13.6±0.5	18.3+1/-0



**SOLDERING PROFILES**

For recommended soldering profiles, please refer to data sheet “Chip resistors mounting”.

**FOOTPRINT**

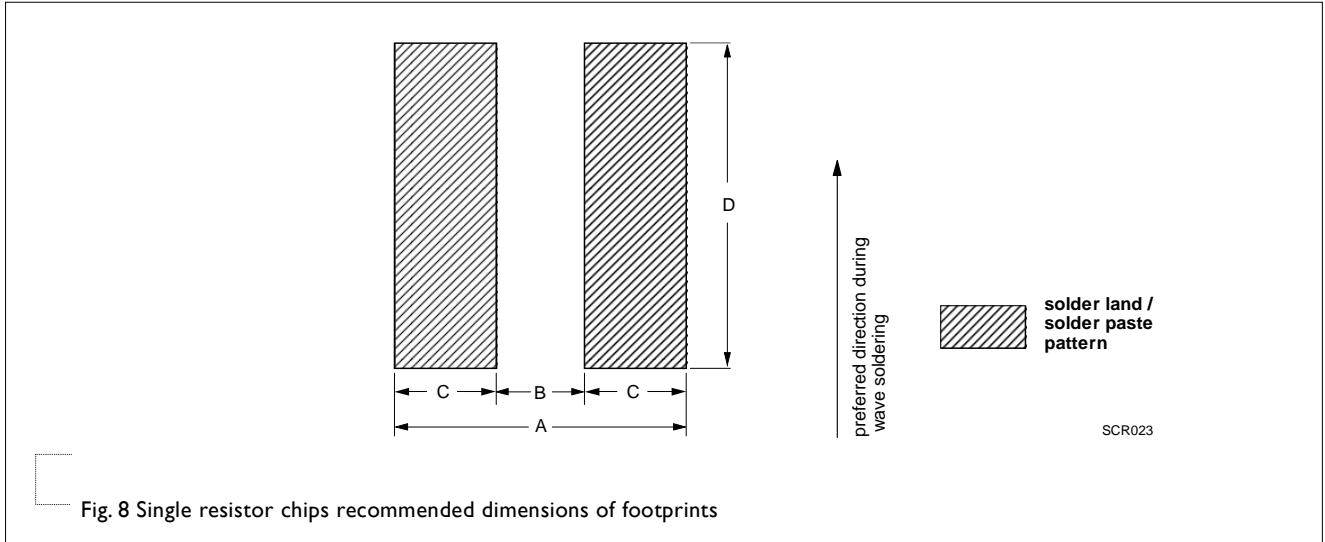


Table 7 Footprint dimensions

SIZE	RESISTANCE RANGE	Unit: mm			
		A	B	C	D
PA0508	$1\text{m}\Omega \leq R \leq 5\text{m}\Omega$	3.05	0.45	1.3	2.65
PA0612	$1\text{m}\Omega \leq R \leq 5\text{m}\Omega$	4.60	0.60	2	3.68
PA1225	$1\text{m}\Omega \leq R \leq 5\text{m}\Omega$	6.1	1.4	2.35	7.25

**TESTS AND REQUIREMENTS**

Table 8 Test condition, procedure and requirements

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Life/ Operational Life/ Endurance	IEC 60115-1 4.25.1	1,000 hours at 70±2 °C applied RCWV 1.5 hours on, 0.5 hour off, still air required	±(1%+0.0005 Ω)
High Temperature Exposure/ Endurance at Upper Category Temperature	IEC 60068-2-2	1,000 hours at maximum operating temperature depending on specification, unpowered No direct impingement of forced air to the parts Tolerances: 0508/0612: 155±3 °C 1225: 170±3 °C	±(1%+0.0005 Ω)
Moisture Resistance	MIL-STD-202 Method 106	Each temperature / humidity cycle is defined at 8 hours (method 106F), 3 cycles / 24 hours for 10d with 25 °C / 65 °C 95% R.H, without steps 7a & 7b, unpowered Parts mounted on test-boards, without condensation on parts Measurement at 24±2 hours after test conclusion	±(0.5%+0.0005 Ω)
Short Time Overload	IEC60115-1 4.13	5 times of rated power for 5 seconds at room temperature	±(0.5%+0.0005 Ω) No visible damage
Board Flex/ Bending	IEC60068-2-21	Device mounted on glass epoxy resin PCB test board (FR4), 2 mm bending Bending time: 60±5 seconds	±(1%+0.0005 Ω) No visible damage

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Solderability - Wetting	J-STD-002B test B	Electrical Test not required Magnification 50X SMD conditions: 1 <sup>st</sup> step: method B, aging 4 hours at 155 °C dry heat 2 <sup>nd</sup> step: leadfree solder bath at 245±3 °C Dipping time: 3±0.5 seconds	Well tinned (≥95% covered) No visible damage
- Resistance to Soldering Heat	IEC 60068-2-58	Specimen passed 3 times reflow temperature at 260°C, with solder.	±(0.5%+0.0005 Ω) No visible damage

**REVISION HISTORY**

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
----------	------	---------------------	-------------

Version 0	Jan. 07, 2023	-	- New datasheet
-----------	---------------	---	-----------------

LEGAL DISCLAIMER

YAGEO, its distributors and agents (collectively, "YAGEO"), hereby disclaims any and all liabilities for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics. YAGEO may make changes, modifications and/or improvements to product related information at any time and without notice.

YAGEO makes no representation, warranty, and/or guarantee about the fitness of its products for any particular purpose or the continuing production of any of its products. To the maximum extent permitted by law, YAGEO disclaims (i) any and all liability arising out of the application or use of any YAGEO product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability.

YAGEO products are designed for general purpose applications under normal operation and usage conditions. Please contact YAGEO for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property: Aerospace equipment (artificial satellite, rocket, etc.), Atomic energy-related equipment, Aviation equipment, Disaster prevention equipment, crime prevention equipment, Electric heating apparatus, burning equipment, Highly public information network equipment, data-processing equipment, Medical devices, Military equipment, Power generation control equipment, Safety equipment, Traffic signal equipment, Transportation equipment and Undersea equipment, or for any other application or use in which the failure of YAGEO products could result in personal injury or death, or serious property damage. Particularly **YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.**

Information provided here is intended to indicate product specifications only. YAGEO reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by PCN.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Yageo\(国巨\)](#)