

# Specification for Approval

**Date:** 2024/06/03

**Customer :** \_\_\_\_\_

**TAI-TECH P/N:** TMIM0402SV-Series(G)-D-HD

**CUSTOMER P/N:** \_\_\_\_\_

**DESCRIPTION:** \_\_\_\_\_

**QUANTITY:** \_\_\_\_\_ pcs

<b>REMARK:</b>		
Customer Approval Feedback		

- 西北臺慶科技股份有限公司  
 TAI-TECH Advanced Electronics Co., Ltd  
Headquarter:  
 NO.1 YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI,  
 TAO-YUAN HSIEN, TAIWAN, R.O.C.  
 TEL: +886-3-4641148 FAX: +886-3-4643565  
 http://www.tai-tech.com.tw  
 E-mail: sales@tai-tech.com.tw
  
- 臺慶精密電子(昆山)有限公司  
 TAI-TECH ADVANCED ELECTRONICS(KUNSHAN) CO., LTD  
 SHINWHA ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN,  
 JIANG-SU, CHINA  
 TEL: +86-512-57619396 FAX: +86-512-57619688  
 E-mail: sales@tai-tech.cn
  
- 慶邦電子元器件(泗洪)有限公司  
 TAIPAQ ELECTRONICS (SIHONG) CO., LTD  
 THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHEBEI ROAD,  
 ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, JIANGSU  
 PROVINCE, P. R. CHINA  
 TEL: +86-527-88601191 FAX: +86-527-88601190  
 E-mail: sales@taipaq.cn

Sales Dep.

APPROVED	CHECKED
Eric Kuan	Zhang mengmeng

R&D Center

APPROVED	CHECKED	DRAWN
Sky Luo	Mr.Liang	Tang pingping



# SMD Power Inductor

## 1. Features


1. Low loss realized with low DCR.
2. High performance realized by metal dust core.
3. Ultra low buzz noise, due to composite construction.
4. 100% Lead(Pb)-Free and RoHS compliant.
5. High reliability -Reliability test complied with AEC-Q200.




## 2. Applications

Automotive applications.

## 3. Dimensions

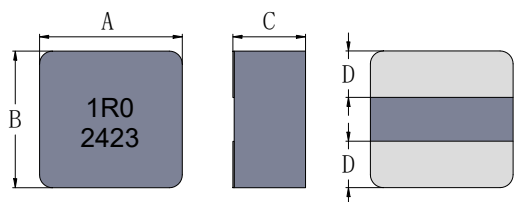

### Recommend PC Board Pattern

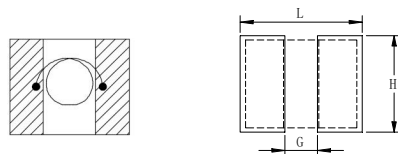


A	B	C	D
4.1±0.2	4.1±0.2	1.8±0.2	1.3±0.3

Unit: mm

L	G	H
4.5	1.2	4.5

- Note:
1. PCB layout is referred to standard IPC-7351B.
  2. The above PCB layout reference only.
  3. Recommend solder paste thickness at 0.12mm and above.

## 4. Part Numbering



- A: Series
- B: Dimension
- C: Material
- D: Inductance
- E: Inductance Tolerance
- F: Code
- G: Date Code

AxBxC

1R0=1.0uH

M=±20%, G: Coating

Marking: Black, 1R0 and 2423 (24 YY, 23 WW, follow production date).


## 5. Specification

Part Number	Inductance ( $\mu\text{H}$ ) $\pm 20\%$ @ 0 A DC	$I_{\text{rms}}$ ( A )		$I_{\text{sat}}$ ( A )		DCR ( $\text{m}\Omega$ )	
		Typ	Max	Typ	Max	Typ	Max
TMIM0402SV-R10MG-D-HD	0.10	34.0	30.5	37.0	32.0	1.3	1.6
TMIM0402SV-R12MG-D-HD	0.12	31.0	28.0	33.0	28.0	1.3	1.6
TMIM0402SV-R15MG-D-HD	0.15	28.5	25.5	30.0	26.0	1.7	2.05
TMIM0402SV-R20MG-D-HD	0.20	27.0	24.3	28.0	25.0	1.9	2.2
TMIM0402SV-R22MG-D-HD	0.22	26.0	23.5	26.0	24.0	1.9	2.2
TMIM0402SV-R33MG-D-HD	0.33	17.0	15.0	18.0	16.0	3.3	4.0
TMIM0402SV-R47MG-D-HD	0.47	16.0	14.0	16.0	14.0	4.5	5.4
TMIM0402SV-R56MG-D-HD	0.56	15.0	13.0	15.0	13.0	4.8	5.6
TMIM0402SV-R68MG-D-HD	0.68	13.0	11.0	13.0	11.0	5.5	6.6
TMIM0402SV-1R0MG-D-HD	1.00	12.0	10.0	11.0	9.5	8.2	9.0
TMIM0402SV-1R2MG-D-HD	1.20	11.0	9.5	10.5	9.0	9.6	11.5
TMIM0402SV-1R5MG-D-HD	1.50	10.0	9.0	8.5	7.6	12.5	15.0
TMIM0402SV-2R2MG-D-HD	2.20	9.0	8.0	7.2	6.5	17.5	21.0
TMIM0402SV-4R7MG-D-HD	4.70	5.5	5.0	5.0	4.5	42.0	46.0

Note:

1. Test frequency :  $L_s$  : 1MHz /1.0V.
2. All test data referenced to 25°C ambient.
3. Testing Instrument(equ.) : Agilent 4284A, E4991A, 4339B, KEYSIGHT E4980A/AL, chroma3302, 3250, 16502.
4. Heat Rated current ( $I_{\text{rms}}$ ) : will cause the coil temperature rise approximately  $\Delta T$  of 40°C.
5. Saturation current ( $I_{\text{sat}}$ ) : will cause  $L_0$  to drop approximately 30%.
6. The part temperature (ambient + temp rise) should not exceed 150°C under worst case operating conditions. Circuit design, component, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
7.  $I_{\text{rms}}$  Testing : temperature rise is highly dependent on many factors including pcb land pattern, trace size, and proximity to other components. Therefore temperature rise should be verified in application conditions.
8. Rated DC current : the lower value of  $I_{\text{rms}}$  and  $I_{\text{sat}}$ .
9. Rated voltage 35V DC, the application of voltage depends on many factors, over voltage may cause components failure, high temperature, and burn-out, user needs to verify for appropriate usage.


## 6. Material List



NO	Items	Materials
1	Core	Metal Powder.
2	Wire	Polyester Wire.
3	paint	Epoxy resin.
4	Terminal	Plating.
5	Ink	Halogen-free ketone


## 7. Packaging Information

### 7-1. Reel Dimension

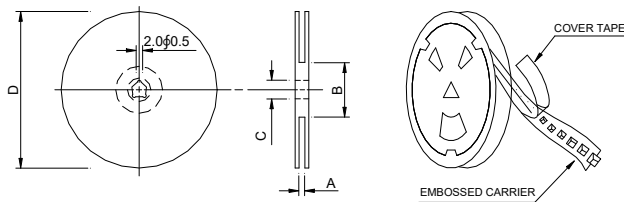

Type	A(mm)	B(mm)	C(mm)	D(mm)
13" x 12mm	12.4+2/-0	100±2	13+0.5/-0.2	330

### 7-2. Tape Dimension

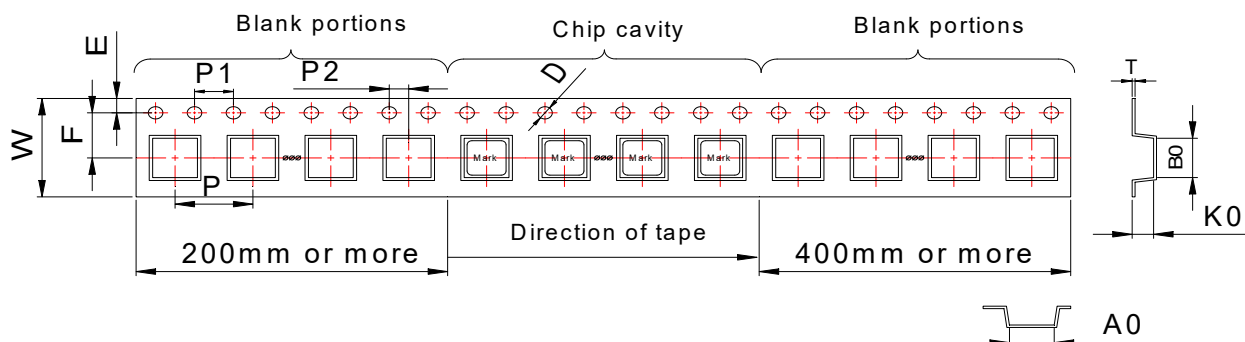


B0	A0	K0	W	P	P1	P2	E	F	T	D
4.5±0.1	4.5±0.1	2.2±0.1	12.0±0.3	8.0±0.1	4.0±0.1	2.0±0.1	1.75±0.1	5.5±0.1	0.35±0.05	1.5+0.1/-0.0

Unit: mm

### 7-3. Packaging Quantity

TMIM	0402
Pcs/Reel	3000


### 7-4. Tearing Off Force



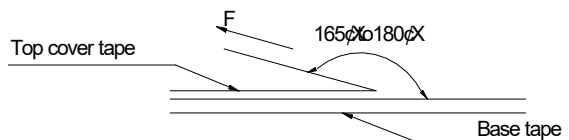



The force for tearing off cover tape is 10 to 100 grams in the arrow direction under the following conditions (referenced ANSI/EIA-481-D-2008 of 4.11 standard).

Tearing Speed mm	Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)
300±10	5~35	45~85	860~1060

### 8. Reliability and Test Condition

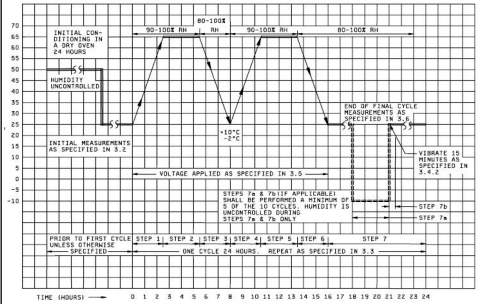Item	Performance	Test Condition															
Operating temperature	-55~+150°C(Including self - temperature rise)	NA															
Storage temperature and Humidity range	1. -10~+40°C, 50~60%RH (Product with taping) 2. -55~+150°C(on board)	NA															
<b>Electrical Performance Test</b>																	
Inductance	Refer to standard electrical characteristics list.	HP4284A, CH11025, CH3302, CH1320, CH1320S LCR Meter.															
DCR		CH16502, Agilent33420A Micro-Ohm Meter.															
Saturation Current (Isat)	Approximately ΔL30%	Saturation DC Current (Isat) will cause L0 to drop ΔL(%).															
Heat Rated Current (Irms)	Approximately ΔT40°C	Heat Rated Current (Irms) will cause the coil temperature rise ΔT(°C). 1. Applied the allowed DC current. 2. Temperature measured by digital surface thermometer.															
<b>Reliability Test</b>																	
High Temperature Exposure(Storage) AEC-Q200		Preconditioning : run through IR reflow for 3 times. ( IPC/JEDEC J-STD-020E Classification Reflow Profiles) Temperature : 150±2°C (Inductor, ambient + temp rise). Duration : 1000hrs Min. Measured at room temperature after placing for 24±2 hrs.															
Temperature Cycling AEC-Q200		Preconditioning : run through IR reflow for 3 times. ( IPC/JEDEC J-STD-020E Classification Reflow Profiles) Condition for 1 cycle Step1 : -55±2°C 30min Min.(Inductor) Step2 : 150±2°C transition time 1min MAX. Step3 : 150±2°C 30min Min. Step4 : low temp. transition time 1min MAX. Number of cycles : 1000 Measured at room temperature after placing for 24±2 hrs. t=24 hours/cycle. Note : Steps 7a & 7b Unpowered.															
Moisture Resistance (AEC-Q200)	Appearance : no damage. Inductance : within ± 10% of initial value. Q : shall not exceed the specification value. RDC : within ± 15% of initial value and shall not exceed the specification value.																
Biased Humidity (AEC-Q200)		Preconditioning : run through IR reflow for 3 times. ( IPC/JEDEC J-STD-020E Classification Reflow Profiles) Humidity : 85±3 %R.H. Temperature : 85°C±2°C Duration : 1000hrs Min. Measured at room temperature after placing for 24±2hrs.															
High Temperature Operational Life (AEC-Q200)		Preconditioning : run through IR reflow for 3 times. ( IPC/JEDEC J-STD-020E Classification Reflow Profiles) Temperature : 150±2°C (Inductor) Duration : 1000hrs Min. With 100% rated current. Measured at room temperature after placing for 24±2hrs.															
External Visual	Appearance : no damage.	Inspect device construction, marking and workmanship. Electrical Test not required.															
Physical Dimension	According to the product specification size measurement.	According to the product specification size measurement.															
Resistance to Solvents	Appearance : no damage.	Add aqueous wash chemical - OKEM clean or equivalent.															
Mechanical Shock	Appearance : no damage. Inductance : within ± 10% of initial value. Q : shall not exceed the specification value. RDC : within ± 15% of initial value and shall not exceed the specification value.	Preconditioning : run through IR reflow for 3 times. ( IPC/JEDEC J-STD-020E Classification Reflow Profiles) Test condition <table border="1" data-bbox="949 1948 1428 2072"> <thead> <tr> <th>Type</th> <th>Peak value (g's)</th> <th>Normal duration (D) (ms)</th> <th>Wave form</th> <th>Velocity change (Vi)ft/sec</th> </tr> </thead> <tbody> <tr> <td>SMD</td> <td>100</td> <td>6</td> <td>Half-sine</td> <td>12.3</td> </tr> <tr> <td>Lead</td> <td>100</td> <td>6</td> <td>Half-sine</td> <td>12.3</td> </tr> </tbody> </table> 3 shocks in each direction along 3 perpendicular axes(18 shocks).	Type	Peak value (g's)	Normal duration (D) (ms)	Wave form	Velocity change (Vi)ft/sec	SMD	100	6	Half-sine	12.3	Lead	100	6	Half-sine	12.3
Type	Peak value (g's)	Normal duration (D) (ms)	Wave form	Velocity change (Vi)ft/sec													
SMD	100	6	Half-sine	12.3													
Lead	100	6	Half-sine	12.3													

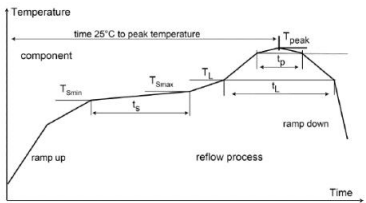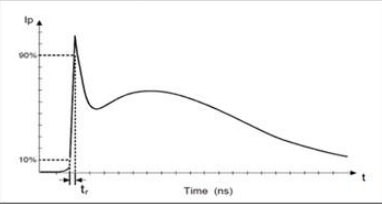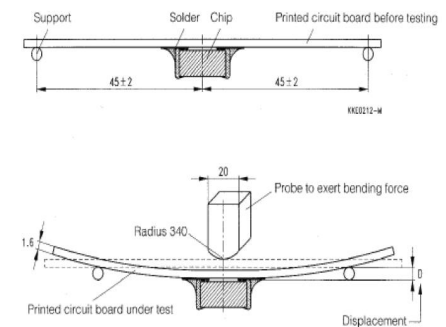Item	Performance	Test Condition																																																
Vibration		Preconditioning : run through IR reflow for 3 times. ( IPC/JEDEC J-STD-020E Classification Reflow Profiles) Oscillation Frequency : 10Hz~2KHz~10Hz for 20 minute Equipment : vibration checker Total Amplitude : 5g Testing Time : 12 hours(20 minutes, 12 cycles each of 3 orientations). Test condition : (MIL-STD-202 Condition B)																																																
Resistance to Soldering Heat	Appearance : no damage. Impedance : within $\pm 15\%$ of initial value Inductance : within $\pm 10\%$ of initial value Q : shall not exceed the specification value. RDC : within $\pm 15\%$ of initial value and shall not exceed the specification value.	<table border="1" data-bbox="970 376 1442 472"> <thead> <tr> <th>Temperature (° C)</th> <th>Time (s)</th> <th>Temperature ramp/immersion and emersion rate</th> <th>Number of heat cycles</th> </tr> </thead> <tbody> <tr> <td>260 <math>\pm</math> 5 (solder temp)</td> <td>10 <math>\pm</math> 1</td> <td>25mm/s <math>\pm</math> 6 mm/s</td> <td>1</td> </tr> </tbody> </table> Depth : completely cover the termination Continental  <table border="1" data-bbox="957 770 1442 949"> <thead> <tr> <th>Component Size</th> <th>Ramp up to 150°C</th> <th>T<sub>25°C</sub></th> <th>t<sub>25°C</sub></th> <th>T<sub>25°C to peak</sub></th> <th>T<sub>peak</sub></th> <th>t<sub>peak</sub></th> <th>T<sub>25°C</sub></th> <th>t<sub>25°C</sub></th> <th>Ramp down</th> </tr> </thead> <tbody> <tr> <td>Thickness &lt; 1.6mm or Thickness 1.6mm-2.5mm and Volume &lt; 350 mm<sup>3</sup></td> <td>3.0±0.1°C/s</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>≥290°C</td> <td>≥40s</td> <td>6.0±0.1°C/s</td> </tr> <tr> <td>Thickness 1.6mm-2.5mm and Volume 350-2000 mm<sup>3</sup> or Thickness &gt; 2.5mm and Volume &lt; 350 mm<sup>3</sup></td> <td>(The component shall be specified for usage in serial production with up to 3.0°C/s)</td> <td>≥190°C</td> <td>≥110s</td> <td>≥200°C</td> <td>≥217°C</td> <td>≥90s</td> <td>≥290°C</td> <td>≥300s</td> <td>6.0±0.1°C/s (The component shall be specified for usage in serial production with up to 6.0°C/s)</td> </tr> <tr> <td>Thickness 1.6mm-2.5mm and Volume &gt; 2000 mm<sup>3</sup> or Thickness &gt; 2.5mm and Volume &gt; 350 mm<sup>3</sup></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>≥245°C</td> <td></td> <td></td> </tr> </tbody> </table> Table 1: Minimum requirements for lead-free soldering *peak temperature is measured on the centre top of the component package ** t <sub>p</sub> measured @ T <sub>peak</sub> -5°C	Temperature (° C)	Time (s)	Temperature ramp/immersion and emersion rate	Number of heat cycles	260 $\pm$ 5 (solder temp)	10 $\pm$ 1	25mm/s $\pm$ 6 mm/s	1	Component Size	Ramp up to 150°C	T <sub>25°C</sub>	t <sub>25°C</sub>	T <sub>25°C to peak</sub>	T <sub>peak</sub>	t <sub>peak</sub>	T <sub>25°C</sub>	t <sub>25°C</sub>	Ramp down	Thickness < 1.6mm or Thickness 1.6mm-2.5mm and Volume < 350 mm <sup>3</sup>	3.0±0.1°C/s						≥290°C	≥40s	6.0±0.1°C/s	Thickness 1.6mm-2.5mm and Volume 350-2000 mm <sup>3</sup> or Thickness > 2.5mm and Volume < 350 mm <sup>3</sup>	(The component shall be specified for usage in serial production with up to 3.0°C/s)	≥190°C	≥110s	≥200°C	≥217°C	≥90s	≥290°C	≥300s	6.0±0.1°C/s (The component shall be specified for usage in serial production with up to 6.0°C/s)	Thickness 1.6mm-2.5mm and Volume > 2000 mm <sup>3</sup> or Thickness > 2.5mm and Volume > 350 mm <sup>3</sup>							≥245°C		
Temperature (° C)	Time (s)	Temperature ramp/immersion and emersion rate	Number of heat cycles																																															
260 $\pm$ 5 (solder temp)	10 $\pm$ 1	25mm/s $\pm$ 6 mm/s	1																																															
Component Size	Ramp up to 150°C	T <sub>25°C</sub>	t <sub>25°C</sub>	T <sub>25°C to peak</sub>	T <sub>peak</sub>	t <sub>peak</sub>	T <sub>25°C</sub>	t <sub>25°C</sub>	Ramp down																																									
Thickness < 1.6mm or Thickness 1.6mm-2.5mm and Volume < 350 mm <sup>3</sup>	3.0±0.1°C/s						≥290°C	≥40s	6.0±0.1°C/s																																									
Thickness 1.6mm-2.5mm and Volume 350-2000 mm <sup>3</sup> or Thickness > 2.5mm and Volume < 350 mm <sup>3</sup>	(The component shall be specified for usage in serial production with up to 3.0°C/s)	≥190°C	≥110s	≥200°C	≥217°C	≥90s	≥290°C	≥300s	6.0±0.1°C/s (The component shall be specified for usage in serial production with up to 6.0°C/s)																																									
Thickness 1.6mm-2.5mm and Volume > 2000 mm <sup>3</sup> or Thickness > 2.5mm and Volume > 350 mm <sup>3</sup>							≥245°C																																											
Thermal shock (AEC-Q200)		Preconditioning : run through IR reflow for 3 times. ( IPC/JEDEC J-STD-020DClassification Reflow Profiles) Condition for 1 cycle Step1 : -55 $\pm$ 2°C 15 $\pm$ 1min(Inductor) Step2 : 150 $\pm$ 2°C within 20Sec. Step3 : 150 $\pm$ 2°C 15 $\pm$ 1min. Number of cycles : 300 Measured at room fempraturc after placing fo24 $\pm$ 2hrs.																																																
ESD	Appearance : no damage.	 Direct Contact and Air Discharge PASSIVE COMPONENT HBM ESD Discharge Waveform to a Coaxial Target Test method : AEC-Q200-002 Test mode : Contact Discharge Discharge level : 4 KV (Level : 2 )																																																
Solderability	More than 95% of the terminal electrode should be covered with solder.	a. Method B1, 4 hrs @155°C dry heat @255°C $\pm$ 5°C Test time : 5 +0/-0.5 seconds. b. Method D category 3. (steam aging 8hours $\pm$ 15 min)@ 260°C $\pm$ 5°C Test time : 30 +0/-0.5 seconds.																																																
Electrical Characterization	Refer Specification for Approval.	Summary to show Min, Max, Mean and Standard deviation .																																																
Flammability	Electrical Test not required.	V-0 or V-1 are acceptable.																																																
Board Flex	Appearance : no damage.	Preconditioning : run through IR reflow for 3 times. ( IPC/JEDEC J-STD-020E Classification Reflow Profiles) Place the 100mm X 40mm board into a fixture similar to the one shown in below Figure with the component facing down. The apparatus shall consist of mechanical means to apply a force which will bend the board (D) x = 2 mm minimum. The duration of the applied forces shall be 60 (+ 5) sec. The force is to be applied only once to the board. 																																																

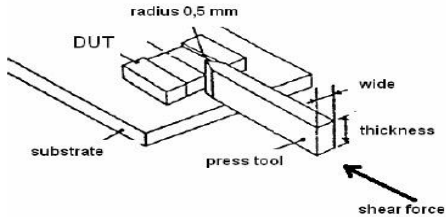Terminal Strength(SMD)	Appearance : no damage.	<p>Preconditioning : run through IR reflow for 3 times. ( IPC/JEDEC J-STD-020E Classification Reflow Profiles) With the component mounted on a PCB with the device to be tested, apply a 17.7 N (1.8 Kg) force to the side of a device being tested. This force shall be applied for 60 +1 seconds. Also the force shall be applied gradually as not to apply a shock to the component being tested.</p>  <p>The diagram illustrates the shear force test setup. It shows a DUT (Device Under Test) mounted on a substrate. A press tool is used to apply a shear force to the component. The diagram labels the radius of the press tool tip as 0.5 mm, and the width and thickness of the component. An arrow indicates the direction of the shear force.</p>
------------------------	-------------------------	---

Note : When there are questions concerning measurement result : measurement shall be made after  $48 \pm 2$  hours of recovery under the standard condition.



## 9. Soldering Specifications

### (1) Soldering

Mildly activated rosin fluxes are preferred. TAI-TECH terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

### (2) Soldering Reflow:

Recommended temperature profiles for lead free re-flow soldering in Figure 1. Table 1.1&1.2 (J-STD-020E)

### (3) Iron Reflow:

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.(Fig. 2)

- Preheat circuit and products to 150°C
- Never contact the ceramic with the iron tip
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- 280°C tip temperature (max)
- 1.0mm tip diameter (max)
- Limit soldering time to 3sec.

Fig.1 Soldering Reflow

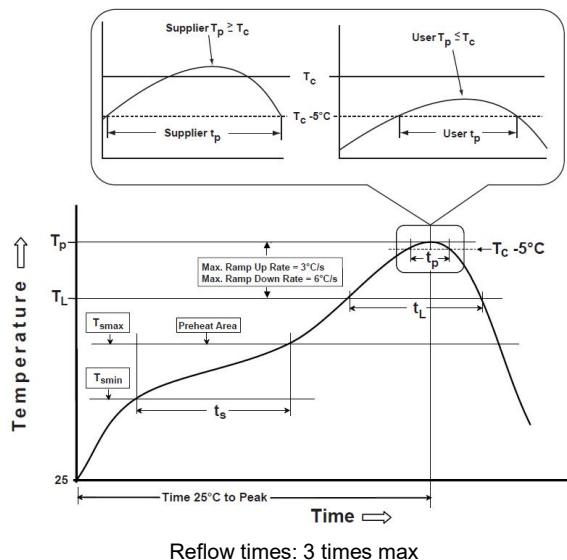


Fig.2 Iron soldering temperature profiles

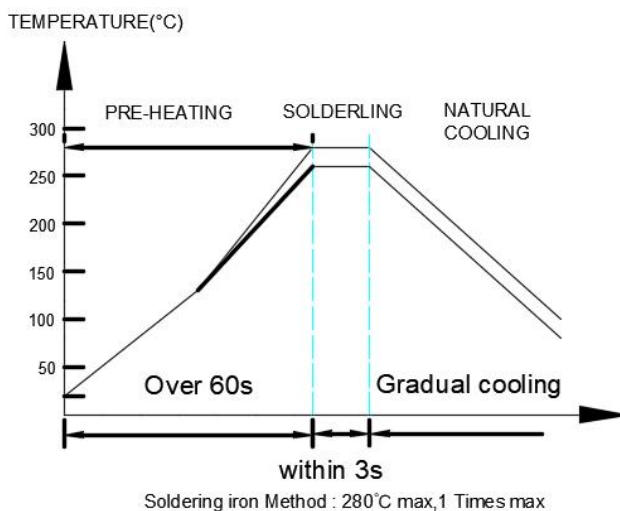


Table (1.1): Reflow Profiles

Profile Type:	Pb-Free Assembly
Preheat	
-Temperature Min( $T_{smin}$ )	150°C
-Temperature Max( $T_{smax}$ )	200°C
-Time( $t_s$ )from( $T_{smin}$ to $T_{smax}$ )	60-120seconds
Ramp-up rate( $T_L$ to $T_p$ )	3°C/second max.
Liquidus temperature( $T_L$ )	217°C
Time( $t_L$ )maintained above $T_L$	60-150 seconds
Classification temperature( $T_c$ )	See Table (1.2)
Time( $t_p$ ) at $T_c - 5^\circ C$ ( $T_p$ should be equal to or less than $T_c$ .)	* < 30 seconds
Ramp-down rate( $T_p$ to $T_L$ )	6°C /second max.
Time 25°C to peak temperature	8 minutes max.

$T_p$ : maximum peak package body temperature,  $T_c$ : the classification temperature.

For user (customer)  $T_p$  should be equal to or less than  $T_c$ .

\* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum.

Table (1.2) Package Thickness/Volume and Classification Temperature ( $T_c$ )

	Package Thickness	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> 350-2000	Volume mm <sup>3</sup> >2000
PB-Free Assembly	<1.6mm	260°C	260°C	260°C
	1.6-2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

Reflow is referred to standard IPC/JEDEC J-STD-020E.

## 10. Notes

- (1) When there are questions concerning measurement result : measurement shall be made after  $48 \pm 2$  hours of recovery under the standard condition.
- (2) This power choke coil itself does not have any protective function in abnormal condition such as overload, short-circuit and open-circuit conditions, etc. Therefore, it shall be confirmed as the end product that there is no risk of smoking, fire, dielectric withstand voltage, insulation resistance, etc. in abnormal conditions to provide protective devices and/or protection circuit in the end product.
- (3) When this power choke coil was used in a similar or new product to the original one, sometimes it might not be able to satisfy the specifications due to different condition of use.
- (4) Dielectric withstanding test with higher voltage than specific value will damage insulating material and shorten its life.
- (5) This power choke coil must not be used in wet condition by water, coffee or any liquid because insulation strength becomes very low in this condition.
- (6) Please consult our company to confirm the reliability of the process required to wash or use or exposure to a chemical solvent used in this product. PCB washing tested to MIL-STD-202 Method, and dry it off immediately.
- (7) The rated current as listed is either the saturation current or the heating current depending on which value is lower.
- (8) If this power choke is dipped in the cleaning agent, such as toluene, xylene, ketone, and ether system, there is a possibility that the performance decreases greatly, and marking disappears.
- (9) The high power ultrasonic washing may damage the choke body.
- (10) Before use, the user should determine whether this product is suitable for their own design, our company only guarantees that the product meets the requirements of this specification.

### **Application Notice**

#### · Storage Conditions


To maintain the solderability of terminal electrodes:

1. TAI-TECH products meet IPC/JEDEC J-STD-020E standard-MSL, level 1.
2. Temperature and humidity conditions: Less than 40°C and 60% RH.
3. Recommended products should be used within 12 months from the time of delivery.
4. The packaging material should be kept where no chlorine or sulfur exists in the air.

#### · Transportation

1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
3. Bulk handling should ensure that abrasion and mechanical shock are minimized.

### 11. Typical Performance Curves

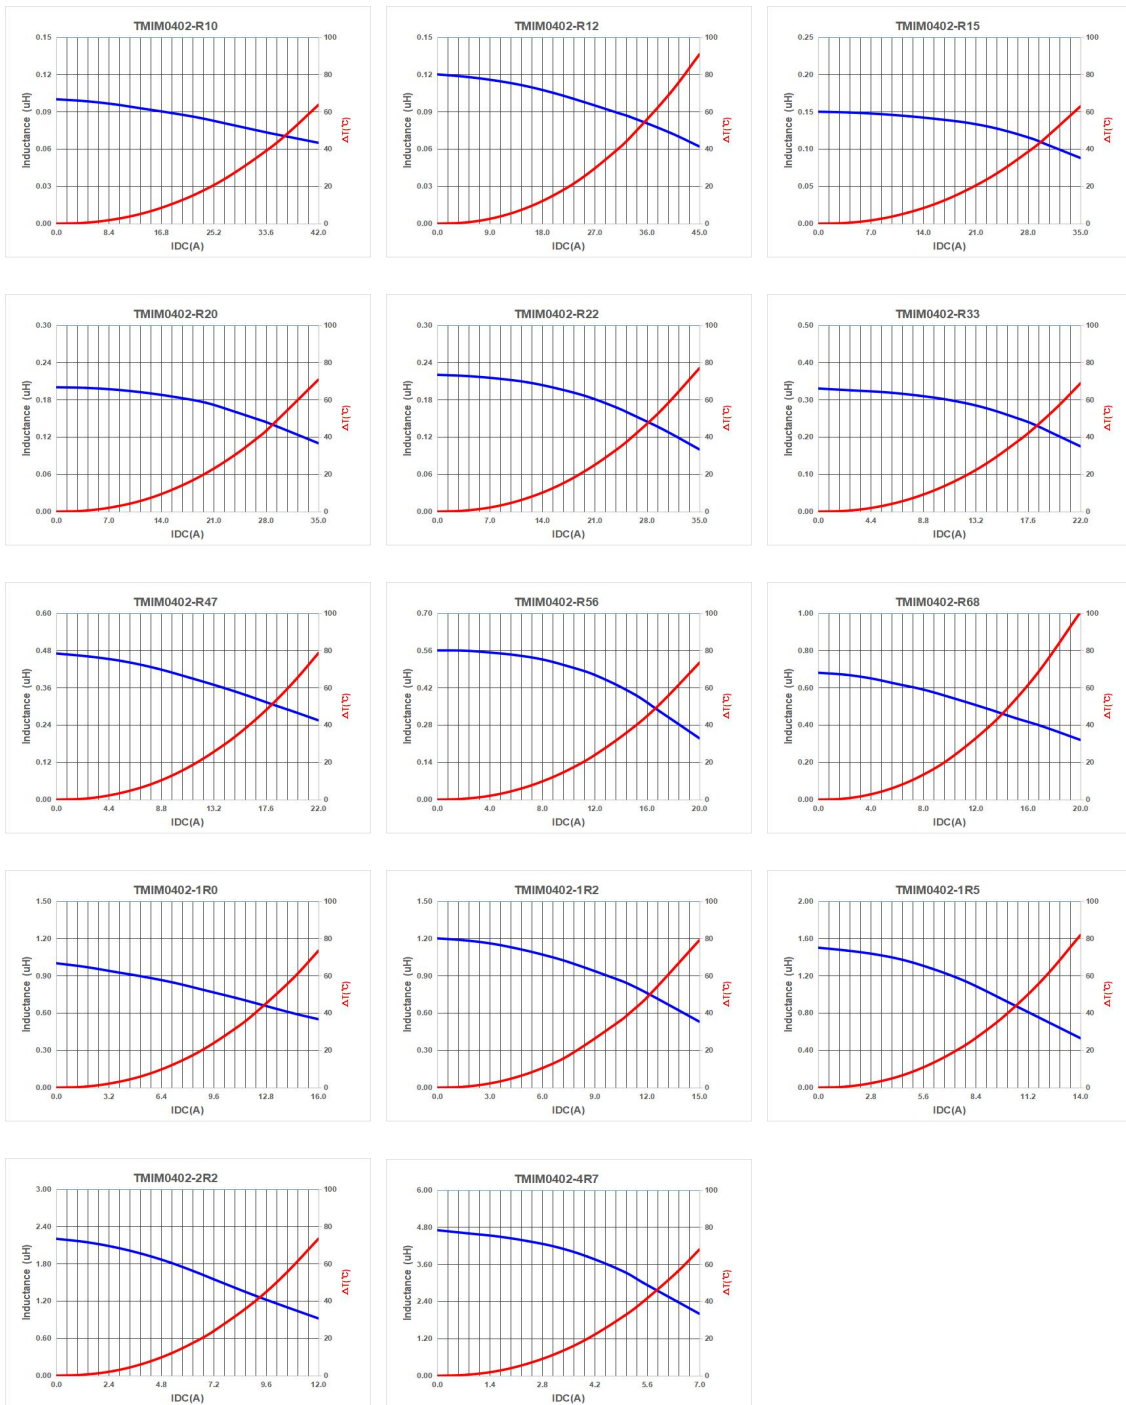

单击下面可查看定价，库存，交付和生命周期等信息

[>>TAI-TECH\(台庆\)](#)