

Bridge Rectifiers


Voltage - 50 to 1000 V
Forward Current

FEATURES

- Suitable for printed circuit board or chassis mounting
- Compact construction
- High surge current capability
- Solder dip 275 °C max. 7s, per JESD 22-B106

MECHANICAL DATA

- Package: **KBPC-A**
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Polarity: As marked on body

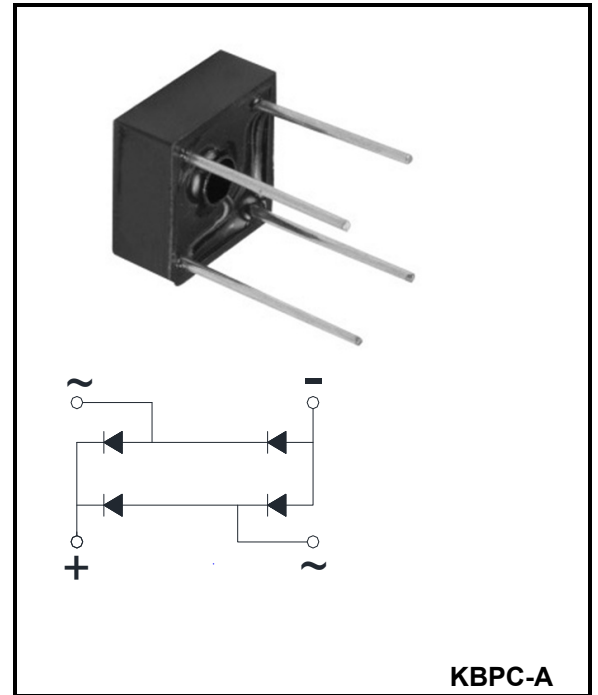

KBPC-A

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

PARAMETER	SYMBOL	KBPC15005	KBPC1501	KBPC1502	KBPC1504	KBPC1506	KBPC1508	KBPC1510	Units
Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Average Rectified Output Current @60Hz sine wave, R-load, $T_a=40^{\circ}C$	I_o	15							A
Surge(Non-repetitive)Forward Current @60Hz Half- sine Wave, 1 cycle, $T_a=25^{\circ}C$	I_{FSM}	220							A
Current Squared Time @1ms≤t≤8.3ms $T_j=25^{\circ}C$, Rating of per diode	I_{t^2}	200							A ² S
Storage Temperature	T_{stg}	-55 ~+150							°C
Junction Temperature	T_j	-55 ~+150							°C
Maximum instantaneous forward voltage drop per diode $I_{FM}=7.5A$	V_{FM}	1.1							V
Maximum DC reverse current at rated DC blocking voltage per diode $V_{RM}=V_{RRM}$	I_{RRM}	10							μA
Thermal Resistance Between junction and ambient	$R_{\theta JA}$	17							°C/W

Ratings And Characteristic Curves

FIG1:Io-Tc Curve

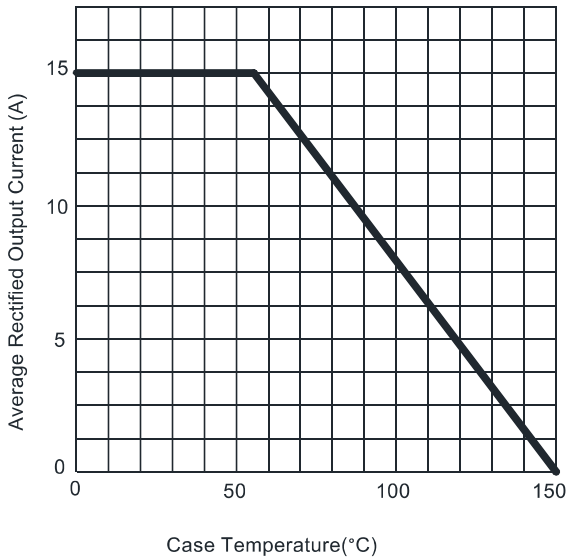


FIG2:Surge Forward Current Capability

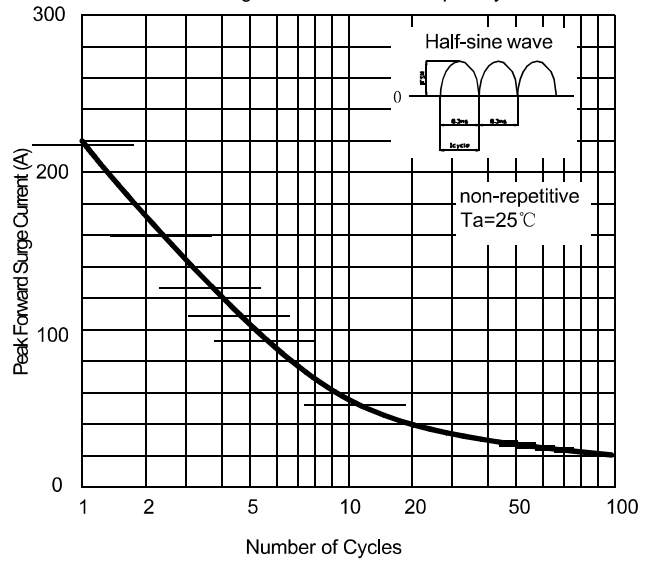


FIG3:Instantaneous Forward Voltage



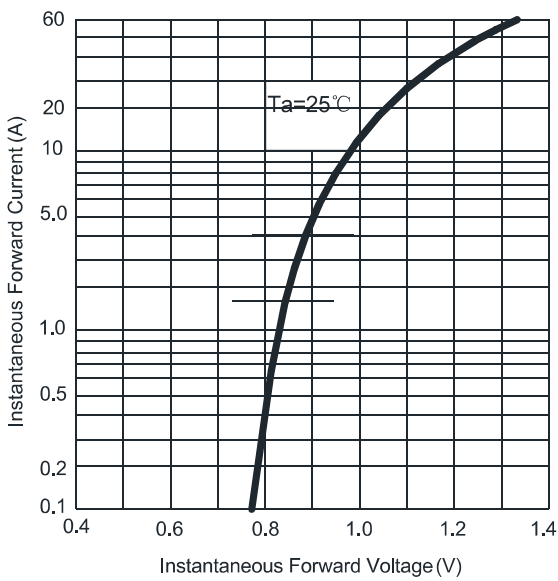


FIG4:Typical Reverse Characteristics

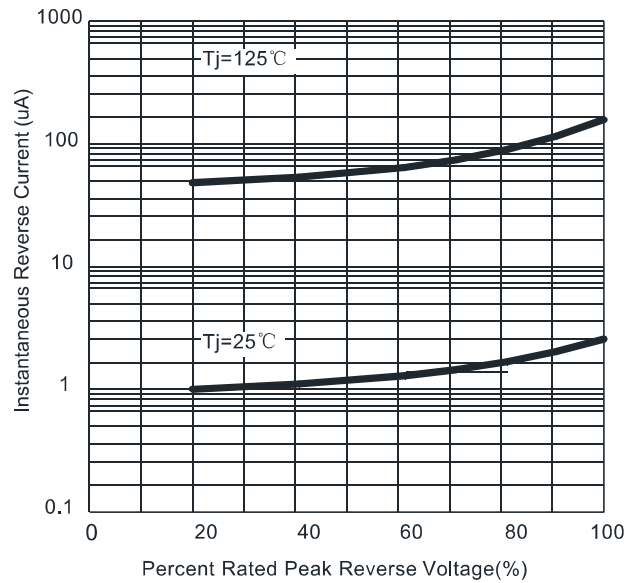

Marking Diagram

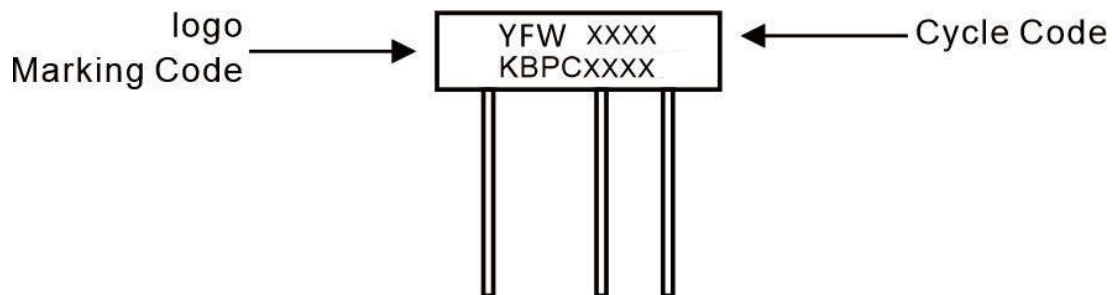

Ordering information

Package	Packing Description	Packing Quantity
KBPC-A	bulk	200PCS/Box 2000PCS/Carton

Package Dimensions

KBPC-A

Dim.	Millimeter(mm)		Dimensions inInch	
	Min.	Max.	Min.	Max.
A	18.50	19.50	0.73	0.77
B	12.30	13.30	0.48	0.52
C	0.99	1.59	0.04	0.06
D	3.50	4.10	0.14	0.16
E	9.00	/	0.35	/
F	6.50	7.50	0.26	0.30

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.

单击下面可查看定价，库存，交付和生命周期等信息

[>>YFW\(佑风微\)](#)