


CJAB35P03 P-Channel Power MOSFET

V_{(BR)DSS}	R_{DS(on)MAX}	I_D
-30V	15mΩ@-10V	-35A

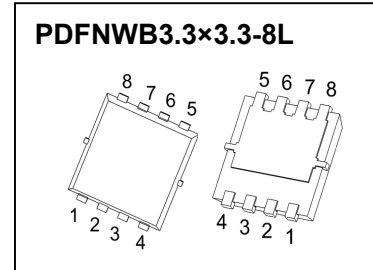

DESCRIPTION

The CJAB35P03 uses advanced trench technology and design to provide excellent R_{DS(ON)} with low gate charge. It can be used in a wide variety of applications


FEATURES

- High density cell design for ultra low R_{DS(ON)}
- Fully characterized avalanche voltage and current
- Good stability and uniformity with high E_{AS}
- Excellent package for good heat dissipation
- Special process technology for high ESD capability

APPLICATIONS


- Battery and loading switching

MARKING



CJAB35P03 = Part No.
 Solid dot=Pin1 indicator
 XX=Date Code

EQUIVALENT CIRCUIT



MAXIMUM RATINGS (T_a=25°C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V _{DS}	-30	V
Gate-Source Voltage	V _{GS}	±20	V
Continuous Drain Current	I _D ⁽¹⁾	-35	A
Pulsed Drain Current	I _{DM}	-140	A
Single Pulsed Avalanche Energy	E _{AS} ⁽¹⁾	240	mJ
Power Dissipation	P _D	3	W
Thermal Resistance from Junction to Ambient	R _{θJA} ⁽²⁾	41.67	°C/W
Junction Temperature	T _J	150	°C
Storage Temperature Range	T _{stg}	-55 ~+150	°C
Lead Temperature for Soldering Purposes(1/8" from case for 10s)	T _L	260	°C

(1).EAS condition: VDD=15V,L=0.1mH, RG=25Ω, Starting T_J = 25°C

(2).Mounted on a glass epoxy board of 25.4 mm x 25.4 mm x 0.8 mmt

MOSFET ELECTRICAL CHARACTERISTICS

$T_a=25^\circ\text{C}$ unless otherwise specified


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Off characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = -250\mu A$	-30			V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = -24V, V_{GS} = 0V$			-1	μA
Gate-body leakage current	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 20V$			± 100	nA
On characteristics (note1)						
Gate-threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu A$	-1.0	-1.6	-2.5	V
Static drain-source on-state resistance	$R_{DS(on)}$	$V_{GS} = -10V, I_D = -12A$		9	15	$m\Omega$
		$V_{GS} = -4.5V, I_D = -12A$		14	25	$m\Omega$
Forward transconductance	g_{fs}	$V_{DS} = -10V, I_D = -12A$		22		S
Dynamic characteristics (note 2)						
Input capacitance	C_{iss}	$V_{DS} = -15V, V_{GS} = 0V,$ $f = 1MHz$		2280		μF
Output capacitance	C_{oss}			385		
Reverse transfer capacitance	C_{rss}			278		
Switching characteristics (note 2)						
Total gate charge	Q_g	$V_{DS} = -15V, I_D = -12A,$ $V_{GS} = -10V$		38		nC
Gate-source charge	Q_{gs}			7		
Gate-drain charge	Q_{gd}			9		
Turn-on delay time	$t_{d(on)}$	$V_{DD} = -15V, I_D = -1A, R_L = 15\Omega$ $V_{GS} = -10V, R_G = 2.5\Omega$		10		ns
Turn-on rise time	t_r			22		
Turn-off delay time	$t_{d(off)}$			36		
Turn-off fall time	t_f			9		
Drain-Source Diode Characteristics						
Drain-source diode forward voltage(note1)	V_{SD}	$V_{GS} = 0V, I_S = -12A$		-0.8	-1.2	V
Continuous drain-source diode forward current(note3)	I_S				-35	A
Pulsed drain-source diode forward current	I_{SM}				-140	A

Notes:


1. Pulse Test : Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$.
2. Guaranteed by design, not subject to production.
3. Surface Mounted on FR4 Board, $t \leq 10$ sec.

Typical Characteristics


Output Characteristics

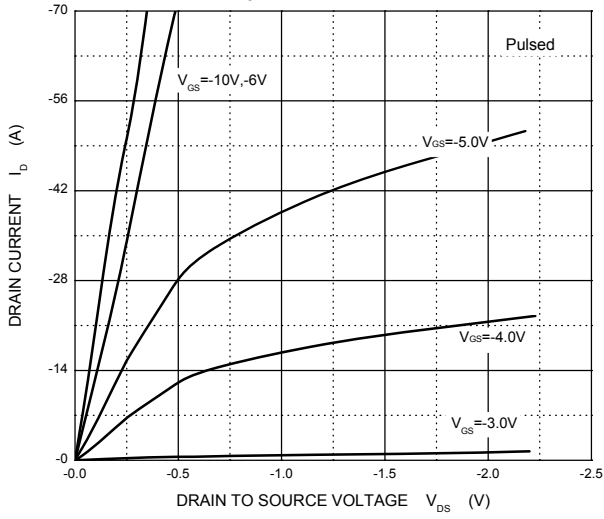


Transfer Characteristics

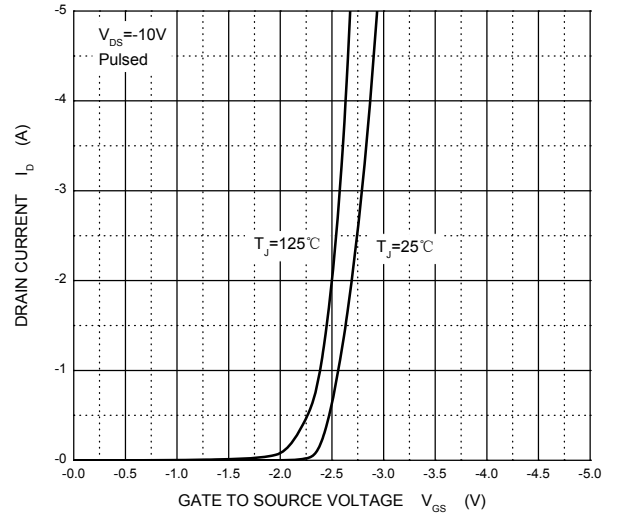


$R_{DS(ON)}$ — I_D

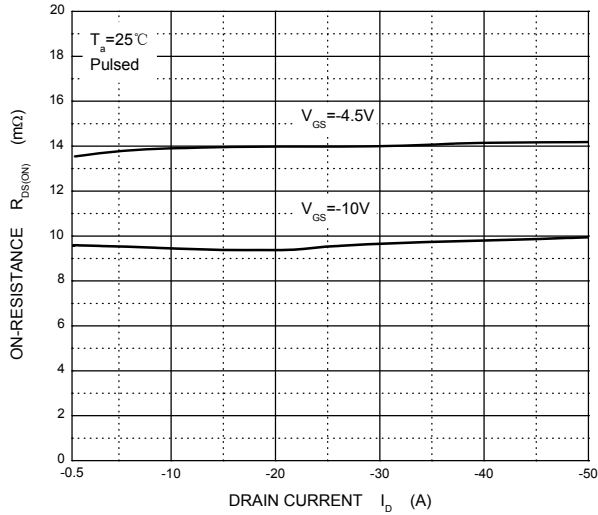


$R_{DS(ON)}$ — V_{GS}

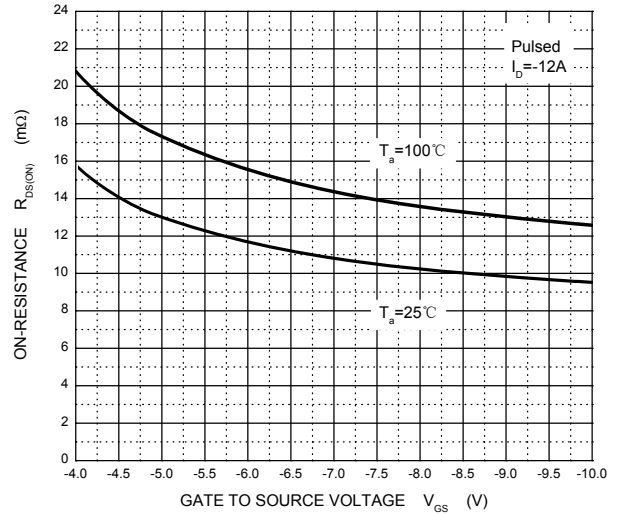


I_S — V_{SD}

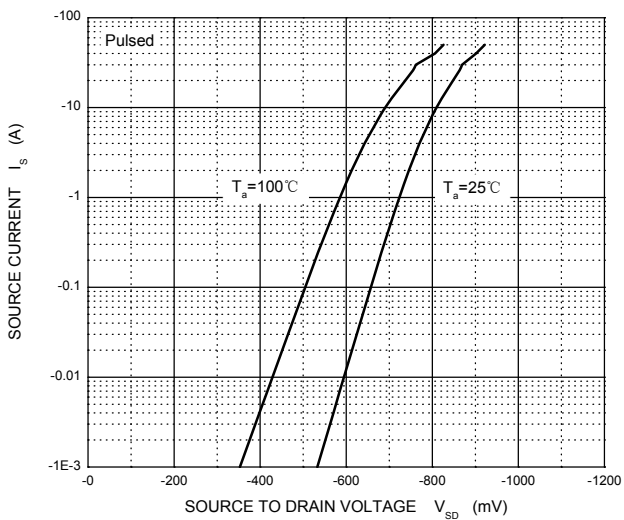

Threshold Voltage

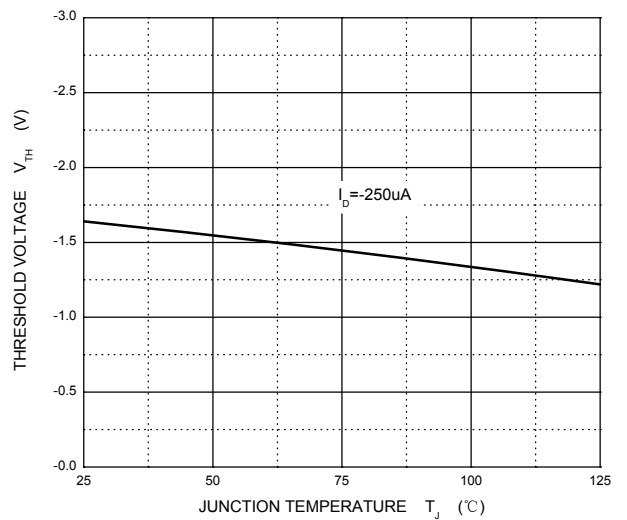


PDFNWB3.3x3.3-8L Package Outline Dimensions

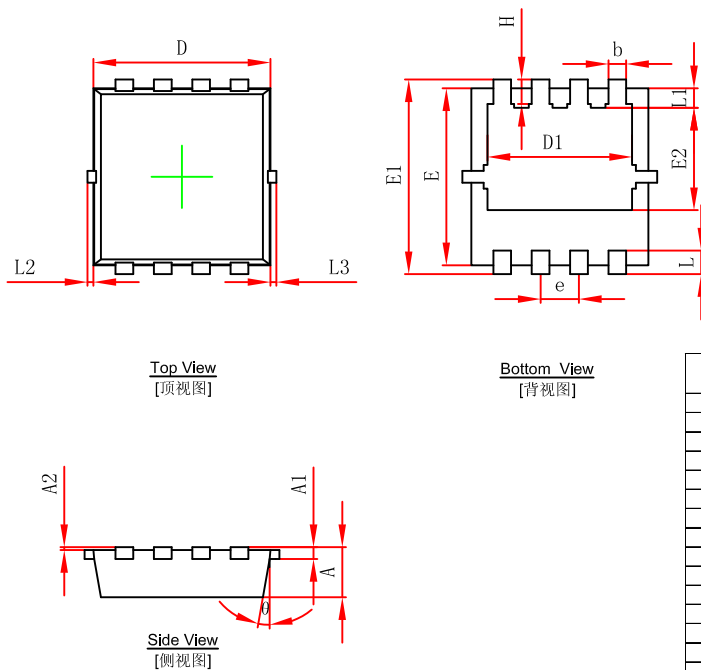

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.650	0.850	0.026	0.033
A1	0.152 REF.		0.006 REF.	
A2	0-0.05		0-0.002	
D	2.900	3.100	0.114	0.122
D1	2.300	2.600	0.091	0.102
E	2.900	3.100	0.114	0.122
E1	3.150	3.450	0.124	0.136
E2	1.535	1.935	0.060	0.076
b	0.200	0.400	0.008	0.016
e	0.550	0.750	0.022	0.030
L	0.300	0.500	0.012	0.020
L1	0.180	0.480	0.007	0.019
L2	0-0.100		0-0.004	
L3	0-0.100		0-0.004	
H	0.315	0.515	0.012	0.020
θ	9°	13°	9°	13°

PDFNWB3.3x3.3-8L Suggested Pad Layout

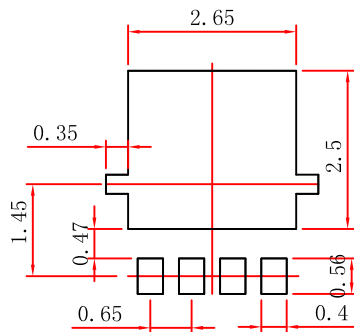

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

单击下面可查看定价，库存，交付和生命周期等信息

[>>JCET\(长电科技\)](#)