

**SEA&LAND ELECTRONIC CORP.**

13F., No.120-10,  
 Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,  
 Taiwan  
 Tel.: 886-2-8221-2567  
 Fax.: 886-2-2225-7268

**Techfuse**  
**PTC Devices**  
 Resettable Fuse

PRODUCT: nSMD110  
 DOCUMENT: QR0429  
 ECN. NO.:  
 REV LETTER:  
 REV DATE: 2014/9/25  
 PAGE NO.: 1 of 1

# Specification Sheet

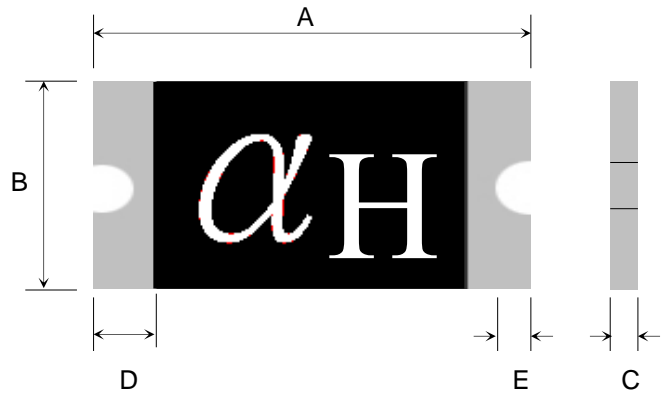
Terminal Pad Solderability:  
 Meets EIA Specification RS186-9E  
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:  
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

**Marking:**

Part Identification  
 nSMD110 =  $\alpha$ H

**TABLE I. DIMENSIONS:**

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
nSMD110	$\alpha$ H	3.00	3.50	1.50	1.80	0.40	0.80	0.15	0.10

Unit:mm

**TABLE II. PERFORMANCE RATINGS:**

Model	Marking	$V_{max}$ (Vdc)	$I_{max}$ (A)	$I_{hold}$ @25°C (A)	$I_{trip}$ @25°C (A)	$P_d$ Max. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	$R_{i_{min}}$ ( $\Omega$ )	$R_{1_{max}}$ ( $\Omega$ )
nSMD110	$\alpha$ H	6.0	100	1.10	2.20	0.6	8.0	0.30	0.050	0.250

**Order Information****Packaging**

SMD1206	110	Tape & Reel Quantity
Product name	Hold	Max
Size 3216 mm / 1206 mils	Current	voltage
SMD: surface mount device	1.10A	5000 pcs/reel

Recognitic UL Approved.

E201504/E319079



单击下面可查看定价，库存，交付和生命周期等信息

[>>SEA-LAND\(台湾陆海\)](#)