
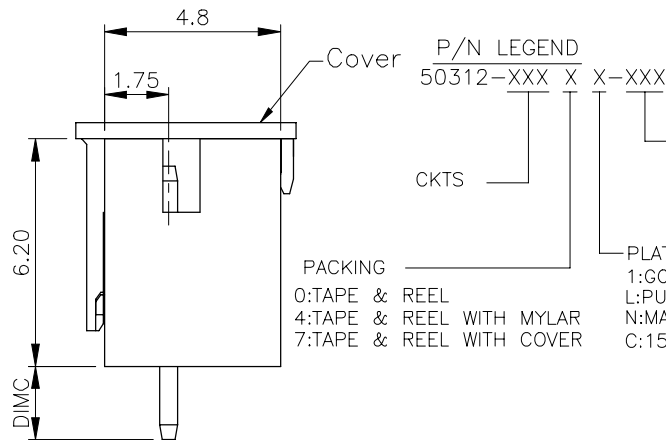


- NOTES:
- MATERIAL:
    - HOUSING: HALOGEN FREE PLASTIC, HIGH TEMP., UL94V-0;
    - CONTACT: COPPER ALLOY
    - FITTING NAIL: COPPER ALLOY
  - FINISH:
    - CONTACT:
      - 50~100u" NICKEL UNDERPLATING OVERALL.
      - 1:GOLD FLASH PLATING
      - N: 100~200u" MATT TIN PLATING
      - L: 100~200u" PURE TIN PLATING
      - C:15u" GOLD ON CONTACT FOR LEAD FREE.
      - CONTACT POINT: GOLD15u"MIN
      - SOLDER TAIL: GOLD 1u" MIN
    - FITTING NAIL:
      - 50~100u" NICKEL UNDERPLATING OVERALL.
      - 1:GOLD FLASH PLATING
      - N: 100~200u" MATT TIN PLATING
      - L: 100~200u" PURE TIN PLATING
  - REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
  - SPEC. PLS. REFER TO PS-50305-XXXX-XXX
  - PACKAGE PLS. REFER TO 88323-XXXX-TRP/88323-XXXX3-TRP

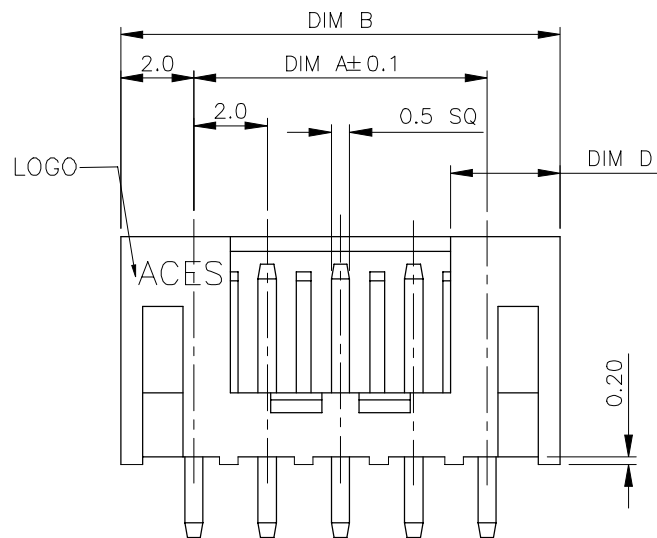

P/N LEGEND  
50312-XXX X X-XXX



CKTS

PLATING  
1:GOLD FLASH  
L:PURE TIN LEAD FREE  
N:MATT TIN LEAD FREE  
C:15u" GOLD ON CONTACT FOR LEAD FREE.

PACKING  
0:TAPE & REEL  
4:TAPE & REEL WITH MYLAR  
7:TAPE & REEL WITH COVER

Others	Housing color	HALOGEN FREE	DIM C
001	BLACK	<b>HF</b>	2.0
002	BLACK	<b>HF</b>	2.4
003	BLACK	<b>HF</b>	3.0
004	WHITE	<b>HF</b>	3.0

CKT	Dim A	Dim B	DIM D
2	2.0	6.0	2.50
3	4.0	8.0	
4	6.0	10.0	
5	8.0	12.0	
6	10.0	14.0	
7	12.0	16.0	
8	14.0	18.0	
9	16.0	20.0	
10	18.0	22.0	
11	20.0	24.0	
12	22.0	26.0	
13	24.0	28.0	
14	26.0	30.0	
15	28.0	32.0	
16	30.0	34.0	
17	32.0	36.0	
18	34.0	38.0	
19	36.0	40.0	
20	38.0	42.0	

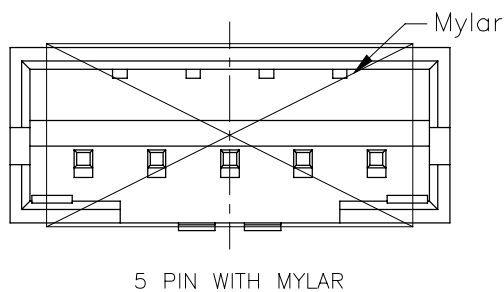

CKT	DIM D
2	2.50
OTHER	3.00

<b>QUALITY SYMBOLS</b> MAJOR Ⓢ CRITICAL Ⓢ GENERAL TOLERANCES (UNLESS SPECIFIED) X ±0.5 .X ±0.25 .XX ±0.15 .XXX ±0.1 ANGLES ±2°	DRAWN BY Huang,ShunSen CHECKED BY Lu, Jing Quan APPROVED BY hsieh, fu yu	DATE 20/04/22 DATE 20/04/22 DATE 20/04/22	
	TITLE 2.0mm WTB HEADER T/H S/T S/R TYPE		
UNITS mm SCALE 5:1		SIZE A4 REV G	DWG NO. 50312-XXXX-XXX

单击下面可查看定价，库存，交付和生命周期等信息

[>>ACES\(宏致\)](#)