

COSMO High Voltage, Solid State Relay-MOSFET Output KAQW212/212A

UL 1577/ UL 508 (File No.E108430), FI EN60950 (File No.FI13698)




Features

1. Normally Open, Single Pole Single Throw
2. Control 60V AC or DC Voltage
3. Switch 400mA Loads
4. LED control Current, 5mA
5. Low ON-Resistance
6. dv/dt , >500V/ms
7. Isolation Test Voltage, 3750VACrms

Absolute Maximum Ratings

($T_a=25^\circ\text{C}$)

Emitter (Input)	Detector (Output)
Reverse Voltage.....5.0V	Output Breakdown Voltage±60V
Continuous Forward Current50mA	Continuous Load Current±400mA
Peak Forward Current1A	Power Dissipation500mW
Power Dissipation100mW	
Derate Linearly from 25°C1.3mW/°C	
General Characteristics	
Isolation Test Voltage3750VACrms	Storage Temperature Range ...-40°C to +125°C
Isolation Resistance	Operating Temperature Range ...-30°C to +85°C
$V_{io}=500V, T_a=25^\circ\text{C}$ $\geq 10^{10}\Omega$	Junction Temperature.....100°C
Total Power Dissipation550mW	Soldering Temperature,
Derate Linearly from 25°C2.5mW/°C	2mm from case, 10 sec260°C

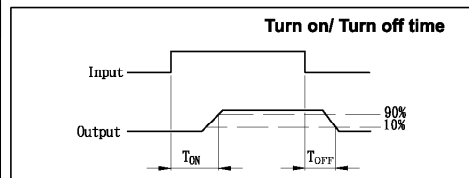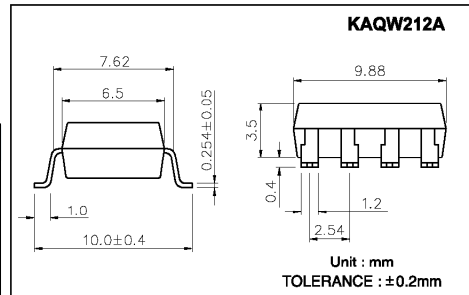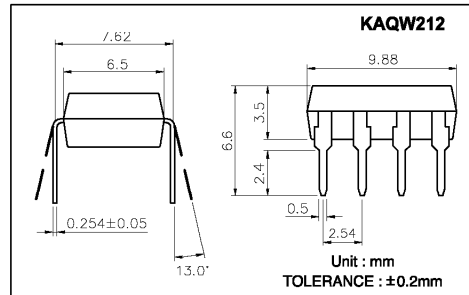

Electro-optical Characteristics


($T_a=25^\circ\text{C}$)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Emitter (Input)						
Forward Voltage	V_F	$I_F=10\text{mA}$		1.2	1.5	V
Operation Input Current	I_{FON}	$V_L=\pm 20V, I_L=100\text{mA}, t=10\text{ms}$			5	mA
Recovery Input Current	I_{FOFF}	$V_L=\pm 20V, I_L\leq 5\mu\text{A}$	0.2			mA
Detector (Output)						
Output Breakdown Voltage	V_B	$I_B=50\mu\text{A}$	60			V
Output Off-State Leakage	I_{TOFF}	$V_T=60V, I_F=0\text{mA}$		0.2	1	μA
I/O Capacitance	C_{ISO}	$I_F=0, f=1\text{MHz}$		6		pF
ON Resistance	R_{ON}	$I_L=100\text{mA}, I_F=10\text{mA}$		0.83	2.50	Ω
Turn-On Time	T_{ON}	$I_F=10\text{mA}, V_L=\pm 20V$		0.2	1.5	ms
Turn-Off Time	T_{OFF}	$t=10\text{ms}, I_L=\pm 100\text{mA}$		0.3	1.5	ms

Schematic and Wiring Diagrams

Type	Schematic	Output configuration	Load	Connection	Wiring Diagrams
KAQW212 & KAQW212A		2a	AC/DC	-	<p>(1) Two independent 1 Form A use</p> <p>(2) 2 Form A use</p>

Data Curve

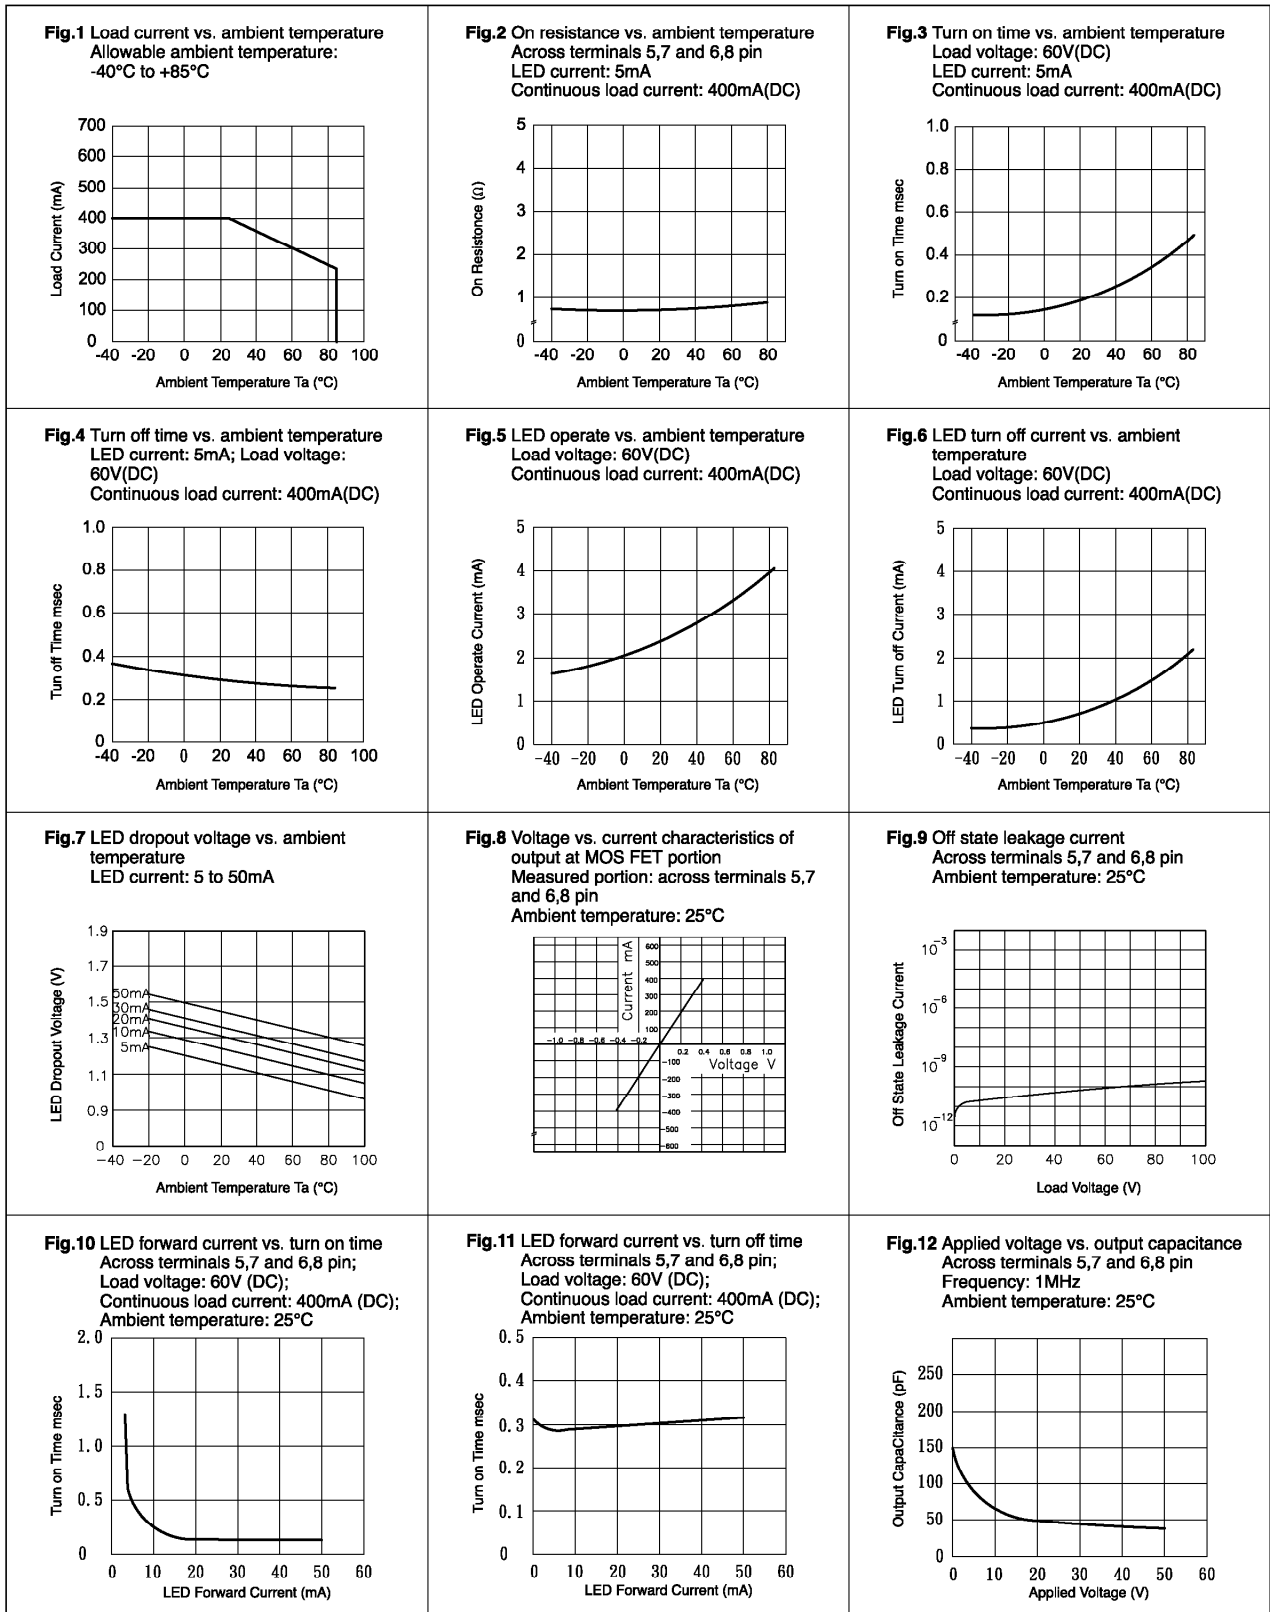

单击下面可查看定价，库存，交付和生命周期等信息

[>>Cosmo](#)