


#### VHF TUNER BAND SWITCH APPLICATIONS.

#### FEATURES

- Small Package.
- Small Total Capacitance :  $C_T=1.2\text{pF}(\text{Max.})$ .
- Low Series Resistance :  $r_s=0.5$  (Typ.).
- Suffix U : Qualified to AEC-Q101.  
ex) KDS114E-RTK/HU

#### MAXIMUM RATING (Ta=25 )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Reverse Voltage	$V_R$	35	V
Forward Current	$I_F$	100	mA
Power Dissipation	$P_D$	100	mW
Junction Temperature	$T_j$	150	
Storage Temperature Range	$T_{stg}$	-55 150	

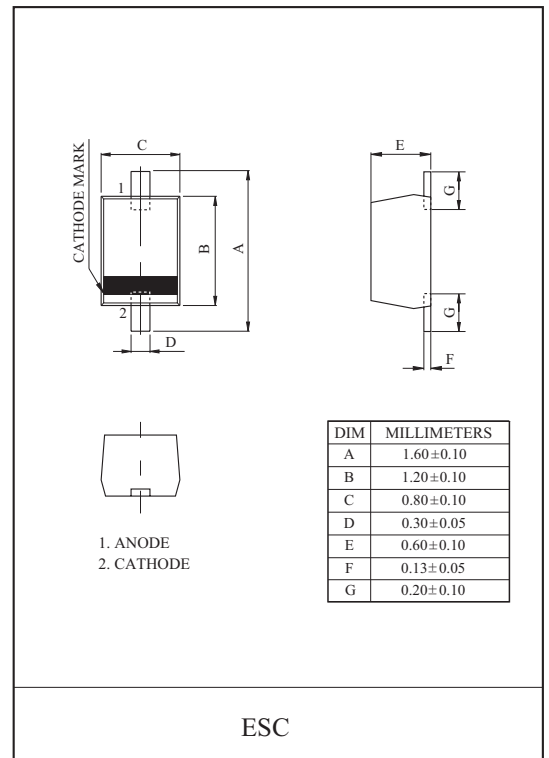

#### MARKING




#### ELECTRICAL CHARACTERISTICS (Ta=25 )


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Forward Voltage	$V_F$	$I_F=2\text{mA}$	-	-	0.85	V
Reverse Current	$I_R$	$V_R=15\text{V}$	-	-	0.1	$\mu\text{A}$
Reverse Voltage	$V_R$	$I_R=1\ \mu\text{A}$	35	-	-	V
Total Capacitance	$C_T$	$V_R=6\text{V}, f=1\text{MHz}$	-	0.7	1.2	pF
Series Resistance	$r_s$	$I_F=2\text{mA}, f=100\text{MHz}$	-	0.5	0.9	

# KDS114E


$r_S - I_F$

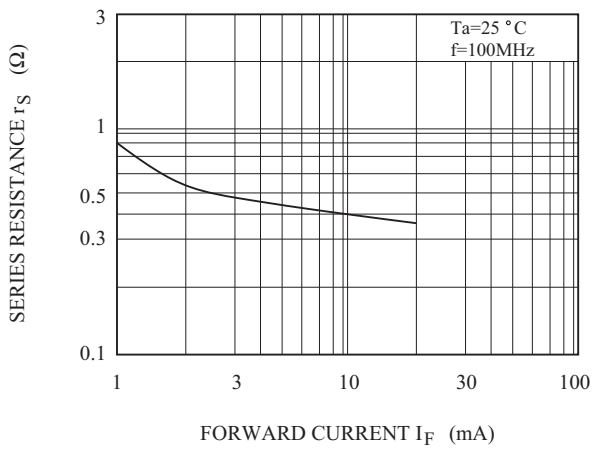

$C_T - V_R$

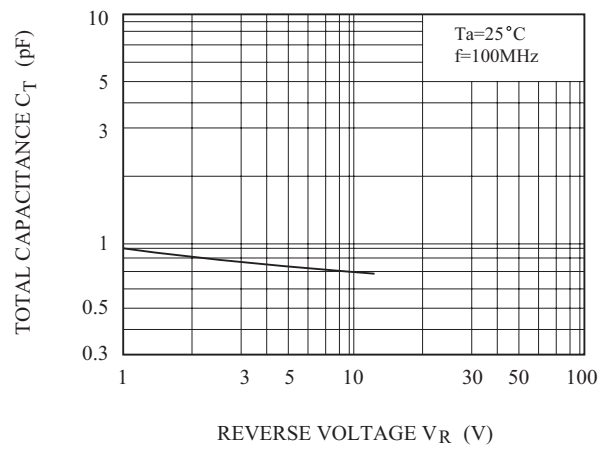

$I_F - V_F$

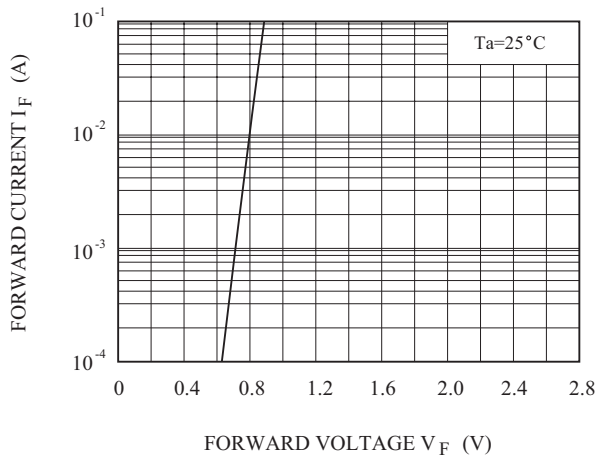

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEC\(开益禧\)](#)