



37 dBm IP3, 1.5 dB NF, Linear Amplifier, 23 dBm P1dB, 50 MHz to 1,000 MHz, 15 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A9001

The PE15A9001 is a High OIP3 Amplifier operating in the 50 MHz to 1000 MHz Frequency Range. The coaxial amplifier is unconditionally stable and can operate from 5 VDC to 12 VDC. The amplifier has OIP3 of 37 dBm typical and has a Gain of 15 dB typical.

Features

- 50 MHz to 1000 MHz Frequency Range
- Noise Figure 1.5 dB typ
- Gain 15 dB typ
- Gain Flatness +/- 0.7 dB typ
- OIP3 37 dBm typ

Applications

- Low Noise Amp
- Cellular Communicaitons
- GSM
- UMTS
- Wireless Data
- RFiD

Electrical Specifications (TA = +25°C, DC Voltage = 12Volts, DC Current = 85mA)

Description	Minimum	Typical	Maximum	Units
Frequency Range	50		1,000	MHz
Small Signal Gain	14.5	15		dB
Gain Flatness		±0.7		dB
Output at 1 dB Compression Point		+23		dBm
Output 3rd Intercept Point		+37		dBm
Noise Figure		1.5		dB
Input VSWR		1.45:1		
Output VSWR		1.45:1		
Operating DC Voltage	5		12	Volts
Operating DC Current		85		mA

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [37 dBm IP3, 1.5 dB NF, Linear Amplifier, 23 dBm P1dB, 50 MHz to 1,000 MHz, 15 dB Gain, SMA PE15A9001](#)





37 dBm IP3, 1.5 dB NF, Linear Amplifier, 23 dBm P1dB, 50 MHz to 1,000 MHz, 15 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A9001

Typical Performance Data

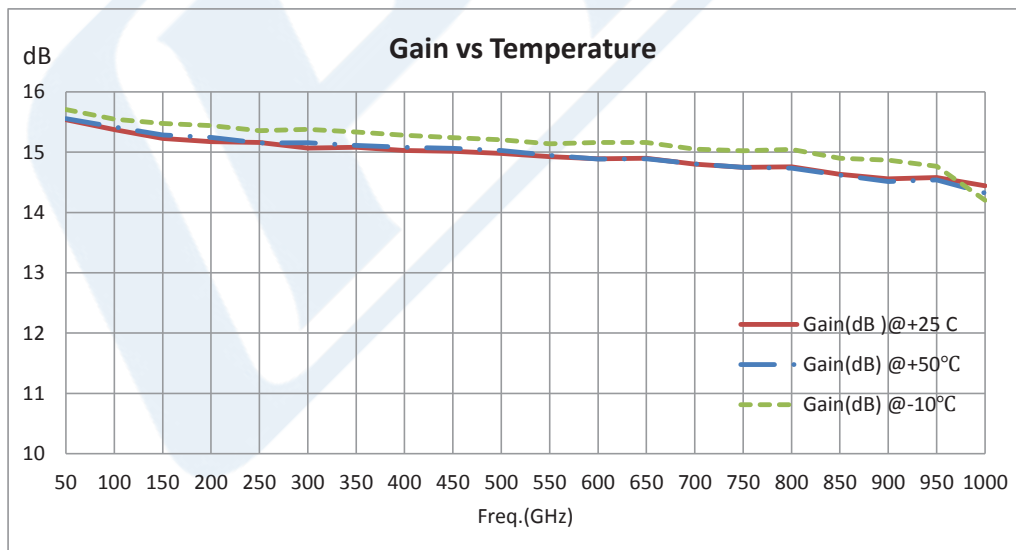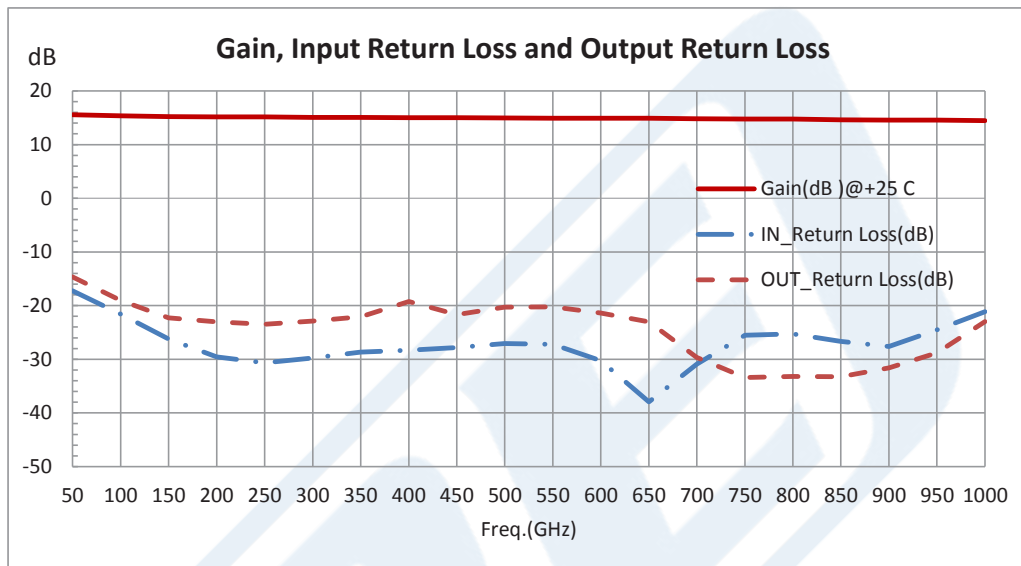



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [37 dBm IP3, 1.5 dB NF, Linear Amplifier, 23 dBm P1dB, 50 MHz to 1,000 MHz, 15 dB Gain, SMA PE15A9001](#)



37 dBm IP3, 1.5 dB NF, Linear Amplifier, 23 dBm P1dB, 50 MHz to 1,000 MHz, 15 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A9001

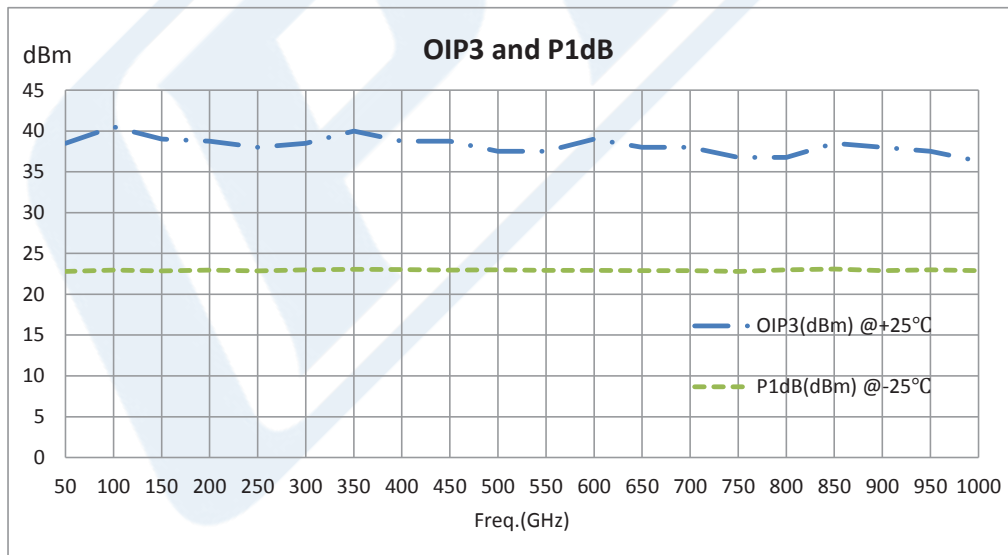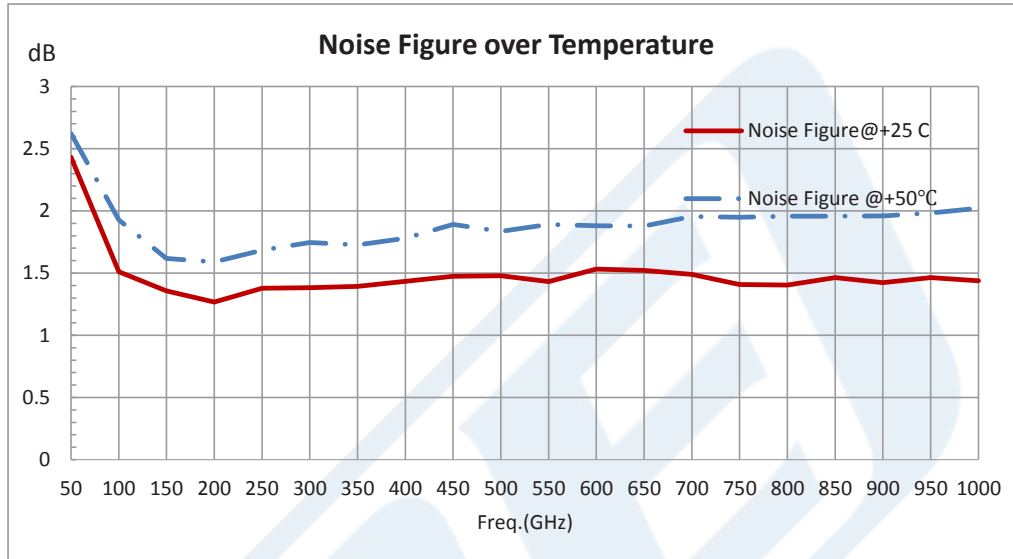

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [37 dBm IP3, 1.5 dB NF, Linear Amplifier, 23 dBm P1dB, 50 MHz to 1,000 MHz, 15 dB Gain, SMA PE15A9001](#)



37 dBm IP3, 1.5 dB NF, Linear Amplifier, 23 dBm P1dB, 50 MHz to 1,000 MHz, 15 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A9001

37 dBm IP3, 1.5 dB NF, Linear Amplifier, 23 dBm P1dB, 50 MHz to 1,000 MHz, 15 dB Gain, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [37 dBm IP3, 1.5 dB NF, Linear Amplifier, 23 dBm P1dB, 50 MHz to 1,000 MHz, 15 dB Gain, SMA PE15A9001](http://www.pasternack.com/37-dbm-ip3-1.5-db-nf-linear-amplifier-23-dbm-p1db-50-mhz-to-1000-mhz-15-db-gain-sma-pe15a9001)

URL: <http://www.pasternack.com/37-dbm-ip3-1.5-db-linear-amplifier-1000-mhz-15db-gain-sma-pe15a9001-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

37 dBm IP3, 1.5 dB NF, Linear Amplifier, 23 dBm P1dB,
50 MHz to 1,000 MHz, 15 dB Gain, SMA



PE15A9001

FSCM NO. 53919

Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

150

SIZE A

SCALE N/A

CAD FILE 013015

单击下面可查看定价，库存，交付和生命周期等信息

[>>PASTERNAK](#)