

30MHz VDSL2 & Vectored VDSL Transformer



- POTS VDSL2 and Vectored Transformer
- Compatible with Broadcoms BCM65x00 chipset family integrating Vectoring Technology
- Designed to help Meet ITU K20e Level Testing Requirements
- EN60950-1 Functional Isolation Compliant - 250Vrms
- RoHS-6 Compliant SMD Product
- Available on Tape & Reel

Electrical Specifications @ 25°C - Operating Temperature -40°C to +85°C

Part Number	OCL Line (1-4) with (2-3) shorted 10kHz, 100mVrms ±10%	Turns Ratio (1-4): (8-5) with (2-3, 6-7) shorted 100kHz, 100mVrms ±2%	Leakage Inductance (1-4) with others shorted 100kHz, 100mVrms (uH, Max)	LB 12MHz (dB, Max)	LB 17MHz (dB, Max)	LB 30MHz (dB, Max)	THD 30kHz 3.0Vrms (dB, Min)	THD 30kHz 3.0Vrms (dB, Typical) @ -40°C
BX4285LNL	430	1.4:1	1.0	-45	-42	-30	-60	-60
BX4286LNL	100	1.4:1	1.0	-45	-42	-30	-60	-60
	DCR (1-4) with (2-3) shorted (OHMS Max)	DCR (8-5) with (6-7) shorted (OHMS Max)	C _{ww} Line to Chip 100kHz, 100mVrms (pF Max)	IL 300kHz ~ 8MHz (dB Max)	IL 8MHz ~ 30MHz (dB Max)	Isolation Voltage (1-3) to (2-4) (Vrms, 6Sec)	Isolation Voltage Line to Chip (Vrms, 60Sec)	
BX4285LNL	1.0	1.0	35	0.5	3.5	750	1500	
BX4286LNL	1.0	1.0	35	0.5	3.5	750	1500	



Notes:

Add "T" suffix to part number to order on Tape & Reel i.e. BX4285LNLT, BX4286LNLT

Mechanical

Schematic

BX4285LNL/BX4286LNL

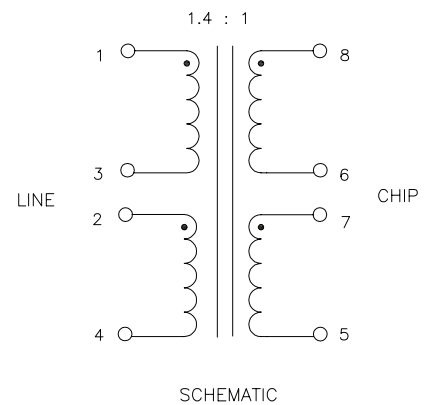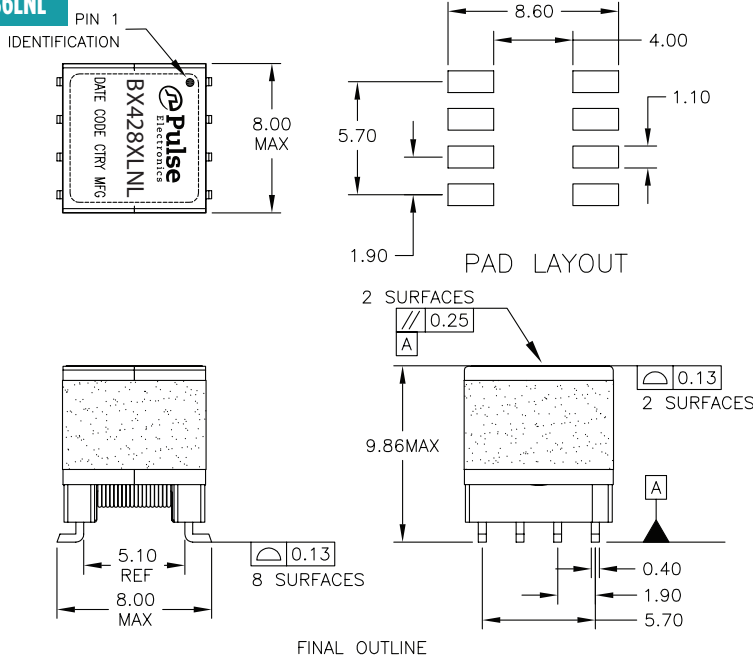

Weight1.4 grams
 Tray100/tray
 Tape & Reel.....300/tray
Dimensions: mm
 Unless otherwise specified,
 all tolerances are ± 0.1

30MH VDSL2 & Vectored VDSL Transformer

For More Information

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
D-71083 Herren-
berg
Germany

Tel: 49 7032 78060
Fax: 49 7032 7806 135

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technol-
ogy Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzen, PR China
518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia

3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.

Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2014. Pulse Electronics, Inc. All rights reserved.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Pulse\(普思\)](#)