

TECHNICAL DATA SHEET Description: 28dBi GNSS Mag Mount Antenna, Coax Feed

Series: GNSS Active Antenna

PART NUMBER: GNSSMMSMA

Features:

- Frequency 1559-1606 MHz
- Antenna Gain 1/2.4/3.5 dBic
- Polarization RHCP
- LNA Gain 28dB
- Current consumption 9mA
- Cable RG-174 with SMA Male
- RoHS Compliant

Applications:

- GPS, Glonass, Beidou
- Navigation
- Location Based Services
- Fleet management
- Asset tracking
- Indoor/Outdoor IP67



All dimensions are in mm / inches

Issue: 1914

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany

Tel: 1-360-944-7551 Downloaded From Oneyac.com

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998 1



Description: 28dBi GNSS Mag Mount Antenna, **Coax Feed**

Series: GNSS Active Antenna

PART NUMBER: GNSSMMSMA

ELECTRICAL SPECIFICATIONS

| Antenna Type | Patch |
|---|----------------------------------|
| Frequency | 1559-1563/1574-1577/1598-1606MHz |
| Nominal Impedance | 50 Ω |
| VSWR of Antenna | 2.5/2/2 Max |
| Radiation Pattern | Omni |
| Antenna Gain | 1/2.4/3.5 dBic |
| Efficiency | 55%/65%/85% |
| Polarization | RHCP |
| VSWR of LNA | 2 Max |
| LNA Gain | 28 dB Min |
| DC Power Input of LNA | 3~5 Vdc |
| Noise Figure | 1.1 dB Typ. |
| Power consumption(@3.3V) | 9 mA Typ. |
| MECHANICAL SPECIFICATIONS | |
| Overall Length | 35.2 x 44 x 14.5 mm |
| Weight | 68.39 g |
| Antenna Color / Material | Black/PC+ABS |
| Connector type | SMA Male |
| Cable type | RG-174 |
| Cable length | 3000 mm |
| Mounting Method | Magnet |
| ENVIRONMENTAL SPECIFICATIONS | |
| Operating Temperature | -40 ~ +85° C |
| Storage Temperature | -40 ~ +85° C |
| Ingress Protection | IP67 |
| RoHS Compliant | Yes |
| Issue: 1914 In the effort to improve our products, we reserve the right to make changes judged to be necessa | ry. ROHS |

CONFIDENTIAL AND PROPRIETARY INFORMATION




Description: 28dBi GNSS Mag Mount Antenna, Coax Feed

Series: GNSS Active Antenna

PART NUMBER: GNSSMMSMA

MECHANICAL DRAWING

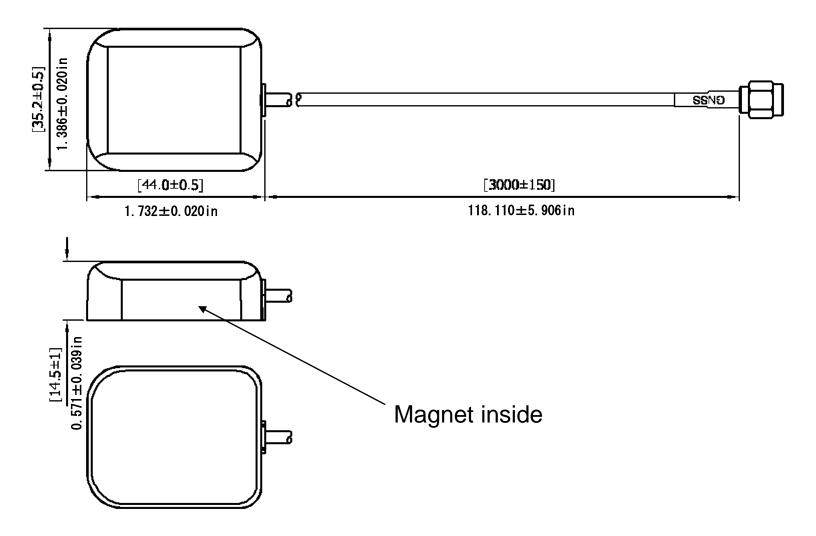

Issue: 1914

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



3




Description: 28dBi GNSS Mag Mount Antenna, Coax Feed

Series: GNSS Active Antenna


PART NUMBER: GNSSMMSMA

TEST SETUP OF ANTENNA

Test with 70*70mm ground plane.

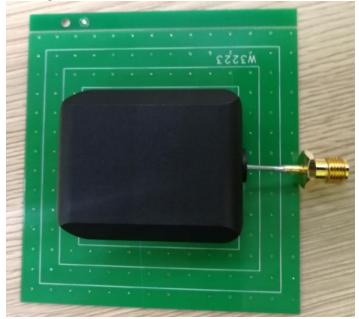

Axial Ratio vs Frequency

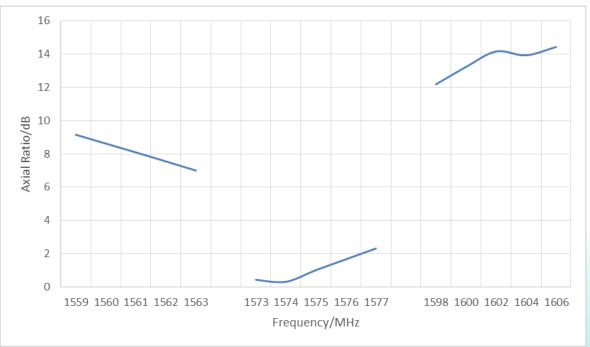

Issue: 1914

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents. or to manufacture. use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbid Downloaded From Oneyac.com

RoHS




Description: 28dBi GNSS Mag Mount Antenna, Coax Feed

Series: GNSS Active Antenna


PART NUMBER: GNSSMMSMA

CHARTS

VSWR of Antenna vs Frequency

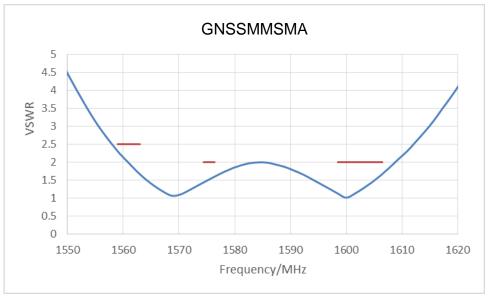

VSWR of LNA vs Frequency

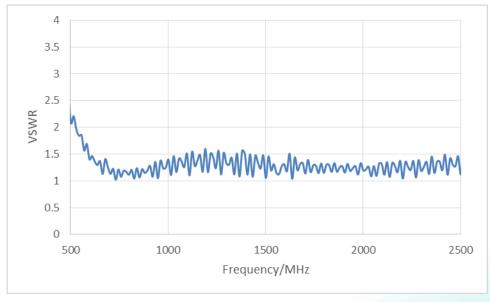

Issue: 1914

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



5




Description: 28dBi GNSS Mag Mount Antenna, Coax Feed

Series: GNSS Active Antenna


PART NUMBER: GNSSMMSMA

CHARTS

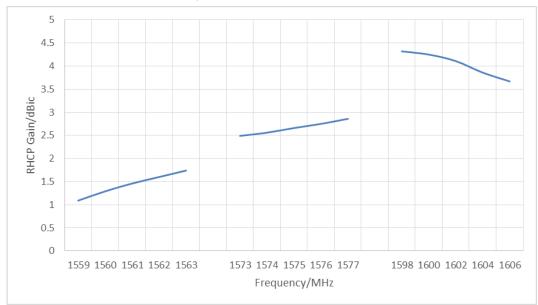

RHCP Gain vs Frequency

Radiation Efficiency vs Frequency

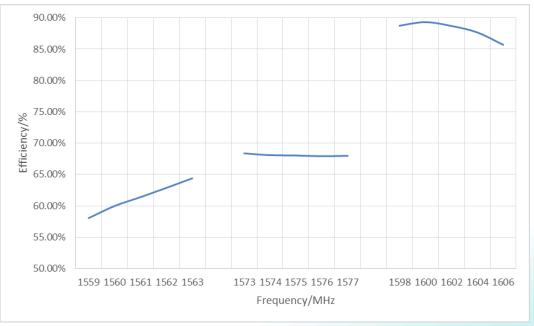

Issue: 1914

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: 28dBi GNSS Mag Mount Antenna, Coax Feed


Series: GNSS Active Antenna

PART NUMBER: GNSSMMSMA

CHARTS

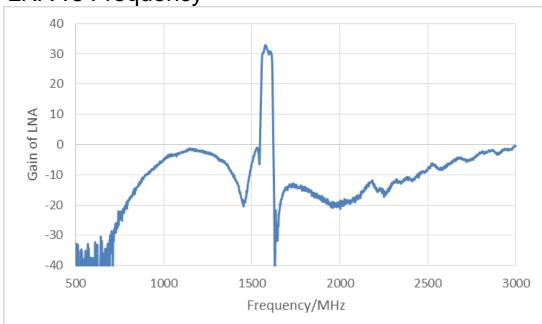

Gain of LNA vs Frequency

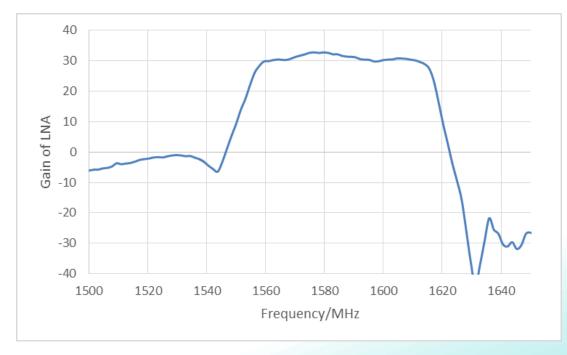

Issue: 1914

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

7




Description: 28dBi GNSS Mag Mount Antenna, Coax Feed

Series: GNSS Active Antenna

PART NUMBER: GNSSMMSMA

CHARTS

Radiation Pattern of BD,GPS and GLONASS

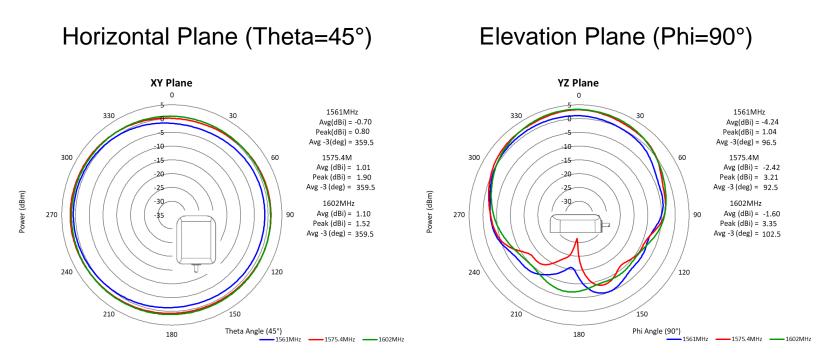

Issue: 1914

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



8



Description: 28dBi GNSS Mag Mount Antenna, Coax Feed

Series: GNSS Active Antenna

PART NUMBER: GNSSMMSMA

PACKAGING

1 PCS / PE Bag 80 PCS / Carton

Issue: 1914

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



9

单击下面可查看定价,库存,交付和生命周期等信息

>>Pulse(普思)