


RF/Microwave Capacitors

RF/Microwave Multilayer Capacitors (MLC)

700A Series NP0 Porcelain and Ceramic Multilayer Capacitors



FEATURES

- Case A Size (.055" x .055")
- Low ESR / ESL
- High Q
- Low Noise
- Capacitance Range 0.1 pF to 1000 pF
- Extended WVDC up to 250 VDC
- Zero TCC
- High Self-Resonance
- Established Reliability (QPL)

GENERAL DESCRIPTION

KYOCERA AVX, the industry leader, offers new improved ESR/ESL performance for the 700 A Series RF/Microwave Capacitors. The superior high self-resonance and zero TCC characteristic of this Series provide excellent performance over a broad range of RF and microwave applications requiring minimum drift. High density porcelain and ceramic constructions provide a rugged, hermetic package.

Typical functional applications: Bypass, Coupling, Tuning and DC Blocking.

Typical circuit applications: Filters, Oscillators and Timing

PACKAGING OPTIONS



Tape & Reel



Vertical Orientation Tape & Reel



Cap-Pak® (100 pcs)



ELECTRICAL SPECIFICATIONS

Temperature Coefficient (TCC)	0 ± 30 PPM/°C
Capacitance Range	0.1 pF to 1000 pF
Operating Temperature	-55°C to +125°C*
Quality Factor	Greater than 10,000 (0.1 pF to 100 pF) @ 1 MHz. Greater than 2000 (110 pF to 1000 pF) @ 1 MHz.
Insulation Resistance (IR)	0.1 pF to 470 pF 10 ⁶ Megohms min. @ 25°C at rated WVDC 10 ⁵ Megohms min. @ 125°C at rated WVDC 510 pF to 1000 pF 10 ⁵ Megohms min. @ 25°C at rated WVDC 10 ⁴ Megohms min. @ 125°C at rated WVDC
Working Voltage (WVDC)	See Capacitance Values table
Dielectric Withstanding Voltage (DWV)	250% of rated WVDC for 5 seconds
Aging Effects	None
Piezoelectric Effects	None
Capacitance Drift	± (0.02% or 0.02 pF), whichever is greater

ENVIRONMENTAL CHARACTERISTICS

Thermal Shock	Mil-STD-202, Method 107, Condition A
Moisture Resistance	Mil-STD-202, Method 106
Low Voltage Humidity	Mil-STD-202, Method 103, condition A, with 1.5 VDC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours
Life Test	MIL-STD-202, Method 108, for 2000 hours, at 125°C. 200% WVDC applied.
Solderability	Mil-STD-202, Method 208
Terminal Strength	Terminations for chips and pellets withstand a pull of 5 lbs. min., 10 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor.

RF/Microwave Capacitors

RF/Microwave Multilayer Capacitors (MLC)

700A Series NP0 Porcelain and Ceramic Multilayer Capacitors



CAPACITANCE VALUES

Cap. Code	Cap. (pF)	Tol.	Rated WVDC		Cap. Code	Cap. (pF)	Tol.	Rated WVDC		Cap. Code	Cap. (pF)	Tol.	Rated WVDC		Cap. Code	Cap. (pF)	Tol.	Rated WVDC	
			STD.	EXT.				STD.	EXT.				STD.	EXT.				STD.	EXT.
0R1	0.1	B	150	250	2R4	2.4	B, C, D	150	250	200	20	F, G, J, K, M	150	VOLTAGE	151	150	F, G, J, K, M	150	N/A
0R2	0.2				2R7	2.7				220	22				161	160			
0R3	0.3	B, C			3R0	3.0				240	24				181	180			
0R4	0.4				3R3	3.3				270	27				201	200			
0R5	0.5	B, C, D			3R6	3.6				300	30				221	220			
0R6	0.6				3R9	3.9				330	33				241	240			
0R7	0.7				4R3	4.3				360	36				271	270			
0R8	0.8				4R7	4.7				390	39				301	300			
0R9	0.9				5R1	5.1				430	43				331	330			
1R0	1.0				5R6	5.6				470	47				361	360			
1R1	1.1		6R2	6.2	510	51	391	390											
1R2	1.2		B, C, D	6R8	6.8	560	56	431	430										
1R3	1.3			7R5	7.5	200	62	471	470										
1R4	1.4			8R2	8.2		68	511	510										
1R5	1.5	9R1		9.1	75		561	560											
1R6	1.6	100		10	82		621	620											
1R7	1.7	110		11	91		681	680											
1R8	1.8	120		12	101		751	750											
1R9	1.9	130		13	110		821	820											
2R0	2.0	150		15	120		911	910											
2R1	2.1	160		16	130		102	1000											
2R2	2.2	180	18																

$v_{rms} = 0.707 \times WVDC$


Special values, tolerances, higher WVDC and matching available. Please consult factory.

note: extended wvdc does not apply to cdr products.

Capacitance values in bold type indicate porcelain dielectric. All other capacitance values indicate ceramic dielectric.

All 700 A Capacitors are available laser marked with KYOCERA AVX identification, capacitance code and tolerance.

HOW TO ORDER

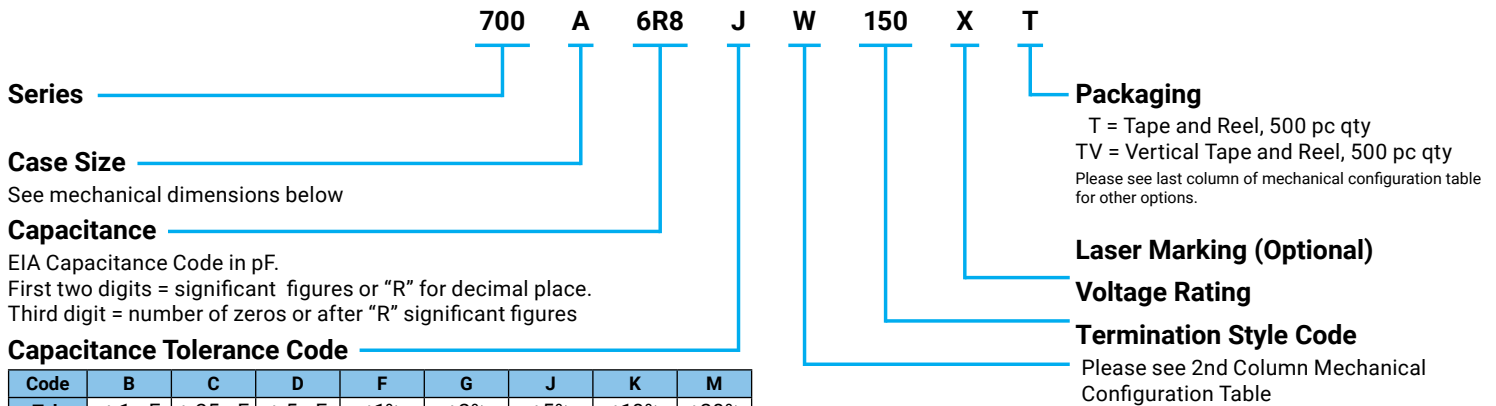

The above part number refers to a 700A Series (case size A) 6.8 pF capacitor, J tolerance (+/-5%), 150 WVDC, with W termination, (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and Tape and Reel Packaging.

RF/Microwave Capacitors

RF/Microwave Multilayer Capacitors (MLC)

700A Series NP0 Porcelain and Ceramic Multilayer Capacitors



MECHANICAL CONFIGURATION

Series & Case Size	Term. Code	MIL-PRF-55681	Case Size & Type	Outline ES W/T is a Termination Surface	Body Dimensions inches (mm)			Lead and Termination Dimensions and Material			
					Length (L)	Width (W)	Thickness (T)	Overlap (Y)	Materials	Pkg Type	Pkg Code
700A	W	CDR12BP	A Solder Plate		.055+.015-.010 (1.40+0.38-0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010+.010-.005 (0.25+0.25-.013)	Tin/ Lead, Solder Plated over Nickel Barrier Termination	T&R, 1000 or 500 pcs Vertical T&R, 1000 or 500 pcs Cap Pac, 100 pcs	T1K or T TV1K or TV C100
700A	P	CDR12BP	A Pellet		.055+.025-.010 (1.40+0.64-0.25)	.055 ±.015 (1.40 ±0.38)			Heavy Tin/ Lead Coated, over Nickel Barrier Termination	T&R, 1000 or 500 pcs Vertical T&R, 1000 or 500 pcs Cap Pac, 100 pcs	T1K or T TV1K or TV C100
700A	T	N/A	A Solderable Nickel Barrier		.055+.015-.010 (1.40+0.38-0.25)	.055 ±.015 (1.40 ±0.38)			RoHS Compliant Tin Plated over Nickel Barrier Termination	T&R, 1000 or 500 pcs Vertical T&R, 1000 or 500 pcs Cap Pac, 100 pcs	T1K or T TV1K or TV C100
700A	CA	CDR11BP	A Gold Chip		.055+.015-.010 (1.40+0.38-0.25)	.055 ±.015 (1.40 ±0.38)			RoHS Compliant Gold Plated over Nickel Barrier Termination	T&R, 1000 or 500 pcs Vertical T&R, 1000 or 500 pcs Cap Pac, 100 pcs	T1K or T TV1K or TV C100

NON-MAGNETIC CONFIGURATION

Series & Case Size	Term. Code	MIL-PRF-55681	Case Size & Type	Non-Magnetic Configuration	Body Dimensions inches (mm)			Lead and Termination Dimensions and Material			
					Length (L)	Width (W)	Thickness (T)	Overlap (Y)	Materials	Pkg Type	Pkg Code
700A	WN	Meets Requirements	A Non-Mag Solder Plate		.055+.025-.010 (1.40+0.64-0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010+.010-.005 (0.25+0.25-.013)	Tin/ Lead, Solder Plated over Non-Magnetic Barrier Termination	T&R, 1000 or 500 pcs Vertical T&R, 1000 or 500 pcs Cap Pac, 100 pcs	T1K or T TV1K or TV C100
700A	PN	Meets Requirements	A Non-Mag Pellet		.055+.025-.010 (1.40+0.64-0.25)	.055 ±.015 (1.40 ±0.38)			Heavy Tin/ Lead Coated, over Non-Magnetic Barrier Termination	T&R, 1000 or 500 pcs Vertical T&R, 1000 or 500 pcs Cap Pac, 100 pcs	T1K or T TV1K or TV C100
700A	TN	Meets Requirements	A Non-Mag Solderable Barrier		.055+.015-.010 (1.40+0.38-0.25)	.055 ±.015 (1.40 ±0.38)			RoHS Compliant Tin Plated over Non-Magnetic Barrier Termination	T&R, 1000 or 500 pcs Vertical T&R, 1000 or 500 pcs Cap Pac, 100 pcs	T1K or T TV1K or TV C100

*Capacitors with values greater than 100 pF contain a trace magnetic element that may exhibit weak magnetic properties.

RF/Microwave Capacitors

RF/Microwave Multilayer Capacitors (MLC)

700A Series NP0 Porcelain and Ceramic Multilayer Capacitors



SUGGESTED MOUNTING PAD DIMENSIONS

Horizontal Electrode Orientation


Vertical Electrode Orientation

Case A					
Mount Type	Pad Size	A Min.	B Min.	C Min.	D Min.
Vertical Mount	Normal	.070	.050	.030	.130
	High Density	.050	.030	.030	.090
Horizontal Mount	Normal	.080	.050	.030	.130
	High Density	.060	.030	.030	.090


Dimensions are in inches.

PERFORMANCE DATA


ESR VS. CAPACITANCE
SERIES 700, CASE A

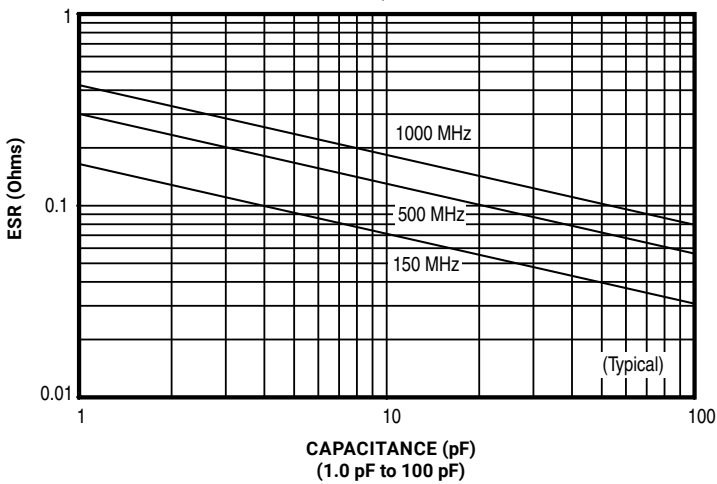


Q VS. CAPACITANCE
SERIES 700, CASE A

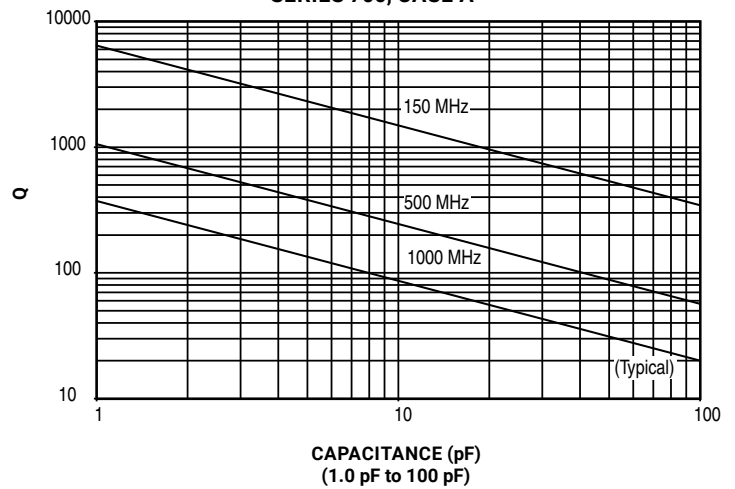

ESR VS. CAPACITANCE
SERIES 700, CASE A

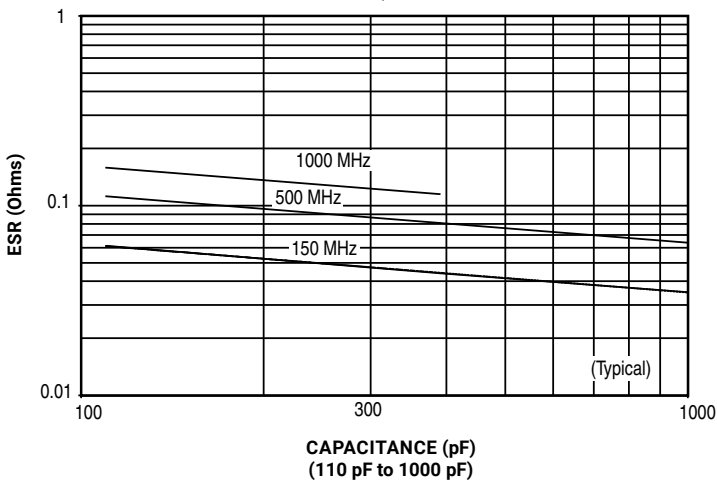

Q VS. CAPACITANCE
SERIES 700, CASE A

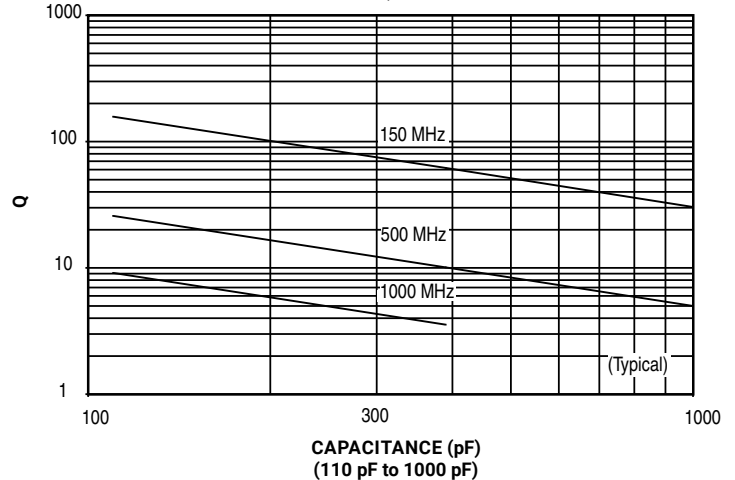

RF/Microwave Capacitors


RF/Microwave Multilayer Capacitors (MLC)

700A Series NP0 Porcelain and Ceramic Multilayer Capacitors



PERFORMANCE DATA


SERIES RESONANCE VS. CAPACITANCE
SERIES 700, CASE A

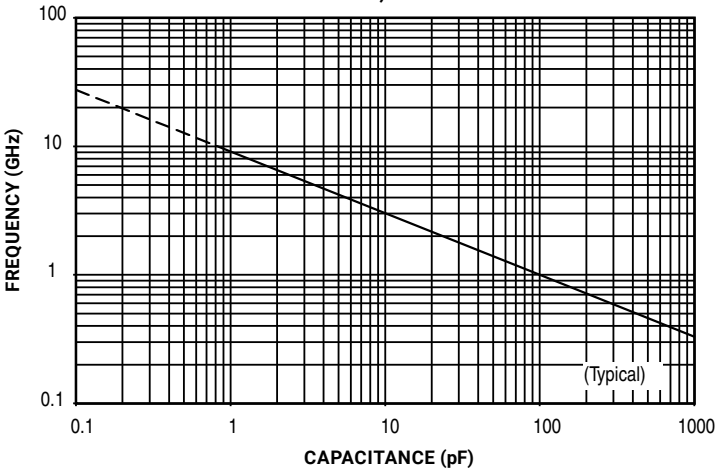

CAPACITANCE CHANGE VS. TEMPERATURE
SERIES 700, CASE A




CURRENT RATING VS. CAPACITANCE
SERIES 700, CASE A

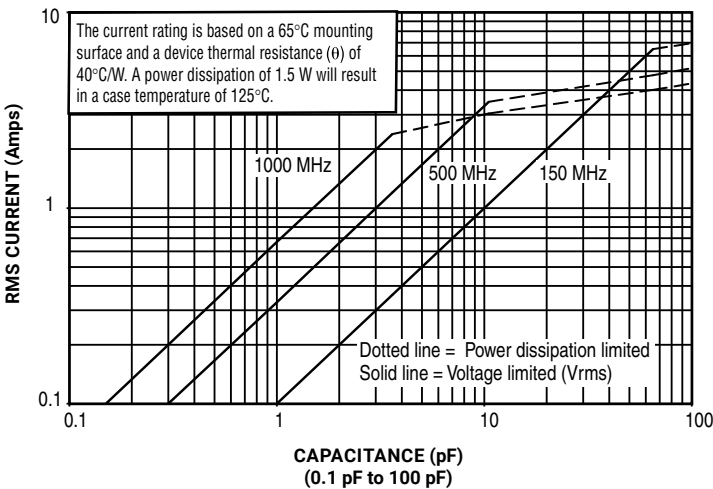

CURRENT RATING VS. CAPACITANCE
SERIES 700, CASE A



CURRENT RATING VS. CAPACITANCE
SERIES 700, CASE A, EXTENDED VOLTAGE

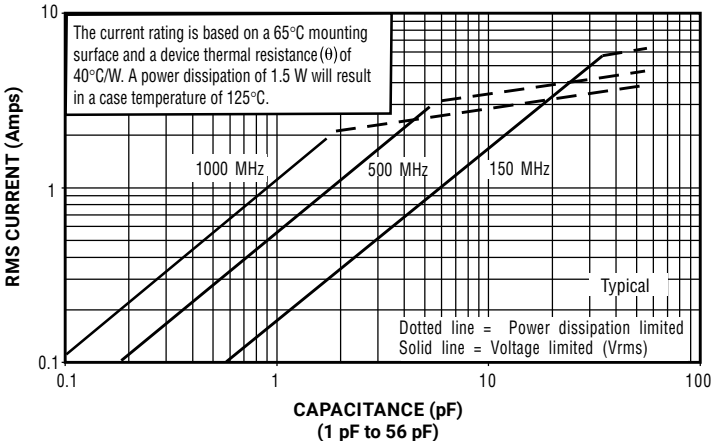

CURRENT RATING VS. CAPACITANCE
SERIES 700, CASE A, EXTENDED VOLTAGE



RF/Microwave Capacitors
RF/Microwave Multilayer Capacitors (MLC)
700A Series NP0 Porcelain and Ceramic Multilayer Capacitors



SAMPLE KITS

Kit #	RoHS Compliant	Item Number	Description	Cap. Value Range (pF)	Cap Value (pF)	Tol.	Price
Kit 4	-	DK0004	700A Porcelain and Ceramic 16 different values, 15 pc. min. per value	0.1 to 2.0	0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1.0, 1.1, 1.2, 1.5	±0.1	\$158.40
Kit 4T		DK0004T			1.5, 1.8, 2.0	±0.25	
Kit 5	-	DK0005	700A Porcelain and Ceramic 16 different values, 15 pc. min. per value	1.0 to 10	1.0, 1.2, 1.5, 1.8, 2.0, 2.2, 2.4, 2.7, 3.0, 3.3,	±0.1	\$158.40
Kit 5T		DK0005T			3.9, 4.7, 5.6, 6.8, 8.2	±0.25	
Kit 6	-	DK0006	700A Porcelain and Ceramic 16 different values, 15 pc. min. per value	10 to 100	10, 12, 15, 18, 20, 22, 24, 27, 30, 33, 39, 47, 56, 68, 82, 100	± 5%	\$158.40
Kit 6T		DK0006T					
Kit 7	-	DK0007	700A Porcelain and Ceramic 16 different values, 15 pc. min. per value	100 to 1000	100, 120, 150, 180, 200, 220, 240, 270 300, 330, 390, 470	±5%	\$158.40
Kit 7T		DK0007T			560, 680, 820, 1000.....	±10	

单击下面可查看定价，库存，交付和生命周期等信息

[>>AVX](#)