





## Features

- Wide Maximum Allowable Voltage from(Recommended MCOV) 55V to 560V
- Fast responding to transient over-voltage
- Large absorbing transient energy capability
- Low clamping ratio and no follow-on current
- Moisture sensitivity level: Level 1
- Operating Temperature:-40℃~+105℃
- Storage Temperature:-40℃~+105℃

## Application information

- AC Power
- Surge protection in consumer electronics
- Surge protection in industrial electronics
- Surge protection in electronic home appliances, gas and petroleum appliances
- Relay and electromagnetic valve surge absorption

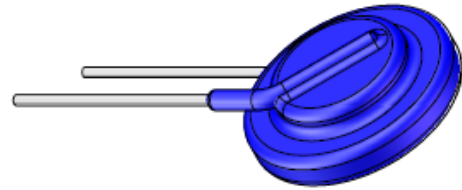
## Agency Approvals

Icon	Description
<b>RoHS</b>	Compliance with 2011/65/EU
<b>HF</b>	Compliance with IEC61249-2-21:2003
	Mean lead free
	Compliance with UL1449, Certificated E337906

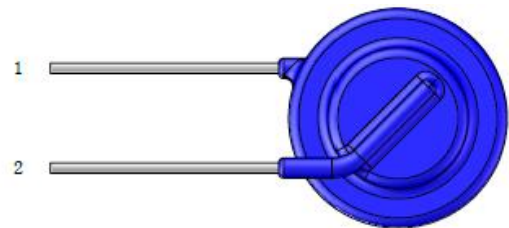
## Electrical Characteristics

Part No	UL	Recommended	UL	Split Components Parameters		Platform	Peak	Withstanding	Maximum	Typical
	VOLTS	MCOV	MCOV	MOV Voltage	GDT Voltage	voltage	voltage	Surge Current	Energy	Capacitance (Reference)
	V <sub>AC</sub> (V)	V <sub>AC</sub> (V)	V <sub>AC</sub> (V)	V <sub>1mA</sub> (V)	V <sub>100V/S</sub> (V)	V <sub>1000V/us</sub> (V)	V <sub>1000V/us</sub> (V)	1.2/50-8/20µs 6kV-3kA (Time)	10/1000µs (J)	@1KHz (pf)
BMG14D820K091Y	52	55	70	82(74~90)	90(72~108)	≤150	≤710	40	27.0	5
BMG14D820K351Y	52	60	70	82(74~90)	350(280~420)	≤150	≤1020	40	27.0	5
BMG14D101K091Y	65	70	85	100(90~110)	90(72~108)	≤180	≤710	40	33.0	5
BMG14D101K351Y	65	75	85	100(90~110)	350(280~420)	≤180	≤1020	40	33.0	5
BMG14D121K091Y	75	80	100	120(108~132)	90(72~108)	≤210	≤710	40	40.0	5
BMG14D121K351Y	75	90	100	120(108~132)	350(280~420)	≤210	≤1020	40	40.0	5
BMG14D151K091Y	95	100	120	150(135~165)	90(72~108)	≤270	≤708	40	53.0	5
BMG14D151K351Y	95	115	120	150(135~165)	350(280~420)	≤270	≤1020	40	53.0	5
BMG14D181K091Y	115	120	150	180(162~198)	90(72~108)	≤320	≤710	40	60.0	5
BMG14D181K351Y	115	135	150	180(162~198)	350(280~420)	≤320	≤1020	40	60.0	5


## Exterior



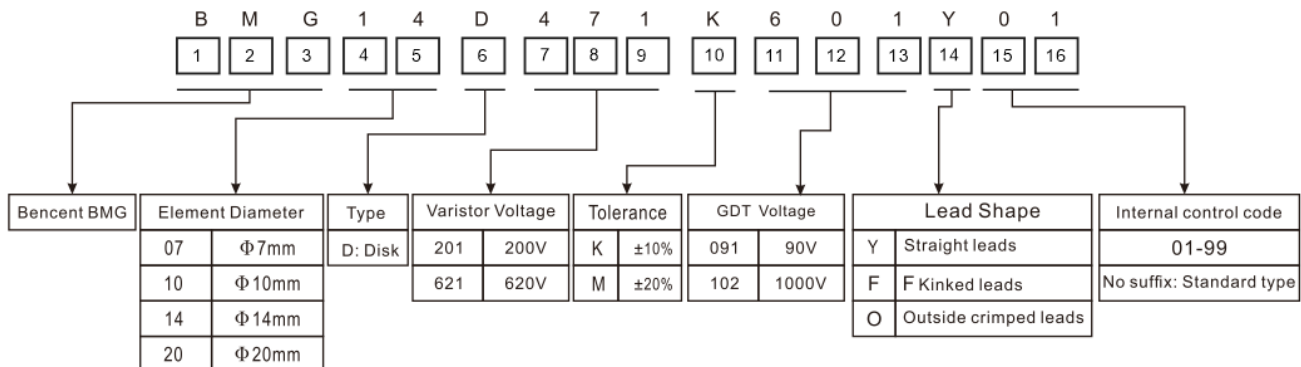
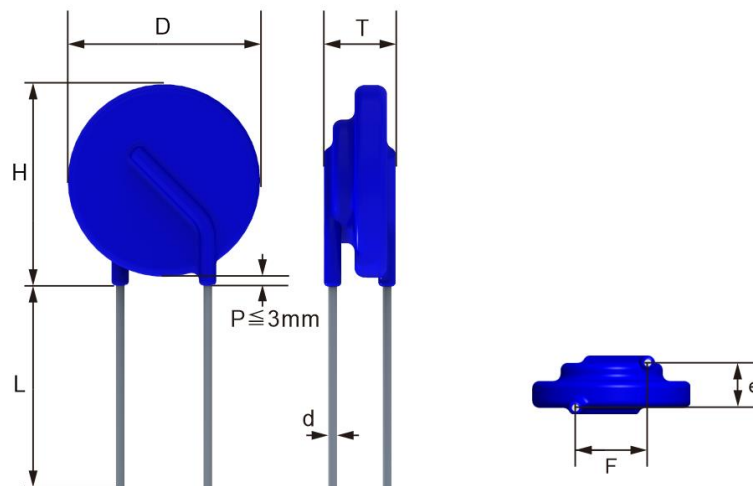
## Package (Top View)



## Schematic Symbol



Part No	UL	Recommended	UL	Split Components Parameters		Platform voltage	Peak voltage	Withstanding Surge Current	Maximum Energy	Typical Capacitance (Reference)
	VOLTS	MCOV	MCOV	MOV Voltage	GDT Voltage					
	V <sub>AC</sub> (V)	V <sub>AC</sub> (V)	V <sub>AC</sub> (V)	V <sub>1mA</sub> (V)	V <sub>100V/S</sub> (V)	V <sub>1000V/us</sub> (V)	V <sub>1000V/us</sub> (V)	1.2/50-8/20μs 6kV-3kA (Time)	10/1000μs (J)	@1KHz (pf)
BMG14D201K091Y	130	140	170	200(180~220)	90(72~108)	≤350	≤710	40	70.0	5
BMG14D201K351Y	130	145	170	200(180~220)	350(280~420)	≤350	≤1020	40	70.0	5
BMG14D221K351Y	140	150	185	220(198~242)	350(280~420)	≤390	≤1020	40	78.0	5
BMG14D221K601Y	140	170	185	220(198~242)	600(480~720)	≤390	≤1320	40	78.0	5
BMG14D241K351Y	150	160	200	240(216~264)	350(280~420)	≤430	≤1020	40	84.0	5
BMG14D241K601Y	150	180	200	240(216~264)	600(480~720)	≤430	≤1320	40	84.0	5
BMG14D271K351Y	175	190	230	270(243~297)	350(280~420)	≤480	≤1020	40	99.0	5
BMG14D271K601Y	175	210	230	270(243~297)	600(480~720)	≤480	≤1320	40	99.0	5
BMG14D301K351Y	190	200	250	300(270~330)	350(280~420)	≤530	≤1020	40	108.0	5
BMG14D301K601Y	190	230	250	300(270~330)	600(480~720)	≤530	≤1320	40	108.0	5
BMG14D331K351Y	210	220	280	330(297~363)	350(280~420)	≤580	≤1020	40	115.0	5
BMG14D331K601Y	210	250	280	330(297~363)	600(480~720)	≤580	≤1320	40	115.0	5
BMG14D361K351Y	230	240	300	360(324~396)	350(280~420)	≤640	≤1020	40	130.0	5
BMG14D361K601Y	230	270	300	360(324~396)	600(480~720)	≤640	≤1320	40	130.0	5
BMG14D391K351Y	250	260	330	390(351~429)	350(280~420)	≤690	≤1020	40	140.0	5
BMG14D391K102Y	250	310	330	390(351~429)	1000(800~1200)	≤690	≤1800	40	140.0	5
BMG14D431K601Y	275	300	360	430(387~473)	600(480~720)	≤760	≤1320	40	155.0	5
BMG14D431K102Y	275	330	360	430(387~473)	1000(800~1200)	≤760	≤1800	40	155.0	5
BMG14D471K601Y	300	320	390	470(423~517)	600(480~720)	≤830	≤1320	40	175.0	5
BMG14D471K102Y	300	360	390	470(423~517)	1000(800~1200)	≤830	≤1800	40	175.0	5
BMG14D511K601Y	320	340	420	510(459~561)	600(480~720)	≤986	≤1320	40	180.0	5
BMG14D511K102Y	320	390	420	510(459~561)	1000(800~1200)	≤900	≤1800	40	180.0	5
BMG14D561K601Y	350	370	460	560(504~616)	600(480~720)	≤986	≤1320	40	185.0	5
BMG14D561K102Y	350	420	460	560(504~616)	1000(800~1200)	≤990	≤1800	40	185.0	5
BMG14D621K601Y	385	400	510	620(558~682)	600(480~720)	≤1100	≤1320	40	190.0	5
BMG14D621K102Y	385	460	510	620(558~682)	1000(800~1200)	≤1100	≤1800	40	190.0	5
BMG14D681K601Y	420	440	550	680(612~748)	600(480~720)	≤1200	≤1320	40	200.0	5
BMG14D681K102Y	420	520	550	680(612~748)	1000(800~1200)	≤1200	≤1800	40	200.0	5
BMG14D751K601Y	460	480	600	750(675~825)	600(480~720)	≤1320	≤1320	40	210.0	5
BMG14D751K102Y	460	560	600	750(675~825)	1000(800~1200)	≤1320	≤1800	40	210.0	5

**Part Numbering System**

**Dimensions**


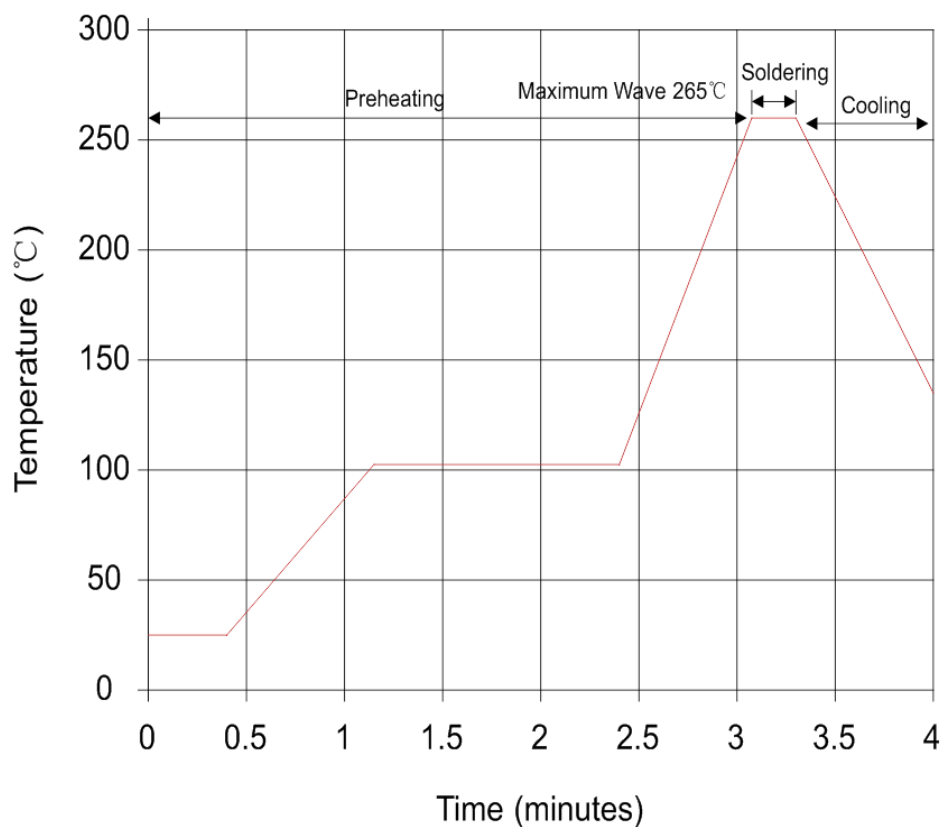
Notes: The foot shape can be customized according to customer needs.

Unit: mm

Symbol	Dimension
H(max)	20
L(min)	20
D(max)	16
F	$7.5 \pm 0.8$
T	Table 2
$e(\pm 1.0)$	Table 2
$d(\pm 0.05)$	0.8

Unit: mm

Model	T(Max)	e	Model	T(Max)	e
820K	7.50	3.93	331K	8.50	4.83
101K	7.50	4.14	361K	8.50	5.00
121K	7.50	4.36	391K	9.00	5.17
151K	8.00	4.70	431K	9.00	5.39
181K	8.00	4.00	471K	9.00	5.61
201K	8.00	4.11	511K	9.00	5.83
221K	8.00	4.22	561K	9.00	6.11
241K	8.00	4.33	621K	10.00	6.44
271K	8.00	4.50	681K	10.00	6.78
301K	8.50	4.67	751K	10.00	7.17

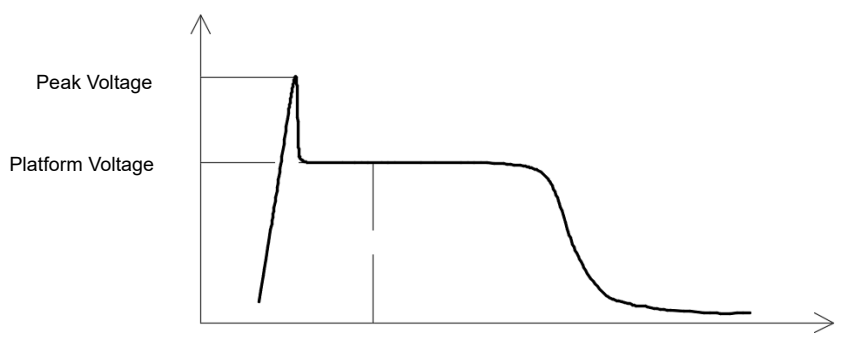
**Soldering Recommendation**
**Lead-free Wave Soldering Recommendation**


Item	Conditions
Peak Temperature	265°C
Dipping Time	10 seconds (max)
Soldering	1 time

**Recommendation Reworking Conditions with Soldering Iron**


Item	Conditions
Temperature of Soldering Iron-tip	360°C
Soldering Time	3 seconds (max)
Distance from Varistor	2mm (min)

**Mechanical Characteristics**

Items	Test conditions / Methods	Specifications								
1000V/us Wave chart		Impulse Voltage Wave								
Tensile Strength of Terminals	Gradually applying the force specified and keeping the unit fixed for 10±1 sec <table border="1" data-bbox="327 840 1109 1019"> <thead> <tr> <th>Terminal diameter (mm)</th> <th>Force (kg)</th> </tr> </thead> <tbody> <tr> <td>0.5 &lt; d ≤ 0.8</td> <td>1.0</td> </tr> <tr> <td>0.8 &lt; d ≤ 1.25</td> <td>2.0</td> </tr> <tr> <td>1.25 &lt; d</td> <td>4.0</td> </tr> </tbody> </table>	Terminal diameter (mm)	Force (kg)	0.5 < d ≤ 0.8	1.0	0.8 < d ≤ 1.25	2.0	1.25 < d	4.0	No visible damage Peak voltage  ΔV1000V/us/V1000V/us  ≤±20% Platform voltage  ΔV1000V/us/V1000V/us  ≤±10%
Terminal diameter (mm)	Force (kg)									
0.5 < d ≤ 0.8	1.0									
0.8 < d ≤ 1.25	2.0									
1.25 < d	4.0									
Bending Strength of Terminals	Hold specimen and apply the force specified below to each lead. Bend the specimen to 90°, then return to the original position. Repeat the procedure in the opposite direction. <table border="1" data-bbox="327 1164 1109 1344"> <thead> <tr> <th>Terminal diameter (mm)</th> <th>Force (kg)</th> </tr> </thead> <tbody> <tr> <td>0.5 &lt; d ≤ 0.8</td> <td>0.5</td> </tr> <tr> <td>0.8 &lt; d ≤ 1.25</td> <td>1.0</td> </tr> <tr> <td>1.25 &lt; d</td> <td>2.0</td> </tr> </tbody> </table>	Terminal diameter (mm)	Force (kg)	0.5 < d ≤ 0.8	0.5	0.8 < d ≤ 1.25	1.0	1.25 < d	2.0	No visible damage Peak voltage  ΔV1000V/us/V1000V/us  ≤±20% Platform voltage  ΔV1000V/us/V1000V/us  ≤±10%
Terminal diameter (mm)	Force (kg)									
0.5 < d ≤ 0.8	0.5									
0.8 < d ≤ 1.25	1.0									
1.25 < d	2.0									
Vibration	Frequency range: 10~55 Hz Amplitude: 0.75mm or 98m/s <sup>2</sup> Direction: 3 mutually perpendicular directions, 2hrs each.	No visible damage Peak voltage  ΔV1000V/us/V1000V/us  ≤±20% Platform voltage  ΔV1000V/us/V1000V/us  ≤±10%								
Solder ability	Solder Temp: 245±5°C Dipping Time: 2±0.5 sec	Atleast 95% of terminal electrode is covered by new solder								
Resistance to Soldering Heat	Solder Temp: 260±5°C Dipping Time: 10±1 sec	No visible damage Peak voltage  ΔV1000V/us/V1000V/us  ≤±20% Platform voltage  ΔV1000V/us/V1000V/us  ≤±10%								

**Reliability**

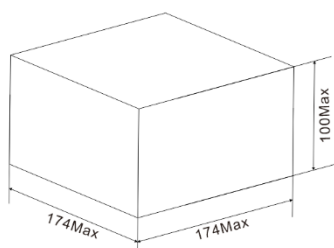
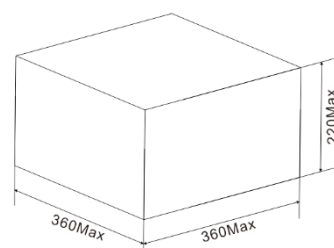
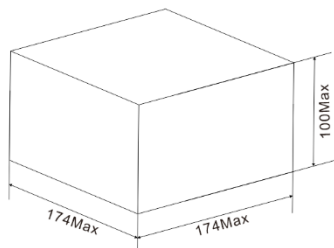
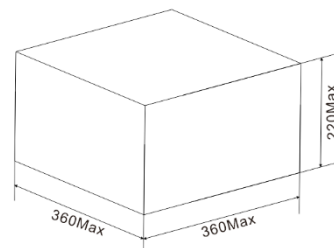
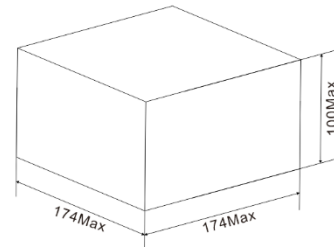
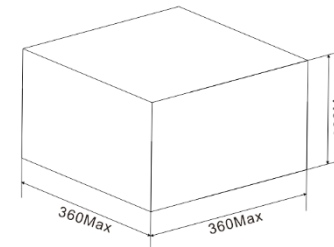
Items	Test conditions / Methods	Specifications															
High Temperature Storage	Ambient Temp: 105±2°C Duration: 1000hrs	No visible damage Peak voltage  ΔV1000V/us/V1000V/us  ≤±20% Platform voltage  ΔV1000V/us/V1000V/us  ≤±10%															
Low Temperature Storage	Ambient Temp: -40±2°C Duration: 1000hrs	No visible damage Peak voltage  ΔV1000V/us/V1000V/us  ≤±20% Platform voltage  ΔV1000V/us/V1000V/us  ≤±10%															
Humidity	Ambient Temp: 40±2°C, 90~95% R.H. Duration: 1000hrs	No visible damage Peak voltage  ΔV1000V/us/V1000V/us  ≤±20% Platform voltage  ΔV1000V/us/V1000V/us  ≤±10%															
Temperature Cycle	The conditions shown below shall be repeated 5 cycles <table border="1" data-bbox="397 1099 1182 1317"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Period (minutes)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-40±3</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>15±3</td> </tr> <tr> <td>3</td> <td>105±3</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>15±3</td> </tr> </tbody> </table>	Step	Temperature (°C)	Period (minutes)	1	-40±3	30±3	2	Room temperature	15±3	3	105±3	30±3	4	Room temperature	15±3	No visible damage Peak voltage  ΔV1000V/us/V1000V/us  ≤±20% Platform voltage  ΔV1000V/us/V1000V/us  ≤±10%
Step	Temperature (°C)	Period (minutes)															
1	-40±3	30±3															
2	Room temperature	15±3															
3	105±3	30±3															
4	Room temperature	15±3															
High Temperature Load	Ambient Temp: 105±2°C Duration: 1000hrs Load: Max. Allowable Voltage In AC eara.	No visible damage Peak voltage  ΔV1000V/us/V1000V/us  ≤±20% Platform voltage  ΔV1000V/us/V1000V/us  ≤±10%															
Damp Heat Load	Ambient Temp: 40±2°C, 90~95% R.H. Duration: 1000hrs Load: Max. Allowable Voltage	No visible damage Peak voltage  ΔV1000V/us/V1000V/us  ≤±20% Platform voltage  ΔV1000V/us/V1000V/us  ≤±10%															
Voltage Proof	Metal balls method, 1000Vac 1 min.(820K~331K), 1500Vac 1 min.(361K~751K)	No visible damage															

**Marking Code**


1. BMG:Bencent MOV+GDT
2. XX:Disk size 07、 10、 14、 20
3. D: Disk
4. XXX: Varistor Voltage
5. K: Tolerance,  $k=\pm 10$
6. XX:Special Code
7. UL Mark

**Quantity**

Packaging Dimensions (Unit: mm)

	Inner box size	Outer box size	Quantity
Bulk			300pcs/bag 2bags/box 8Inner Box/Per Carton (820K~361K)
Bulk			250pcs/bag 2bags/box 8Inner Box/Per Carton (391K~511K)
Bulk			200pcs/bag 2bags/box 8Inner Box/Per Carton (561K~751K)



单击下面可查看定价，库存，交付和生命周期等信息

[>>Bencent \(槟城\)](#)