

FEATURES

- Able to be used at wide temperature from -25°C to 85°C
- Long life Endurance : 2,000 hours at +85°C
- RoHS directive compliant/No Explosion Safety



APPLICATIONS


- Memory back-up for Video, Audio, Cameras, CCTV, Printer, Camcorder, Telephones, Car stereo, E-meter, Toy, Computer, Notebook PC, Rice cooker, Home network etc.

PART NUMBER SYSTEM

CBH	3R6	224	H	F	*
Series	Rated Voltage	Capacitance	Type	RoHS	Special Code

GENERAL SPECIFICATIONS / DIMENSIONS

Item	Performance			
Operating temperature	-25°C to +85°C			
Capacitance range	0.22F to 0.47F			
Capacitance tolerance	- 20% to + 80% (at 25°C)			
Rated voltage	3.6 VDC			
Nominal capacitance & Resistance	Nominal capacitance (F)	0.22	0.33	0.47
	Nominal resistance (Ω)	75	50	50
Temperature characteristics	Capacitance change: Within ±50% of initial measured value at +25°C Internal resistance: Within ±500% of initial measured value at +25°C			
Endurance (At rated voltage & max. operating temp)	After 2000 hours: Capacitance change: ±30% of initial rated value Internal resistance: Within 5 times of initial specified value			
Shelf life	After 2 years at 25°C without load, the capacitor shall meet the specified endurance limits.			

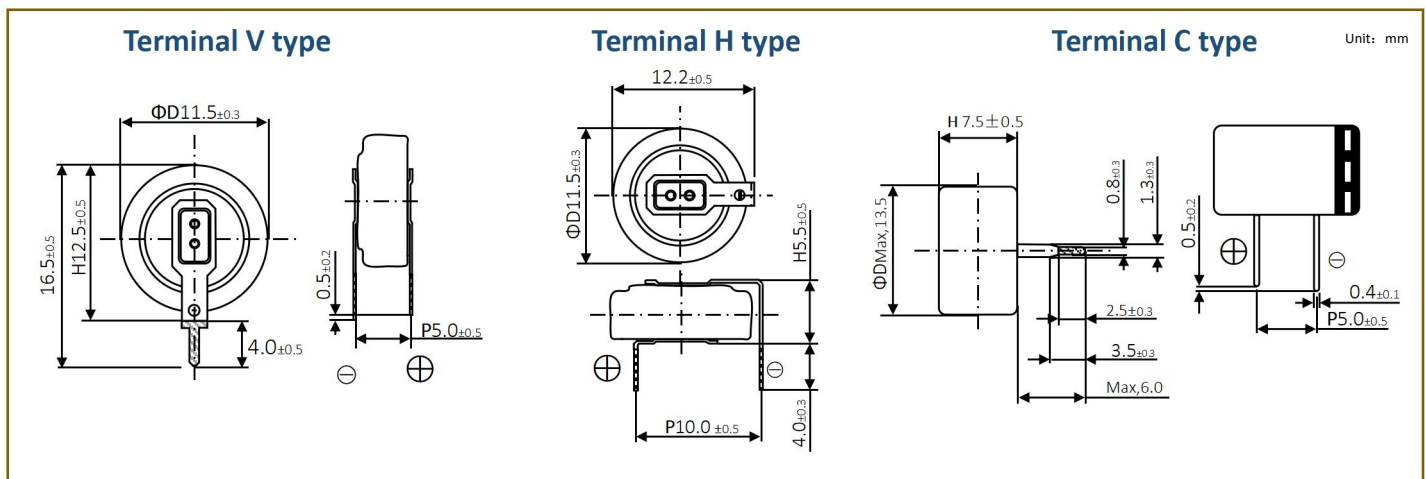

STANDARD PRODUCTS

Part Number	Working Voltage (V DC)	Rated Cap. (F)	Internal resistance (Ω) at 1 kHz	V type(mm)			H type(mm)			C type(mm)		
				ΦD	H	P	ΦD	H	P	ΦD	H	P
CBH 3R6 224 ()	3.6	0.22	≤75	11.5	12.5	5.0	11.5	5.5	10.0	13.5	7.5	5.0
CBH 3R6 334 ()	3.6	0.33	≤50	11.5	12.5	5.0	11.5	5.5	10.0	13.5	7.5	5.0
CBH 3R6 474 ()	3.6	0.47	≤50	11.5	12.5	5.0	11.5	5.5	10.0	13.5	7.5	5.0

单击下面可查看定价，库存，交付和生命周期等信息

[>>CDA\(智烽维\)](#)