

FEATURES

- Able to be used at wide temperature from -25°C to 70°C
- Long life Endurance : 1,000 hours at +70°C
- RoHS directive compliant / No Explosion Safety

APPLICATIONS

- Memory back-up for Video, Audio, Cameras, CCTV, Printer, Camcorder, Telephones, Car stereo, E-meter, Toy, Computer, Notebook PC, Rice cooker, Home network etc.




PART NUMBER SYSTEM

CK	6R3	104	C	F	*
Series	Rated Voltage	Capacitance	Type	RoHS	Special Code

GENERAL SPECIFICATIONS / DIMENSIONS

Item	Performance				
Operating temperature	-25°C to +70°C				
Capacitance range	0.1F to 1.0F				
Capacitance tolerance	- 20% to + 80%(at25°C)				
Rated voltage	6.3 VDC				
Nominal capacitance & Resistance	Nominal capacitance (F)	0.1	0.33	0.68	1.0
	Nominal resistance (Ω)	75	75	50	30
Characteristics at Low temperature(-25°C)	Capacitance change: Within ±50% of initial measured value at +25°C Internal resistance: Within ±500% of initial measured value at +25°C				
Endurance (At rated voltage & max. operating temp)	After 1000 hours: Capacitance change: ±30% of initial rated value Internal resistance: Within 4 times of initial specified value				
Shelf life	After 2 years at 25°C without load, the capacitor shall meet the specified endurance limits.				

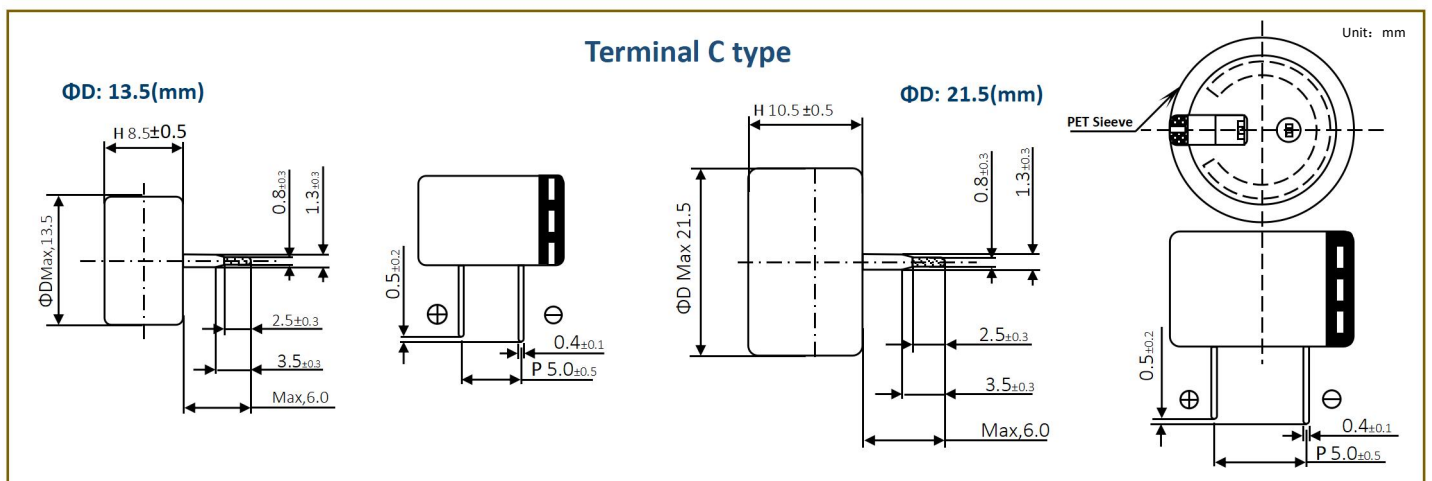

Part Number	Working Voltage (V DC)	Rated Cap. (F)	Internal resistance (Ω) at 1 kHz	C type(mm)		
				ØD	H	P
CK 6R3 104 ()	6.3	0.1	≤75	13.5	8.5	5.0
CK 6R3 334 ()	6.3	0.33	≤75	13.5	8.5	5.0
CK 6R3 684 ()	6.3	0.68	≤50	21.5	10.5	5.0
CK 6R3 105 ()	6.3	1.0	≤30	21.5	10.5	5.0

单击下面可查看定价，库存，交付和生命周期等信息

[>>CDA\(智烽维\)](#)