

ITR8102

Features

- Fast response time
- High analytic
- High sensitivity
- Pb free
- This product itself will remain within RoHS compliant version

Description

The **ITR8102** consist of an infrared emitting diode and an NPN silicon phototransistor, encased side-by-side on converging optical axis in a black thermoplastic housing. The phototransistor receives radiation from the IR only. This is the normal situation. But when an object is in between, phototransistor could not receive the radiation.

Applications

- Mouse Copier
- Switch Scanner
- Floppy disk driver
- Non-contact Switching
- For Direct Board

Device Selection Guide

| Device No. | Chip Material | LENS COLOR |
|------------|---------------|-------------|
| IR | GaAlAs | Water Clear |
| PT | Silicon | Water Clear |

Absolute Maximum Ratings (Ta=25°C)



| Parameter | | Symbol | Ratings | Unit |
|--|--|--------------------|---------|------|
| Input | Power Dissipation at(or below) 25°C Free Air Temperature | Pd | 75 | mW |
| | Reverse Voltage | V _R | 5 | V |
| | Forward Current | I _F | 50 | mA |
| | Peak Forward Current (*1) Pulse width ≤ 100μ s, Duty cycle=1% | I _{FP} | 1 | A |
| Output | Collector Power Dissipation | P _C | 75 | mW |
| | Collector Current | I _C | 30 | mA |
| | Collector-Emitter Voltage | B V _{CEO} | 30 | V |
| | Emitter-Collector Voltage | B V _{ECO} | 5 | V |
| Operating Temperature | | T _{opr} | -25~+85 | °C |
| Storage Temperature | | T _{stg} | -40~+85 | °C |
| Lead Soldering Temperature (*2) (1/16 inch form body for 5 seconds) | | T _{sol} | 260 | °C |

(* 1) $t_w=100 \mu \text{ sec.}$, $T=10 \text{ msec.}$ (* 2) $t=5 \text{ Sec}$


Electro-Optical Characteristics (Ta=25°C)

| Parameter | | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|--------------------------|------------------------|------------------|------|------|------|-----------------|---|
| Input | Forward Voltage | V_F | --- | 1.2 | 1.5 | V | $I_F=20\text{mA}$ |
| | Reverse Current | I_R | --- | --- | 10 | μA | $V_R=5\text{V}$ |
| | Peak Wavelength | λ_p | --- | 940 | --- | nm | $I_F=20\text{mA}$ |
| | View Angle | 2 θ 1/2 | --- | 60 | --- | Deg | $I_F=20\text{mA}$ |
| Output | Dark Current | I_{CEO} | --- | --- | 100 | nA | $V_{CE}=20\text{V}, E_e=0\text{mW/cm}^2$ |
| | C-E Saturation Voltage | $V_{CE(sat)}$ | --- | --- | 0.4 | V | $I_C=2\text{mA}$ $E_e=1\text{mW/cm}^2$ |
| Transfer Characteristics | Collect Current | $I_C(\text{ON})$ | 0.9 | --- | 15 | mA | $V_{CE}=5\text{V } I_F=20\text{mA}$ |
| | Rise time | t_r | --- | 15 | --- | μsec | $V_{CE}=5\text{V}$ $I_C=1\text{mA}$ $R_L=1\text{K}\Omega$ |
| | Fall time | t_f | --- | 15 | --- | μsec | |


Typical Electrical/Optical/Characteristics Curves for IR

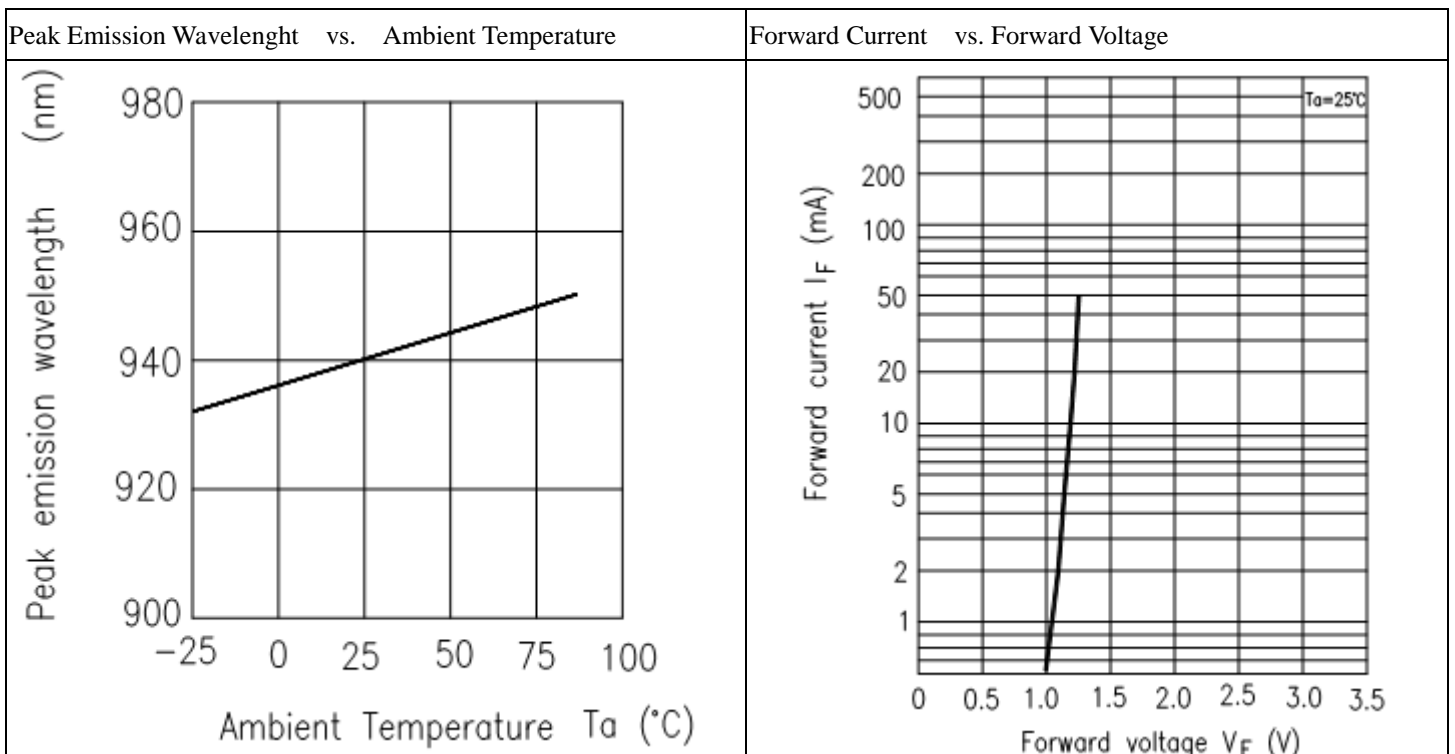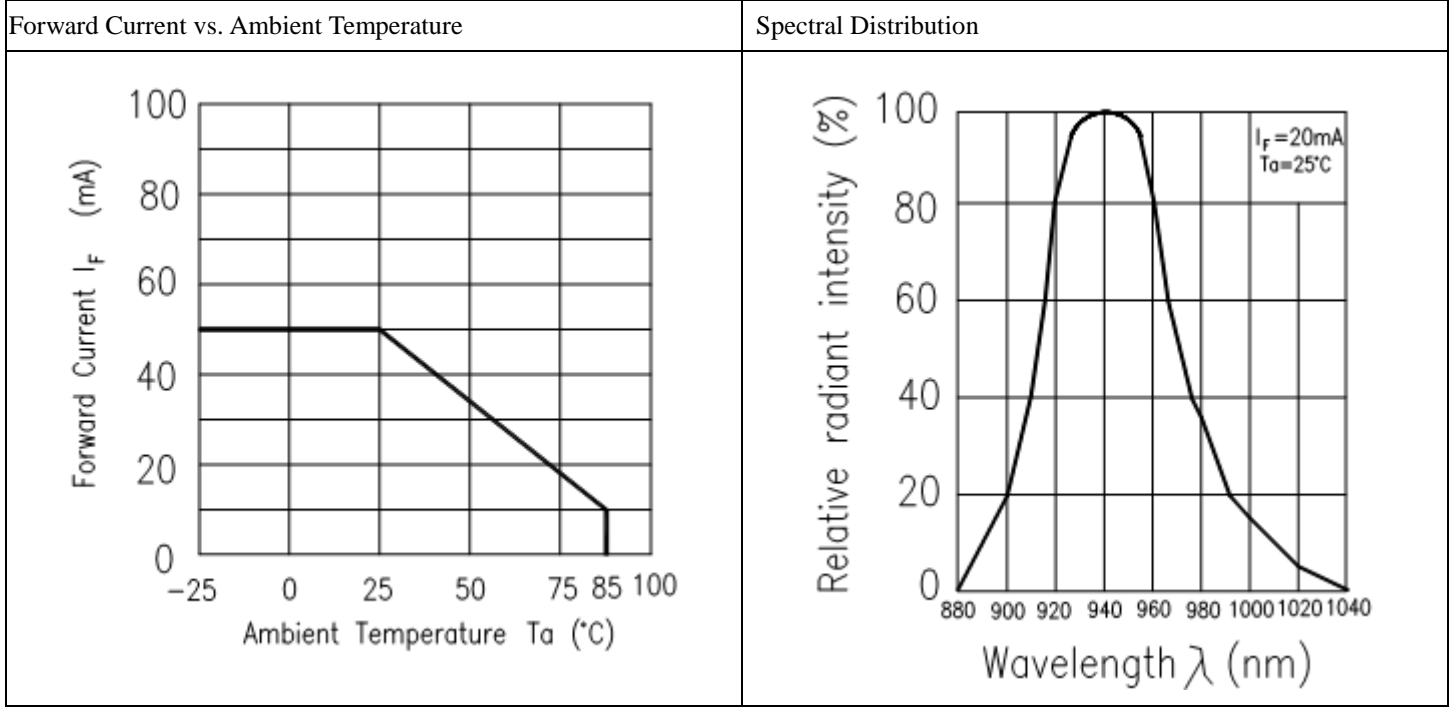

Forward Current vs. Ambient Temperature

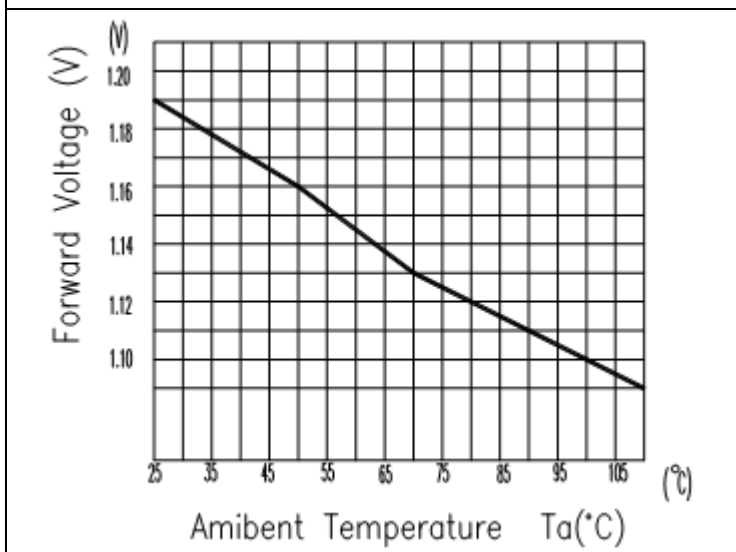


Relative Radiant Intensity vs. Angular Displacement

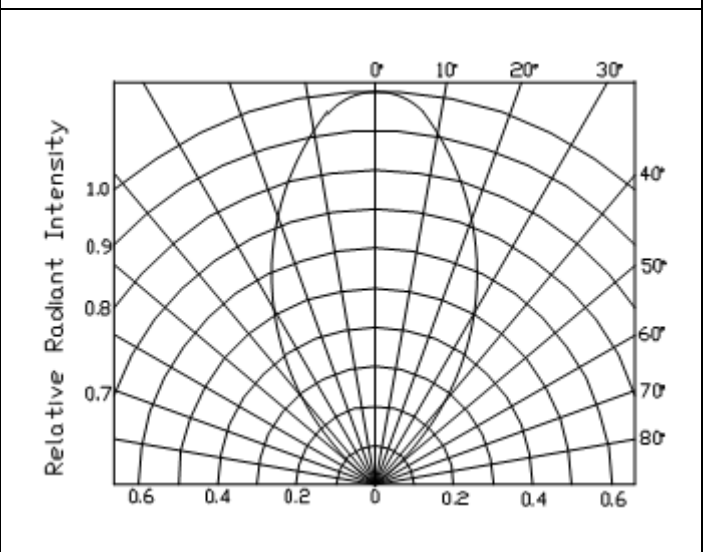


Typical Electro/Optical/Characteristics Curves for PT


Collector Power Dissipation vs. Ambient Temperature

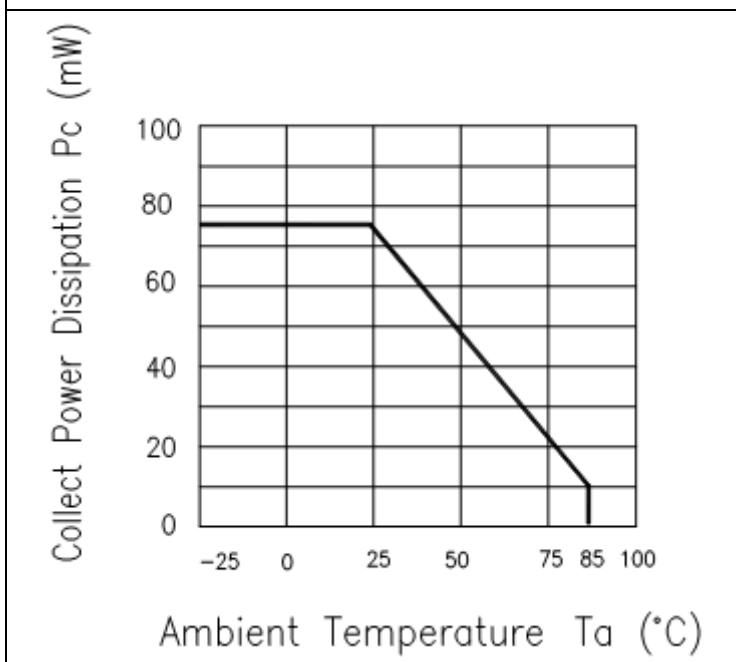


Spectral Sensitivity

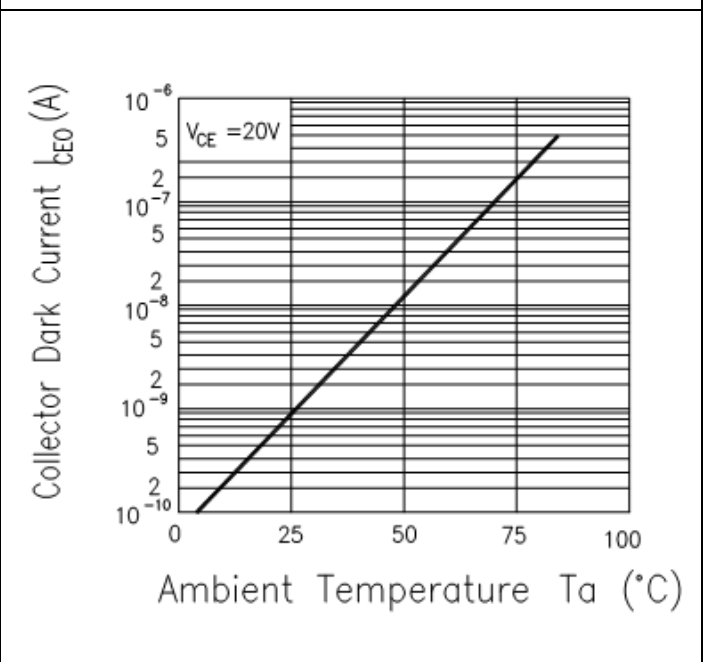


Relative Collector Current vs Ambient Temperature

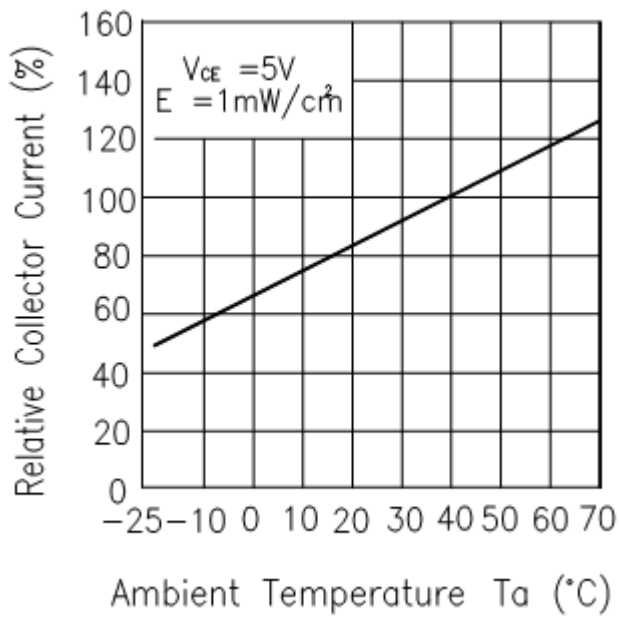


Collector Current vs. Irradiance

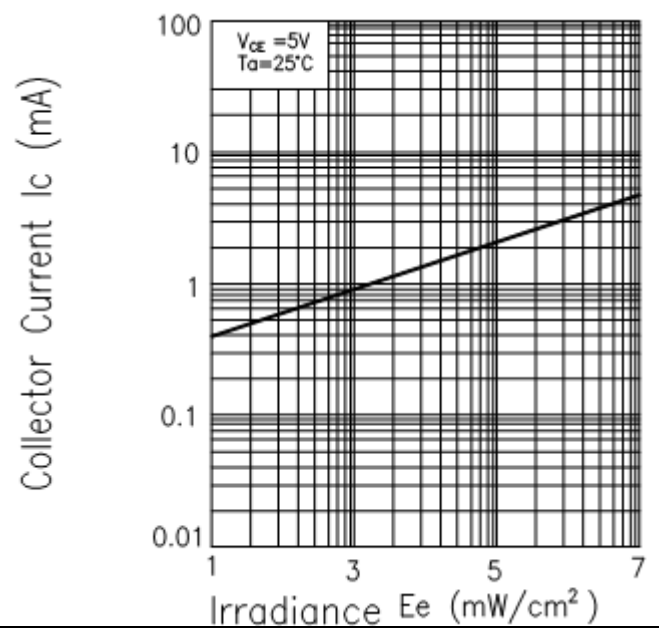


Spectral Sensitivity

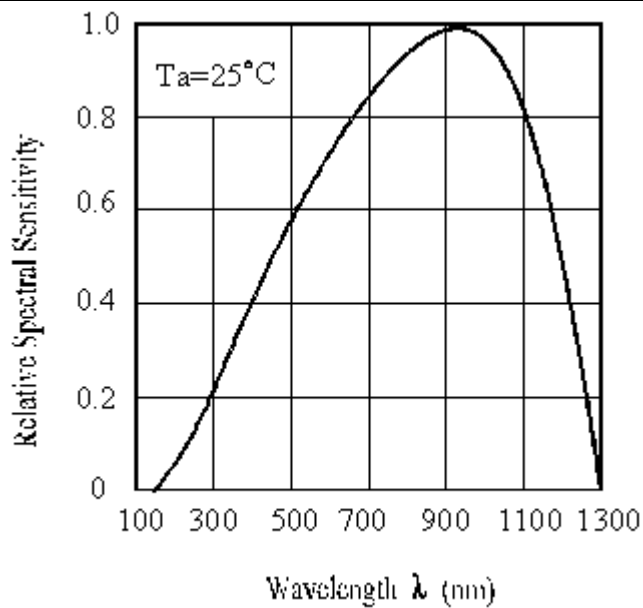

Collector Current vs. Collector-emitter Voltage

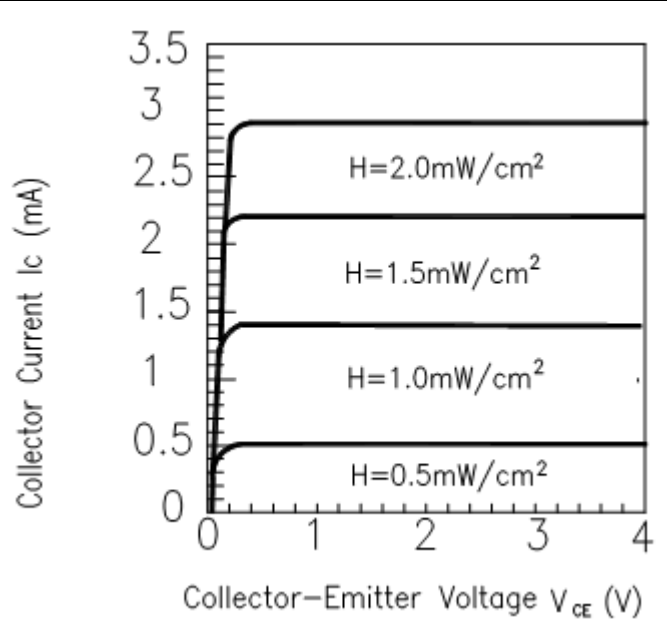

Package Dimension

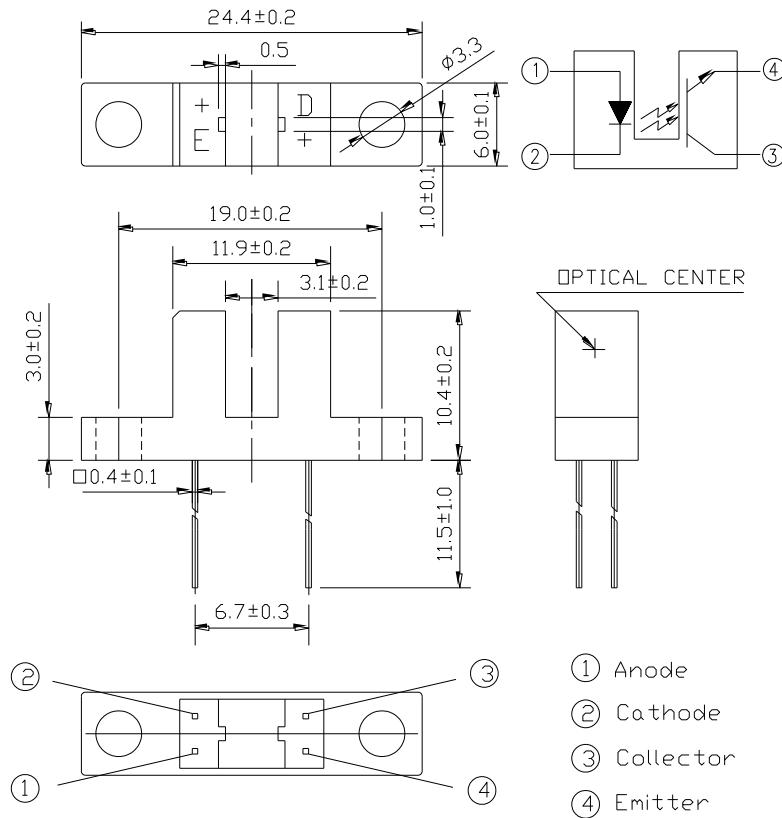

Notes:

1. All dimensions are in millimeters
2. Tolerances unless dimensions ± 0.2 mm
3. Lead spacing is measured where the lead emerge from the package
4. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification
5. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent
6. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.

Packing Quantity Specification

1. 20pcs/1Tube, 100Tubes/1Box
2. 4Boxes/1Carton

Label Form Specification



- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number
- X: Month
- Reference: Identify Label Number

Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Everlight \(亿光\)](#)