

ABS205 THRU ABS210

SINGLE PHASE 2.0 AMP SURF ACE MOUNT BRIDGE RECTIFIERS

FEATURES

- * Ideal for printed circuit board
- * Reliable low cost construction utilizing molded plastic technique
- * High surge current capability
- * Polarity: Symbol molded on body
- * Mounting position: Any
- * Weight: 0.12 grams


VOLTAGE RANGE

50 to 1000 Volts

CURRENT

2.0 Ampere

ABS

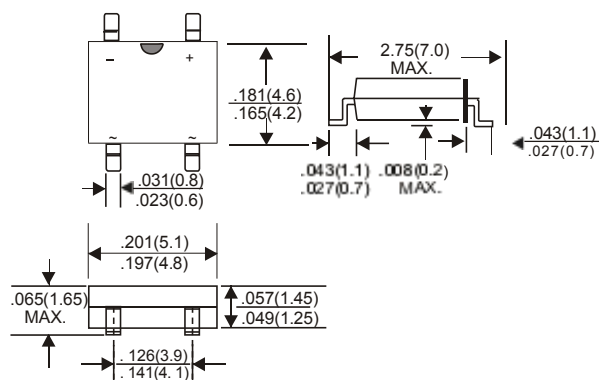

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25 °C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	ABS205	ABS21	ABS22	ABS24	ABS26	ABS28	ABS210	UNITS	
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current at Ta=40°C(Note 1)								2.0	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)								5.0	A
Maximum Forward Voltage Drop per Bridge Element at 1.0 A D.C.								1.0	V
Maximum DC Reverse Current Ta=25 C								5.0	μA
at Rated DC Blocking Voltage Ta=125 C								500	μA
Typical Thermal Resistance R JA (Note 2)								75	C/W
Operating Temperature Range, Tj								-55—+150	C
Storage Temperature Range, Tstg								-55—+150	C

NOTES: 1. Mounted on P.C. Board.
2. Thermal Resistance Junction to Ambient.

RATING AND CHARACTERISTIC CURVES (ABS205 THRU ABS210)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

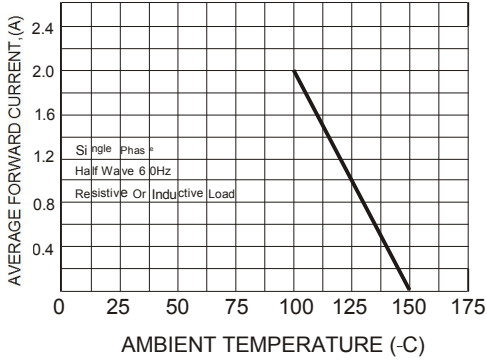


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

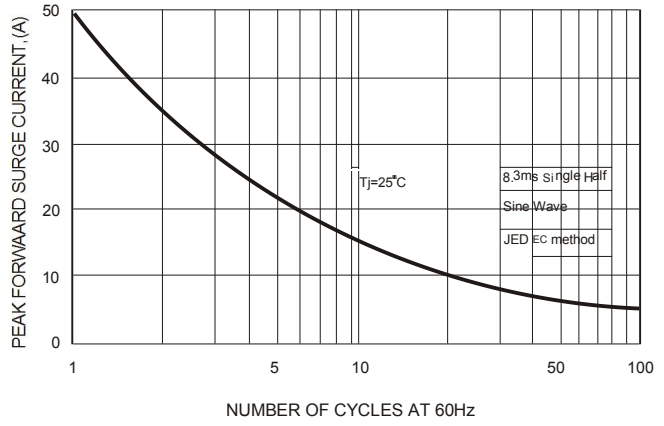


FIG.3-TYPICAL FORWARD CHARACTERISTICS


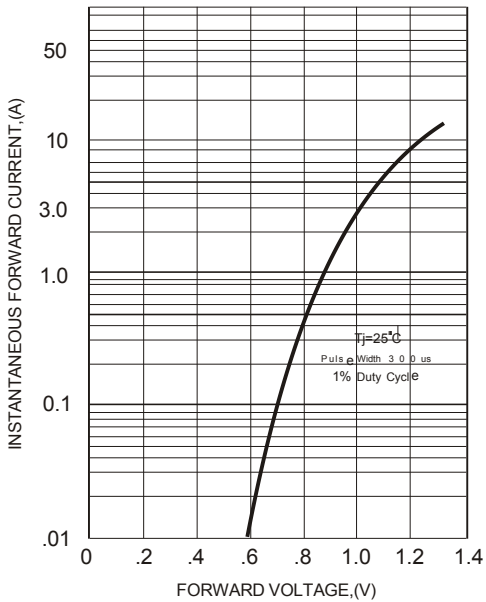


FIG.4-TYPICAL REVERSE CHARACTERISTICS

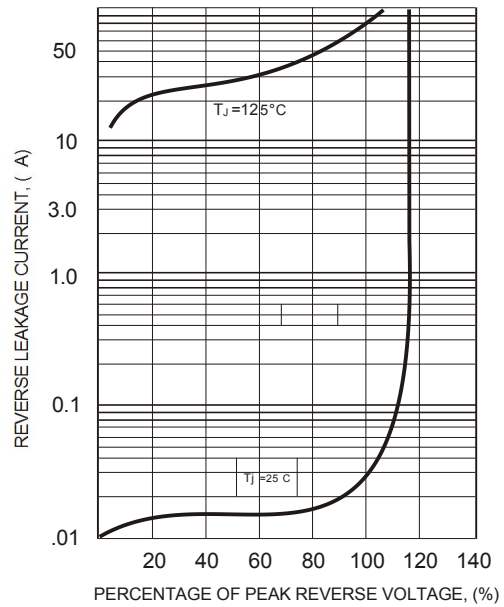

单击下面可查看定价，库存，交付和生命周期等信息

[>>FOSAN\(富信\)](#)