Engineer Drawing

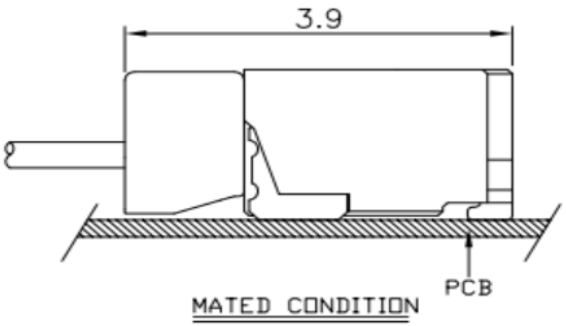

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING:PA66/PA46, 94V-0
1-2.TERMINAL:PHOSPHOR BRONZE AWG #32-#34
2.PLATING SPECIFICATION:
2-1.TREMINAL:
TIN OR AU PLATED ON CONTACT AREA.
3.MECHANICAL PERFORMANCE:
3-1.RETENTION FORCE: 0.3kgf/PIN MIN
3-2.DURABILITY: 50 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1. RATED CURRENT : 0.5A
RATED VOLTAGE : 30V AC
4-2.INSULATION RESISTANCE: 100MΩ MIN
4-3.CONTACT RESISTANCE :30mΩ MAX
4-4.WITHSTANDING VOLTAGE: 200V AC
5.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
6.PACKAGE SPEC: TUBE

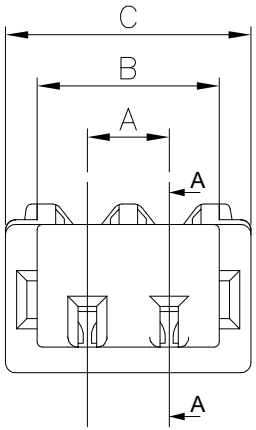

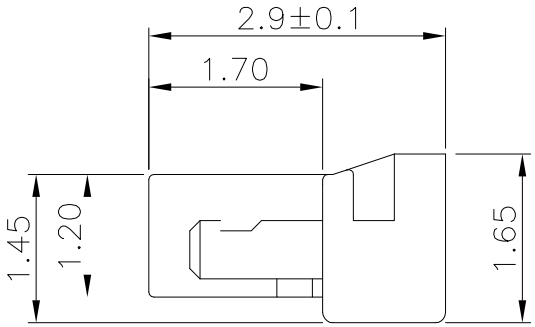



IPCW080H ** * * * * *
① ② ③ ④ ⑤ ⑥ ⑦

① Series Type
② Pin code.
③ Material code
④ Appereace code
⑤ Ineral code
⑥ Company code.
⑥ Other code.



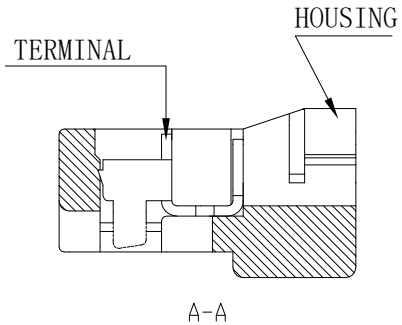

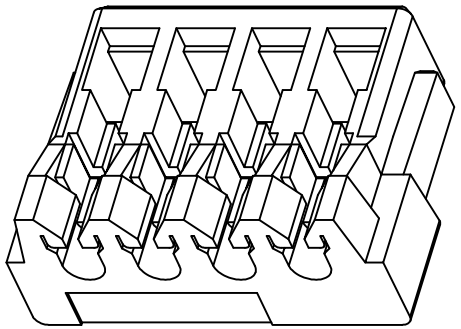

PART NO.	Dimension mm A	B	C	PART NO.	Dimension mm A	B	C
02	0.80	1.78	2.40	13	9.60	10.58	11.20
03	1.60	2.58	3.20	14	10.40	11.38	12.00
04	2.40	3.38	4.00	15	11.20	12.18	12.80
05	3.20	4.18	4.80	16	12.00	12.98	13.60
06	4.00	4.98	5.60	17	12.80	13.78	14.40
07	4.80	5.78	6.40	18	13.60	14.58	15.20
08	5.60	6.58	7.20	19	14.40	15.38	16.00
09	6.40	7.38	8.00	20	15.20	16.18	16.80
10	7.20	8.18	8.80	21	16.00	16.98	17.60
11	8.00	8.98	9.60	22	16.80	17.78	18.40
12	8.80	9.78	10.40				

TOLERANCE
.X ± 0.35
.XX ± 0.25
.XXX ± 0.0
ANGLES ±6°

UNLESS OTHERWISE SPECIFIED

iNCP

www.i-ncp.com

PART NO.
IPCW080H xx

DRAWING NO.
IPCW080H06

TITLE:
Pitch0.8mm SUR
HOUSING 刺破式 无耳

SHEET 1 OF 1 | UNITS mm | SCALE 1:1 | REV. 01

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>INCP

Downloaded From Oneyac.com