


T252D157K020MS7200

Aliases (M39003/06-0061TR{KEM}, CSR33E157KM7200)

T252 CSR33, Tantalum, MnO2 Tantalum, Military/High Reliability, 150 uF, 10%, 20 VDC, 500 mOhms

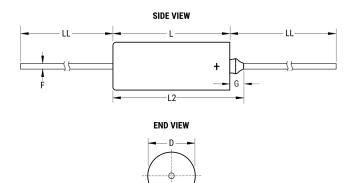

Click here for the 3D model.

Dimensions	
D	8.92mm +/-0.25mm
L	19.96mm +/-0.79mm
L2	23.42mm
LL	38.1mm +/-6.35mm
F	0.64mm +/-0.05mm
G	3.46mm +0.79mm

Packaging Specifications

Packaging Packaging Quantity T&R, 305mm, Class III, B = 73mm 400

General Information		
Series	T252 CSR33	
Dielectric	MnO2 Tantalum	
Style	Axial Hermetic	
Description	Axial, Solid Tantalum, Hermetically Sealed, Military, CSR33 Style	
Features	Extended Capacitance, Low Leakage	
RoHS	No	
Prop 65	WARNING: Cancer and reproductive harm - http://www.p65warnings.ca.gov.	
SCIP Number	bee1eed4-5fec-4214-9f43-620c5b22071f	
Termination	Lead (SnPb)	
Lead	Wire Leads	
Qualifications	MIL-PRF-39003, CSR33	
AEC-Q200	No	
Construction	Hermetic	
Notes	Dimensions Include Insulating Sleeve. Lead Length Shown Is For Parts Supplied With Bulk Packaging, When Supplied On T&R Or Ammo, Lead Length Is Determined By Taping Specification.	

Specifications	
Capacitance	150 uF
Capacitance Tolerance	10%
Voltage DC	20 VDC (85C), 16 VDC (125C Surge), 0.2 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	8%
Failure Rate	M (1%/1000 Hrs)
Resistance	0.5 Ohms (100kHz)
Ripple Current	600 mAmps (100kHz)
Leakage Current	2 uA
Testing and Reliability	Standard Testing To MIL-PRF-39003

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价,库存,交付和生命周期等信息

>>KEMET(基美)