


VG, Varistors, ESD Suppresion, 18 V, 14 VAC, 25 V, 50 V, 2 A, 50 mJ, 3000 uW



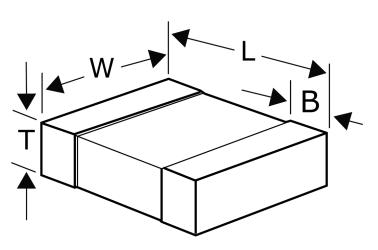

Click here for the 3D model.

Dimensions	
Chip Size	0603
L	1.6mm +/-0.2mm
W	0.8mm +/-0.1mm
Т	0.95mm MAX
В	0.5mm +/-0.25mm

Packaging Specifications	
Packaging	T&R
Packaging Quantity	4000

General Information		
Series	VG	
Type	Varistors	
Style	SMD Chip	
Description	Surface Mount Varistors	
Features	ESD Suppresion	
Termination	Nickel Tin	
RoHS	Yes	
Qualifications	IEC, UL, AEC-Q200	
AEC-Q200	Yes	

Specifications	
Voltage DC	18 VDC (25C)
Voltage AC	14 VAC
Temperature Range	-55/+125°C
Storage Temperature Range	-55/+150°C
Varistor Voltage	25 VDC at 1 mA
Clamping Voltage	50 V
Clamping Current	2 A (8/20 us MAX)
Energy	0.05 J (10/1000 us MAX)
Capacitance	75 pf (1kHz)

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价,库存,交付和生命周期等信息

>>KEMET(基美)