


VE2220K801R060

General Information

VE, Varistors, Low Voltage High Temperature, 85 V, 60 VAC, 100 V, 167 V, 10 A, 800 A, 6.2 J, 20 mW

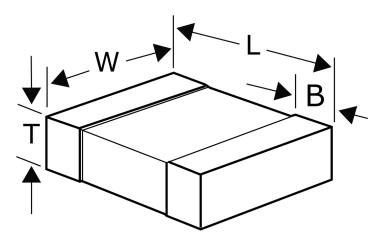

Series VE Туре Varistors Style SMD Chip Description Surface Mount Varistors Features Low Voltage High Temperature Termination Nickel Tin RoHS Yes Qualifications IEC, UL, AEC-Q200 AEC-Q200 Yes

Specifications	,
Voltage DC	85 VDC (25C)
Voltage AC	60 VAC
Temperature Range	-55/+150°C
Storage Temperature Range	-55/+150°C
Varistor Voltage	100 VDC at 1 mA
Clamping Voltage	167 V
Clamping Current	10 A (8/20 us MAX)
Surge Current	800 A (8/20 us MAX)
Energy	6.2 J (10/1000 us MAX)
Capacitance	1000 pF (1kHz)

Click here for the 3D model.

Dimensions	
Chip Size	2220
L	5.7mm +/-0.5mm
W	5mm +/-0.4mm
Т	1.85mm MAX
В	0.5mm +/-0.25mm

Packaging Specifications

5 5 1	
Packaging	T&R
Packaging Quantity	1000

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价,库存,交付和生命周期等信息

>>KEMET(基美)