


KEMET Part Number: PME261KB5330KR19T0
(P561QE333K220L)

PME261/P561, Film, Metallized Paper, General Purpose, 0.033 uF, 10%, 400 VDC, 85°C, Lead Spacing = 15.2mm

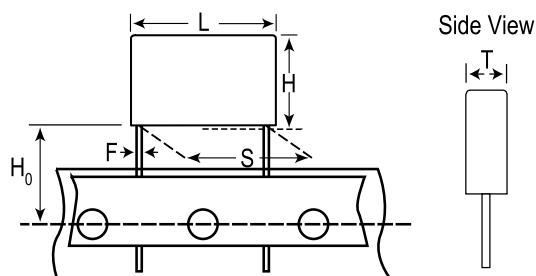

General Information	
Series:	PME261/P561
Dielectric:	Metallized Paper
Style:	Radial
Features:	Pulse in DC and low frequency applications
RoHS:	Yes
Lead:	Wire Leads
AEC-Q200:	No
Construction:	Molded
Miscellaneous:	AC Operation: 70C MAX.

Dimensions	
L	18.5mm -0.5mm
H	10.5mm -0.5mm
T	5.2mm -0.5mm
S	15.2mm +0.6/-0.1mm
H0	18.5mm +/-0.5mm
F	0.8mm +/-0.05mm

Specifications	
Capacitance:	0.033 uF
Capacitance Tolerance:	10%
Voltage AC:	220 VAC
Voltage DC:	400 VDC
Temperature Range:	-40/+100°C
Rated Temperature:	85°C
Dissipation Factor:	1.3% 1kHz
Insulation Resistance:	12 GOhms
Max dV/dt:	1600 V/us

Packaging Specifications	
Packaging:	T&R
Packaging Quantity:	600

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)