


# KL101X PHOTO TRANSISTOR

## LSOP4 晶体管光耦

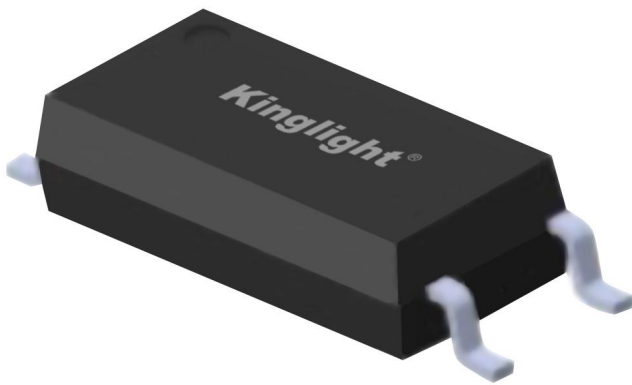

\* 本文档中包含的信息反映了具有代表性的使用场景，仅供技术参考。

The information contained in this document reflects representative usage scenarios and is intended for technical reference only.

\* 本文档中提到的产品型号和规格如有更改或改进，恕不另行通知。在生产使用之前，客户应参考产品规格书的最新数据表。

Product models and specifications mentioned in this document are subject to change or improvement without notice. Customers should refer to the latest data sheets in the product specifications prior to production use.

\* 在使用本文档中引用的产品时，请确保产品在数据手册中规定的环境和电气限制范围内运行。如果客户使用超过指定的限制，晶台将不会对任何后续问题负责。

When using the products referenced in this document, ensure that the products are operated within the environmental and electrical limits specified in the data sheet. If the customer uses the product beyond the specified limits, Kinglight will not be responsible for any subsequent problems.

\* 本文档中的信息适用于电子元器件应用中的典型用法。如有任何特殊用途，请向晶台咨询，以获得进一步的帮助。

The information in this document applies to typical use in electronic component applications. For special applications, please contact Kinglight for further assistance.

\* 未经晶台允许，不得复制或转载本文件的内容和信息。对于最新的信息，请参考官方网站 [Http://www.kinglight-OC.com](http://www.kinglight-OC.com)。

The contents and information in this document may not be copied or reproduced without the permission of Kinglight. For the latest information, please visit the official website [Http://www.kinglight-OC.com](http://www.kinglight-OC.com).

## 1. 产品特点 Product features

- 电流转换率(Current transfer ratio)  
CTR: 50~600% at  $I_F = 5\text{mA}$ ,  $V_{ce} = 5\text{V}$   
CTR: 63-320% at  $I_F = 10\text{mA}$ ,  $V_{ce} = 5\text{V}$
- 输入与输出高隔离电压( $V_{iso} = 5000\text{ V rms}$ )  
High isolation voltage between inputs and output ( $V_{iso} = 5000\text{ V rms}$ )
- 8mm长爬电距离 8mm long creepage distance
- 紧凑型4引脚LSOP外形尺寸为2.1mm Compact 4 Pin LSOP with a 2.1 mm profile
- 不含卤素(溴<900ppm, 氯<900ppm, 溴+氯<1500ppm)  
Halogen free (Br < 900ppm, Cl < 900ppm, Br+Cl < 1500ppm)
- 符合欧盟REACH法规 Compliance with EU REACH
- 无Pb且符合ROHS标准 Pb free and compliant with RoHS standards
- 安全审批 Safety approval  
CQC认证已批准(编号:CQC23001407998) CQC approved (No.CQC23001407998)  
UL认证已批准 (编号:UL-CA-2340753-0) UL approved (No.UL-CA-2340753-0)


## 2. 产品描述 Product Description

- KL101X系列由一个红外发射二极管,光耦合到一个光电晶体管构成光电耦合器  
KL101X series contains an infrared emitting diode, optically coupled to a phototransistor detector.
- 它们封装在4引脚LSOP封装中  
They are packaged in a 4-pin LSOP package

## 3. 产品应用 Product Applications

- 家用电器, 如电风扇加热器等 Home appliances, such as fan heaters, etc.
- 可编程控制器 Programmable controllers
- 电信设备 Telecommunication equipments
- 不同电位和阻抗电路间的信号传输  
Signal transmission between circuits of different potentials and impedances
- 测量仪器等 measuring instruments, etc

## 4. 功能图 Functional Diagram

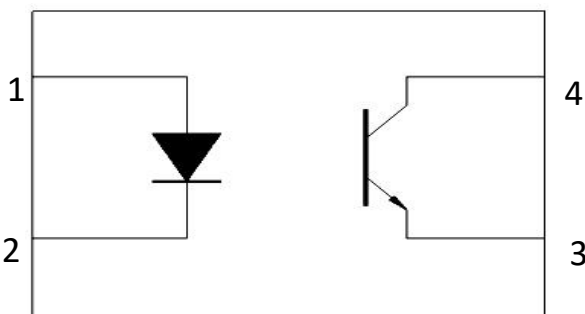

引脚配置 Pin Configuration

1. 阳极Anode
2. 阴极Cathode
3. 发射极Emitter
4. 集电极Collector

## 5. 光电特性 Electrical-Optical characteristics

• 最大限度额定值(温度=25°C) Absolute Maximum Ratings(Ta=25°C)

| 参数<br>Parameter                    |   | 符号<br>Symbol | 额定值<br>Rated Value | 单位<br>Unit |
|------------------------------------|---|--------------|--------------------|------------|
| 输入<br>Input                        | 正向电流<br>Forward current                           | $I_F$        | 60                 | mA         |
|                                    | 峰值正向电流(1us脉冲)<br>Peak forward current (1us pulse) | $I_{FP}$     | 1.5                | A          |
|                                    | 反向电压<br>Reverse voltage                           | $V_R$        | 6                  | V          |
|                                    | 输入功耗<br>Input Power dissipation                   | $P_D$        | 100                | mW         |
| 输出<br>Output                       | 集电极电流<br>Collector current                        | $I_C$        | 50                 | mA         |
|                                    | 集电极与发射极间电压<br>Collector and emitter Voltage       | $V_{CEO}$    | 80                 | V          |
|                                    | 发射极与集电极间电压<br>Emitter and Collector Voltage       | $V_{ECO}$    | 7                  | V          |
|                                    | 输出功耗<br>Output Power dissipation                  | $P_C$        | 150                | mW         |
| 总消耗功率<br>Total Consume Power       |   | $P_{TOT}$    | 250                | mW         |
| 隔离电压 (1*)<br>Isolation Voltage     |   | $V_{iso}$    | 5000               | Vrms       |
| 工作温度<br>Operating temperature      |   | $T_{OPR}$    | -55 to +110        | °C         |
| 储存温度<br>Storage temperature        |   | $T_{STG}$    | -55 to +125        | °C         |
| 焊接温度 (2*)<br>Soldering temperature |   | $T_{SOL}$    | 260                | °C         |

附注(Notes):

1\* 交流电源1分钟内, 相对湿度40~60%环境下, 隔离电压测试方法, 引脚1&2短接在一起, 引脚3&4短接在一起  
AC for 1 minute, 40~60%RH in this test, Pin 1,2 are shorted together, and 3,4 are shorted together

2\* 焊接时间为10秒 Soldering time is 10 seconds

## 6. 电气特性(Ta=25°C,除非另有规定)

## Electrical Characteristics(Ta=25°C unless specified otherwise)

| 参数<br>Parameter                  |  | 符号<br>Symbol  | 最小值<br>Min.        | 规格值<br>Typ. | 最大值<br>Max. | 单位<br>Unit | 条件<br>Condition                               |
|----------------------------------|--|---------------|--------------------|-------------|-------------|------------|---|
| 输入<br>In put                     | 正向电压<br>Forward voltage                              | $V_F$         | -                  | 1.45        | 1.5         | V          | $I_F=50mA$                                    |
|                                  | 反向电流<br>Reverse current                              | $I_R$         | -                  | -           | 10          | $\mu A$    | $V_R=6V$                                      |
|                                  | 输入电容<br>Input capacitance                            | $C_{in}$      | -                  | 50          | -           | pF         | $V=0, f=1kHz$                                 |
| 输出<br>Out put                    | 集电极与发射极间暗电流<br>Collector-Emitter dark current        | $I_{CEO}$     | -                  | -           | 100         | nA         | $V_{CE}=20V$<br>$I_F=0mA$                     |
|                                  | 集电极与发射极间击穿电压<br>Collector-Emitter breakdown voltage  | $V_{CEO}$     | 80                 | -           | -           | V          | $I_C=0.1mA$<br>$I_F=0mA$                      |
|                                  | 发射极与集电极间击穿电压<br>Emitter-Collector breakdown voltage  | $V_{ECO}$     | 7                  | -           | -           | V          | $I_E=0.1mA$<br>$I_F=0mA$                      |
| 传输特性<br>Transfer Characteristics | 集电极与发射极间饱和电压<br>Collector-Emitter saturation voltage | $V_{CE(sat)}$ | -                  | -           | 0.3         | V          | $I_F=10mA$<br>$I_C=1mA$                       |
|                                  | 隔离电阻<br>Isolation resistance                         | $R_{ISO}$     | $5 \times 10^{10}$ | -           | -           | $\Omega$   | $V_{IO}=500Vdc$<br>40~60% R.H.                |
|                                  | 浮动电容<br>Floating capacitance                         | $C_f$         | -                  | -           | 1.0         | pF         | $V_{IO}=0, f=1MHz$                            |
|                                  | 上升时间<br>Rise time                                    | $t_r$         | -                  | -           | 18          | $\mu s$    | $V_{CE}=5V,$<br>$I_C=5mA,$<br>$R_L=100\Omega$ |
|                                  | 下降时间<br>Fall time                                    | $t_f$         | -                  | -           | 18          | $\mu s$    |   |
|                                  | 开启时间<br>Turn on time                                 | $T_{on}$      | -                  | 4           | -           | $\mu s$    | $V_{CE}=5V,$<br>$I_C=5mA,$<br>$R_L=100\Omega$ |
|                                  | 关闭时间<br>Turn off time                                | $T_{off}$     | -                  | 3           | -           | $\mu s$    |   |

- 温度 $T_a=25^{\circ}\text{C}$ 下规格值 Typical values at  $T_a = 25^{\circ}\text{C}$

Transfer Characteristics level table ( $T_a=25^{\circ}\text{C}$  unless specified otherwise)

| 参数<br>Parameter                   |        | 符号<br>Symbol | 最小值<br>Min. | 规格值<br>Typ. | 最大值<br>Max. | 单位<br>Unit | 条件<br>Condition                         |
|-----------------------------------|--------|--------------|-------------|-------------|-------------|------------|---|
| 电流传输比<br>Current<br>Transferratio | KL1010 | CTR          | 50          | -           | 600         | %          | $I_F=5\text{mA}$<br>$V_{CE}=5\text{V}$  |
|                                   | KL1017 |              | 80          | -           | 160         |            |   |
|                                   | KL1018 |              | 130         | -           | 260         |            |   |
|                                   | KL1019 |              | 200         | -           | 400         |            |   |
|                                   | KL1012 | CTR          | 63          | -           | 125         | %          | $I_F=10\text{mA}$<br>$V_{CE}=5\text{V}$ |
|                                   | KL1013 |              | 100         | -           | 200         |            |   |
|                                   | KL1014 |              | 160         | -           | 320         |            |   |
|                                   | KL1012 |              | 22          | -           | -           |            | $I_F=1\text{mA}$<br>$V_{CE}=5\text{V}$  |
|                                   | KL1013 |              | 34          | -           | -           |            |   |
|                                   | KL1014 |              | 56          | -           | -           |            |   |

## 7. 可靠性试验 Reliability Test

| 序号<br>NO.     | 试验项目<br>Test Items   | 参考标准<br>Reference | 试验条件<br>Test conditions                                       | 试验过程<br>Test process | 试验数<br>Qty.(pcs) | 允收水准<br>LTPD |
|---------------|--|-------------------|---|----------------------|------------------|--------------|
| 1             | 温度循环<br>TC   | JESD22-A104C      | H:125±5°C 15min<br>J5min<br>L:-55±5°C 15min                   | 300cycle             | 45               | 0/45         |
| 2             | 高温操作寿命<br>HTOL   | JESD22-A108C      | HTOL@110±5°C<br>I <sub>F</sub> =10mA、<br>I <sub>C</sub> =10mA | 168、500、<br>1000hrs  | 45               | 0/45         |
| 3             | 高温反向偏压<br>HTRB   | JESD22-A108C      | HTRB@125±5°C<br>V <sub>ce</sub> =60V                          | 168、500、<br>1000hrs  | 45               | 0/45         |
| 4             | 温湿度反向偏<br>压寿命试验<br>H3TRB   | JESD22-A101-B     | H3TRB@ 85±5°C、<br>85±5%RH<br>V <sub>ce</sub> =60V             | 168、500、<br>1000hrs  | 45               | 0/45         |
| 5             | 压力锅<br>Autoclave   | JESD22-A102-C     | T <sub>a</sub> =121±5°C,<br>100±5%RH, 2atm                    | 96hrs                | 45               | 0/45         |
| 6             | 高温储存<br>HTS  | JESD22-A103C      | HTS@125±5°C   | 168、500、<br>1000hrs  | 45               | 0/45         |
| 7             | 低温储存<br>LTS  | JESD22-A119       | LTS@-55±5°C   | 168、500、<br>1000hrs  | 45               | 0/45         |
| 8             | 耐锡热试验<br>RSH   | JESD22-B106C      | RSH@260±5°C   | 10sec*3times         | 45               | 0/45         |
| 9             | 可焊性<br>SD  | JESD22-B102D      | Pb-free@<br>245±5°C   | 3sec*1times          | 22               | 0/22         |
| 备注<br>Remarks | 以上试验项目如与客户试验要求存在差异或者特殊客户特殊要求的,可根据实际情况按照客户的要求进行试<br>作,客户未要求依我司试验标准试作,不同产品使用不同电流进行测试<br>All the tests should be performed according to customers' actual requirements, while difference<br>of test standard or special requirements exist. Otherwise, all the tests are performed according to<br>the standard listed above. Different current is applied to the tests of different product models |                   |   |                      |                  |              |

## 8. 特性曲线 Characteristic Curves

图1. 正向电流与正向电压的关系  
Figure1. Forward Current VS Forward Voltage

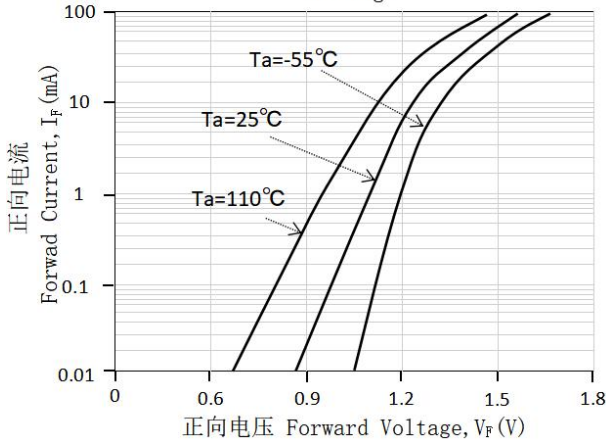


图2. 集电极暗电流与环境温度的关系  
Collector Dark Current vs Ambient Temperature

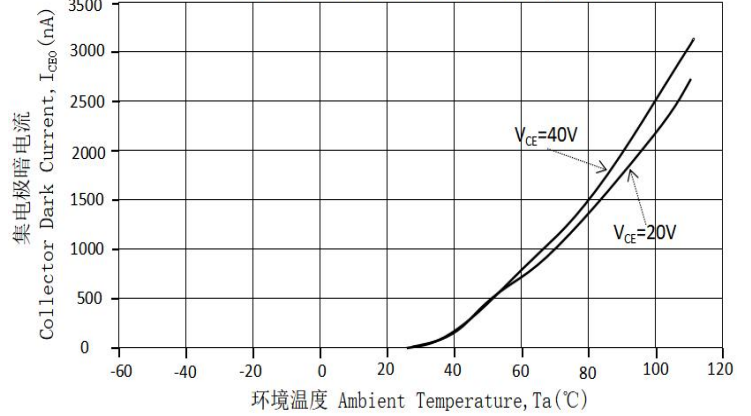


图3. 集电极电流与正向电流的关系  
Figure1. Forward Current VS Forward Voltage

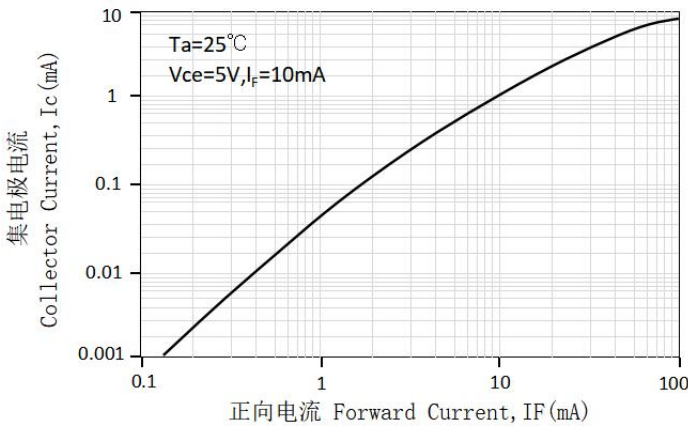


图4. 电流传输比与正向电流  
Current Transfer Ratio vs Forward Current

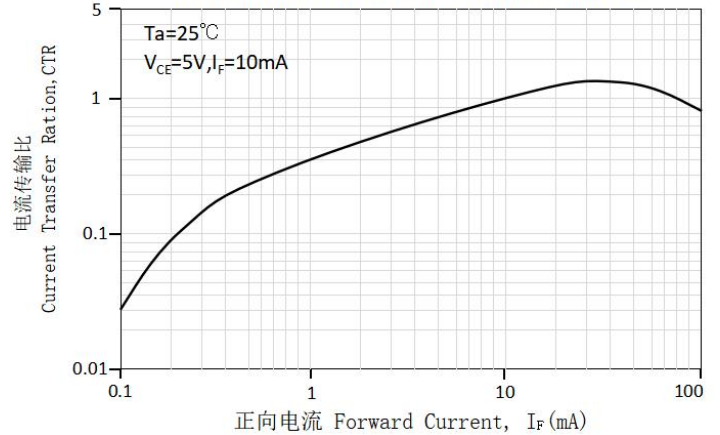


图5. 集电极电流与集电极-发射极电压  
Collector Current vs Collector-Emitter Voltage

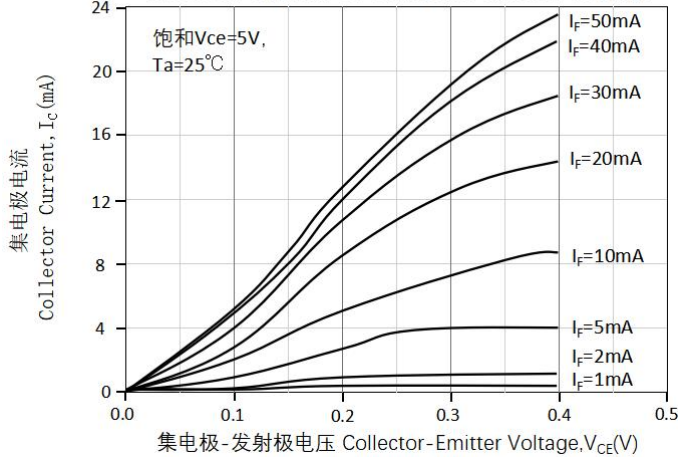


图6. 集电极电流与集电极-发射极电压  
Collector Current vs Collector-Emitter Voltage

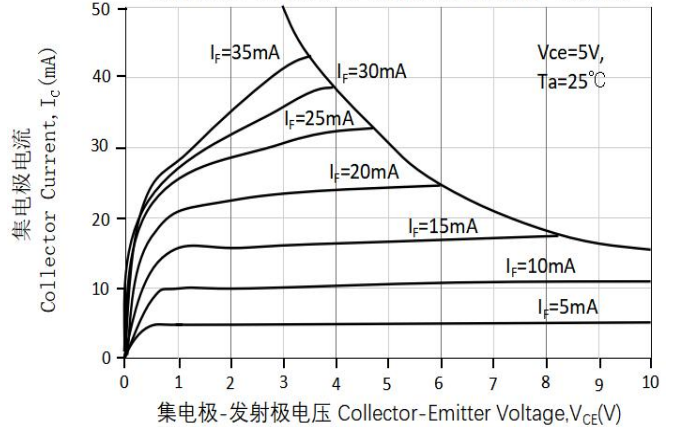




图7. 电流传输比与环境温度关系

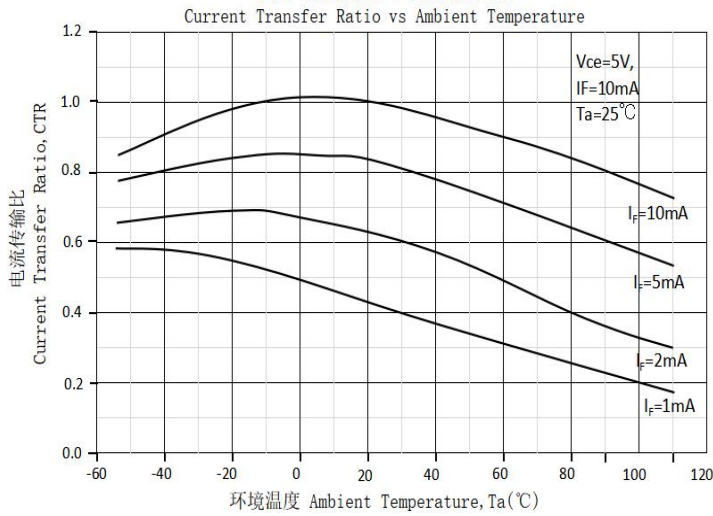


图8. 电流传输比与环境温度关系

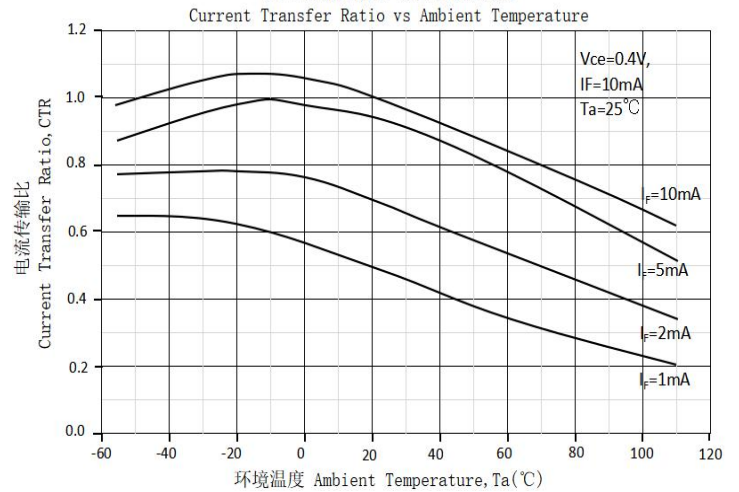


图9. 开启时间/关闭时间 vs 集电极电流

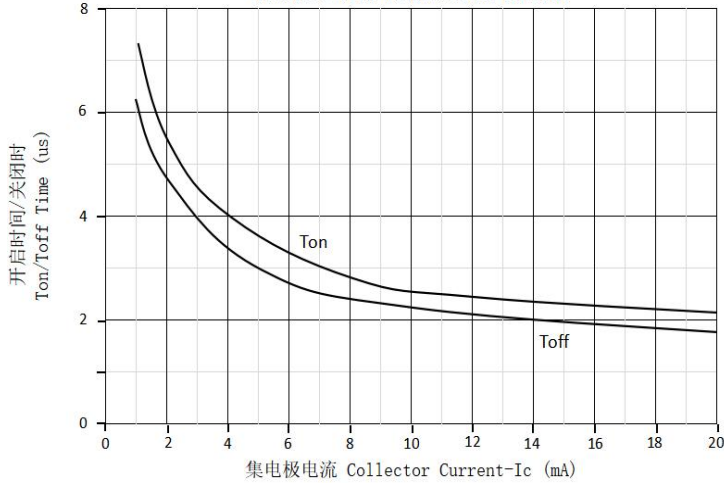


图10. 开启/关闭时间与正向电流的关系


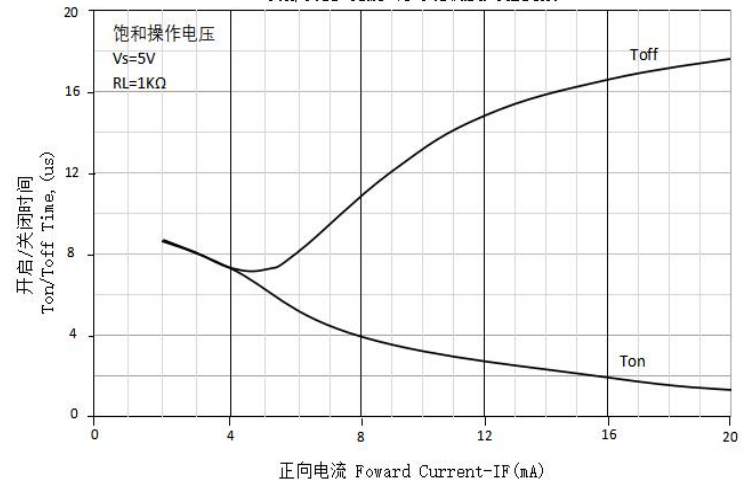


图11. 开关时间测试电路与波形



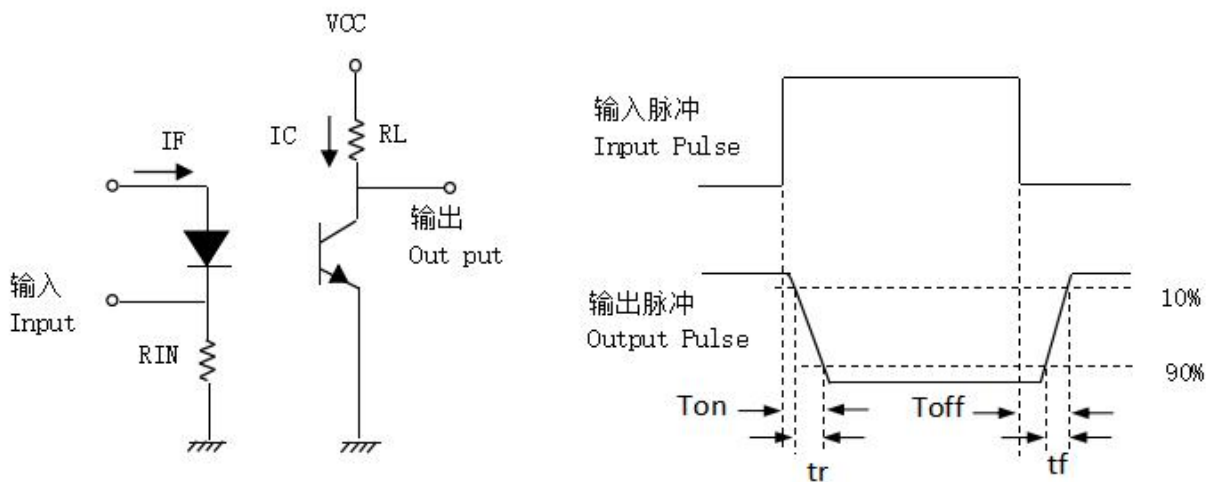

## 9. 订单信息 Order Information

- 材料编号 Part Number

**KL101X (Y)-V**

**(料号PN:KL101X-Y-V)**

### 附注(Notes):

KL101 = 材料编号 Part No.

X = 表示CTR等级(0、2、3、4、7、8或9)  
CTR Rank (0, 2, 3, 4, 7, 8 or 9)

Y = 载带和卷轴包装方式(TA、TB或无)  
Tape and reel option (TA, TB or none)


V = 表示VDE标识(客户指定镭射字符才加"V")  
VDE (Only add "V" to laser characters specified by the customer)

| 选项<br>Option | 描述<br>Description                              | 包装数量<br>Packing quantity           |
|--------------|--|------------------------------------|
| (TA)         | TA载带和卷轴选项<br>TA Tape & reel option             | 每卷3000pcs<br>3000 units per tube   |
| (TB)         | TB载带和卷轴选项<br>TB Tape & reel option             | 每卷3000pcs<br>3000 units per tube   |
| (TA)-V       | TA载带和卷轴选项 +VDE<br>TA Tape & reel option + VDE  | 每卷3000pcs<br>3000 units per reel   |
| (TB)-V       | TB载带和卷轴选项 + VDE<br>TB Tape & reel option + VDE | 每卷3000pcs<br>3000 units per reel   |
| /            | 内盒装: 每盒3盘<br>Inner box packaging: 3reels/box   | 每盒9000pcs<br>9000pcs per box       |
| /            | 每箱装:10个内盒<br>Pack per Carton:10 inner boxes    | 每箱90000pcs<br>90000pccs per Carton |


### 10. 封装尺寸(单位:毫米) Package Drawing(Unit:mm)

- 包装尺寸 (尺寸单位为mm)

Package Dimension (Dimensions in mm)

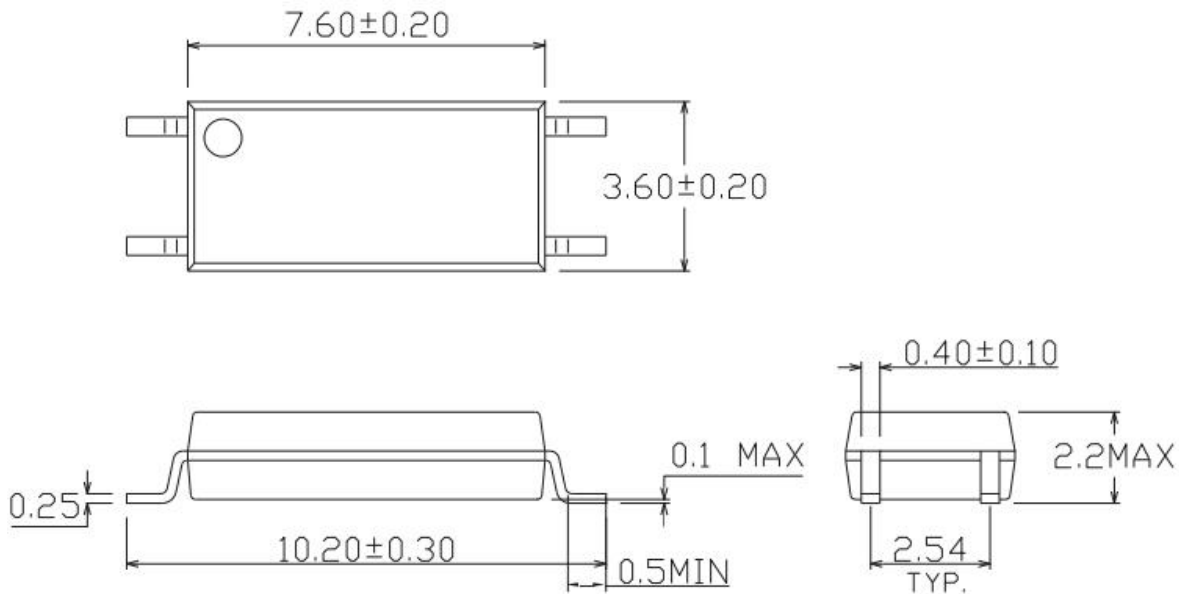


- 表面贴片类型PIN脚焊盘布局 Surface patch type PIN foot pad layout

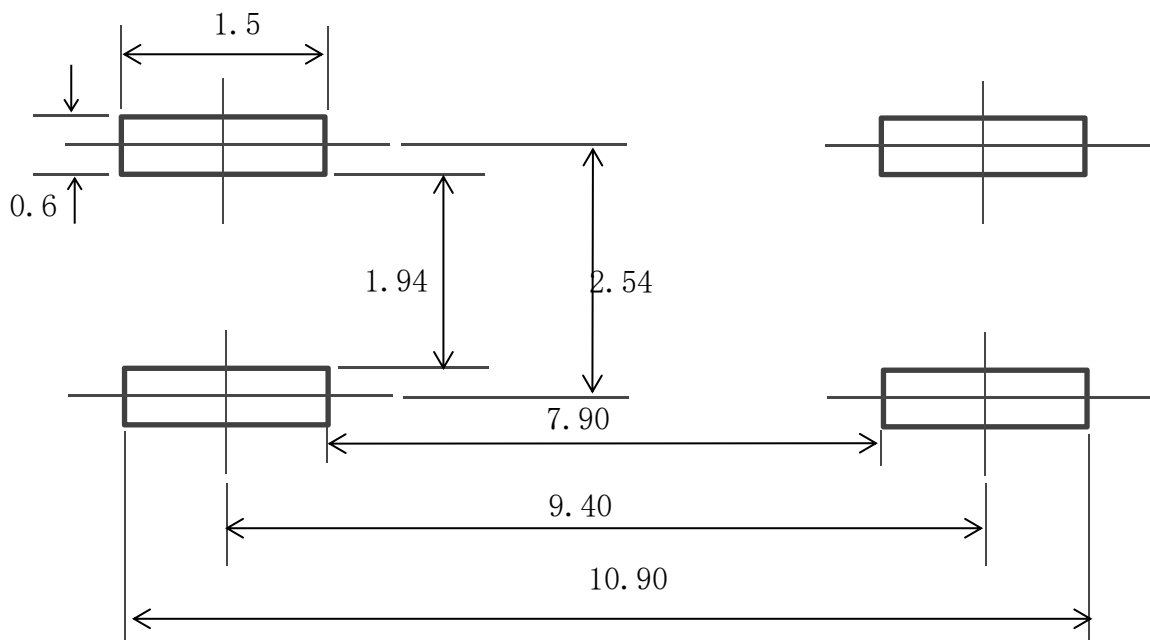

**附注(Notes):**

- 推荐焊盘尺寸仅供参考 Suggested pad dimension is just for reference only
- 请根据个人需求修改焊盘尺寸 Please modify the pad dimension based on individual need

## 11. 设备标记 Device marking

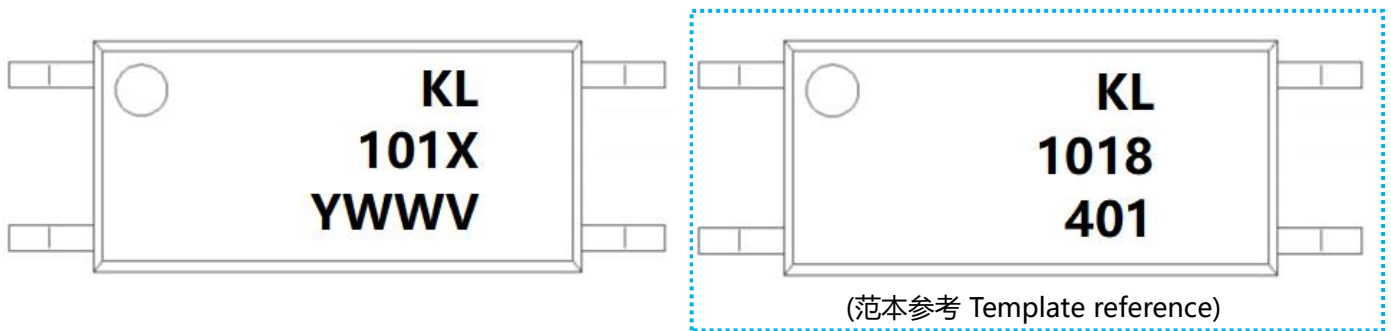


### 附注(Notes):

- KL = 表示晶台光电有限公司 Denotes KingLight
- 101X =表示材料部件号 Denotes Device Part Number  
X 表示CTR等级(0、2、3、4、7、8 或 9) CTR Rank (0, 2, 3, 4, 7, 8 or 9)
- Y =表示1位年份代码 Denotes 1 digit Year code
- WW =表示2位周别代码 Denotes 2 digit Week code
- V =表示VDE标识(客户指定镭射字符才加"V")  
VDE (Only add "V" to laser characters specified by the customer)


## 12. 料带和卷轴包装规格 Tape & Reel Packing Specifications

• 选择TA Option TA

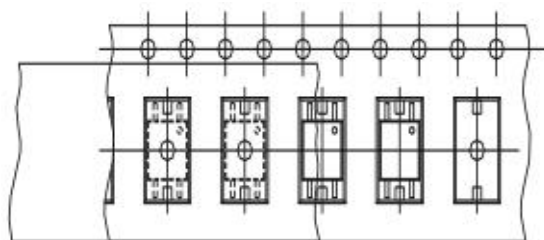


卷轴进给方向 Direction of feed from reel

• 选择TB Option TB

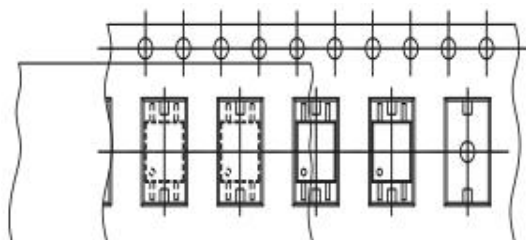

卷轴进给方向 Direction of feed from reel

### 料带尺寸 Material belt size

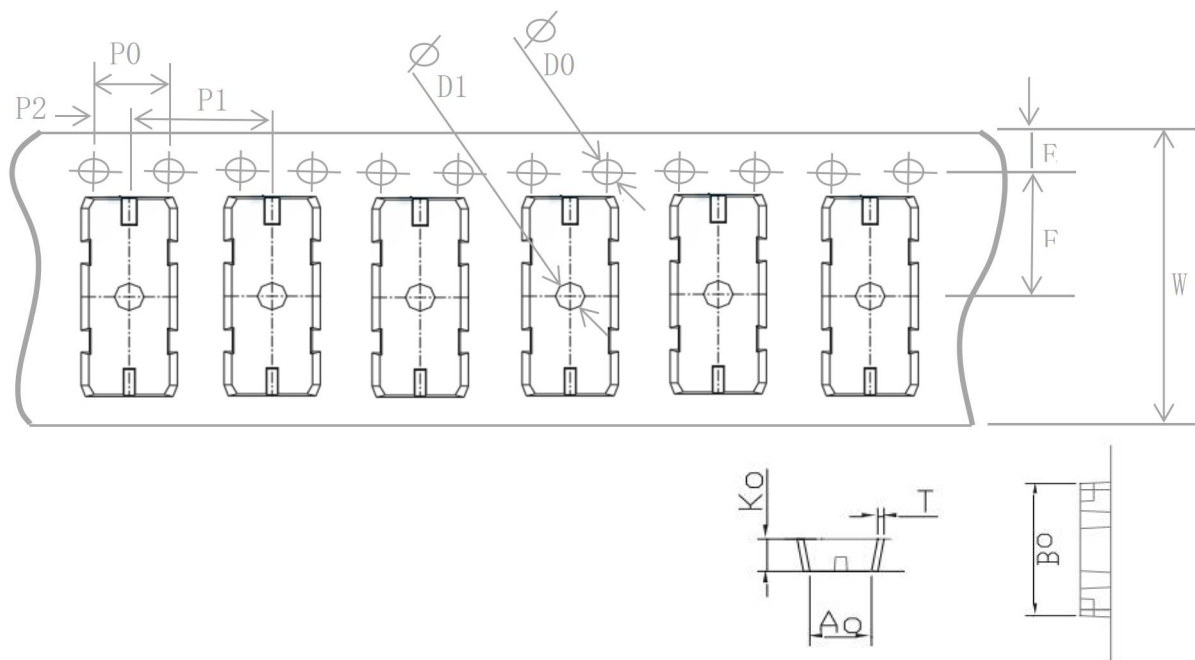


|                         |         |           |         |          |          |          |
|-------------------------|---------|-----------|---------|----------|----------|----------|
| 尺寸编号<br>Dimension No.   | A0      | B0        | D0      | D1       | E        | F        |
| 尺寸(mm)<br>Dimension(mm) | 3.9±0.1 | 10.82±0.1 | 1.5±0.1 | 1.5±0.1  | 1.75±0.1 | 7.5±0.1  |
| 尺寸编号<br>Dimension No.   | P0      | P1        | P2      | T        | W        | K0       |
| 尺寸(mm)<br>Dimension(mm) | 4.0±0.1 | 8.0±0.1   | 2.0±0.1 | 0.4±0.05 | 16.0±0.3 | 2.25±0.1 |

### 13. 焊接温度曲线 Temperature Profile Of Soldering

#### • 回流焊温度曲线 Reflow soldering

建议在下面所示的温度和时间分布条件下, 进行一次回流焊作业, 不得超过三次

One time soldering reflow is recommended within the condition of temperature and time profile shown below. Do not solder more than three times.

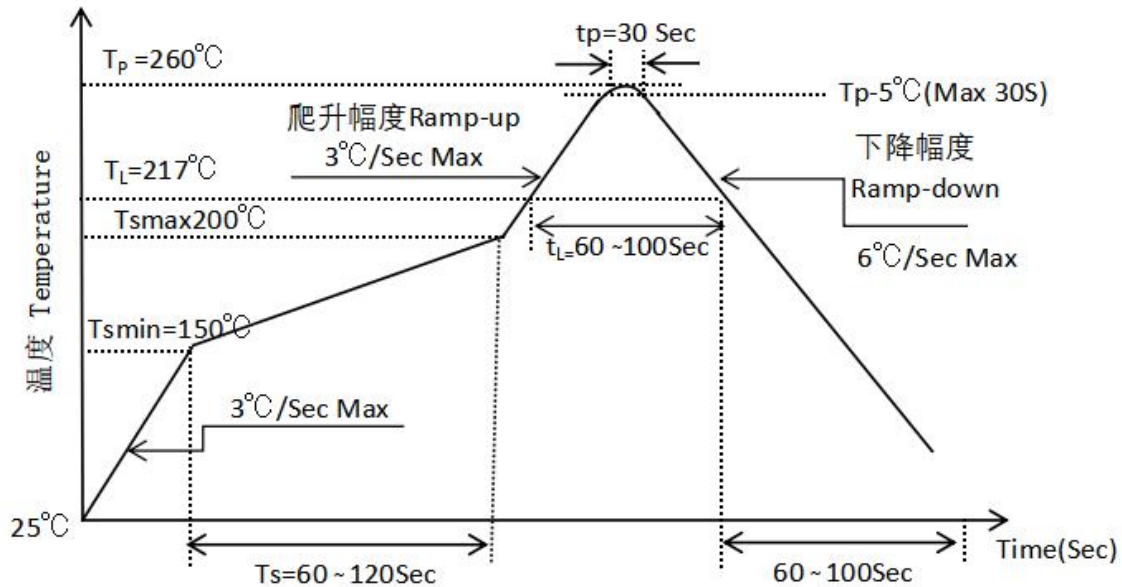

| 项目<br>Item  | 符号<br>Symbol | 最小值<br>Min. | 最大值<br>Max. | 单位<br>Unit |
|---|--------------|-------------|-------------|------------|
| 预热温度<br>Preheat Temperature   | $T_s$        | 150         | 200         | °C         |
| 预热时间<br>Preheat Time  | $t_s$        | 60          | 120         | s          |
| 升温速率<br>Ramp-Up Rate ( $T_L$ to $T_p$ )   | -            | -           | 3           | °C/s       |
| 液相线温度<br>Liquidus Temperature   | $T_L$        | 217         |             | °C         |
| 高于液相线温度( $T_L$ )的时间<br>Time above Liquidus Temperature $T_L$                                | $t_L$        | 60          | 100         | s          |
| 峰值温度<br>Peak Temperature  | $T_p$        | -           | 260         | °C         |
| $T_c$ 在( $T_p-5$ )和 $T_p$ 之间的时间<br>Time During Which $T_c$ Is Between ( $T_p-5$ ) and $T_p$ | $t_p$        | -           | 30          | s          |
| 降温速率<br>Ramp-down Rate( $T_p$ to $T_L$ )  | -            | -           | 6           | °C/s       |

单击下面可查看定价，库存，交付和生命周期等信息

[>>Kinglight\(晶台\)](#)