

## DESCRIPTION

KPESD5V0S1BSF a low-capacitance Transient Voltage Suppressor (TVS) designed to provide electrostatic discharge (ESD) protection for data, control or power lines. With maximum capacitance of 18pF, KPESD5V0S1BSF is designed to protect parasitic-sensitive systems against over-voltage and over-current transient events. It complies with IEC 61000-4-2 (ESD), Level 4 ( $\pm 15\text{kV}$  air,  $\pm 8\text{kV}$  contact discharge), IEC 61000-4-4 (electrical fast transient - EFT) (40A, 5/50 ns), very fast charged device model (CDM) ESD and cable discharge event (CDE) etc.

KPESD5V0S1BSF uses ultra-small DFN0603 package. Each KPESD5V0S1BSF device can protect one data line. It offers system designers flexibility to protect single data line where space is a premium concern.

## ORDERING INFORMATION

- ✧ Device: KPESD5V0S1BSF
- ✧ Package: DFN0603
- ✧ Material: Halogen free
- ✧ Packing: Tape & Reel
- ✧ Quantity per reel: 10,000pcs

## PIN CONFIGURATION



## FEATURES

- ✧ Transient protection for high-speed data lines
  - IEC 61000-4-2 (ESD)  $\pm 30\text{kV}$  (Contact)
  - $\pm 30\text{kV}$  (Air)
  - IEC 61000-4-4 (EFT) 40A (5/50 ns)
- ✧ Peak power dissipation: 96W (8/20 $\mu\text{s}$ )
- ✧ Working voltages :5V
- ✧ Ultra-small package (0.6mm $\times$ 0.3mm $\times$ 0.3mm)
- ✧ Protects one I/O line
- ✧ Low clamping voltage
- ✧ Low leakage current


## MACHANICAL DATA

- ✧ DFN0603 package
- ✧ Flammability Rating: UL 94V-0
- ✧ High temperature soldering guaranteed:
  - 260 $^{\circ}\text{C}$ /10s
- ✧ Packaging: Tape and Reel
- ✧ Reel size: 7 inch

## APPLICATIONS

- ✧ Personal digital assistants (PDA's)
- ✧ Notebooks, Desktops, and Servers
- ✧ Cell phone Handsets and Accessories
- ✧ Portable Electronics
- ✧ IOT Terminal Equipment/Device
- ✧ Smart Wearable Device

## CIRCUIT DIAGRAM









**ABSOLUTE MAXIMUM RATING**

Symbol	Parameter	Value	Units
$V_{ESD}$	ESD per IEC 61000-4-2 (Contact)	$\pm 30$	kV
	ESD per IEC 61000-4-2 (Air)	$\pm 30$	
$P_{PP}$	Peak Pulse Power (8/20 $\mu$ s)	96	W
$T_{OPT}$	Operating Temperature	-55~125	$^{\circ}$ C
$T_{STG}$	Storage Temperature	-55~150	$^{\circ}$ C


**ELECTRICAL CHARACTERISTICS ( $T_{amb}=25^{\circ}$ C)**

Symbol	Parameter	Test Condition	Min	Typ	Max	Units
$V_{RWM}$	Reverse Working Voltage				5.0	V
$V_{BR}$	Reverse Breakdown Voltage	$I_T = 1mA$	5.6			V
$I_R$	Reverse Leakage Current	$V_{RWM} = 5V$			1.0	$\mu$ A
$V_C$	Clamping Voltage	$I_{PP} = 1A, t_p = 8/20\mu s$		6.5	8.0	V
		$I_{PP} = 8A, t_p = 8/20\mu s$		10.0	12.0	V
$V_{CTLTP}$	TLP Clamping Voltage	$I_{PP} = 16A$ IEC61000-4-2 Level 4 equivalent ( $\pm 8kV$ Contact, $\pm 15kV$ Air)		9.5		V
$C_J$	Junction Capacitance	$V_R = 0V, f = 1MHz$		14.0	18.0	pF

**ELECTRICAL CHARACTERISTICS CURVE**

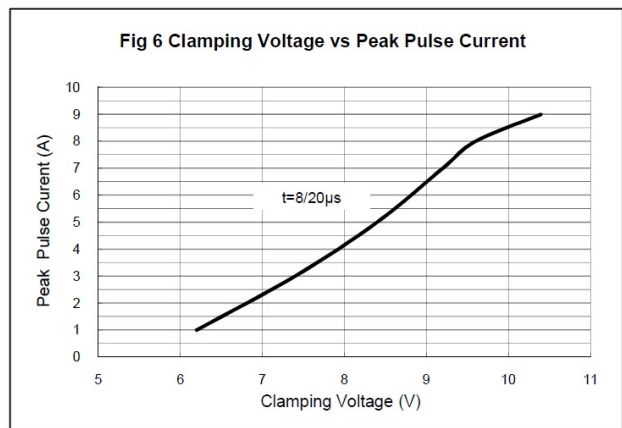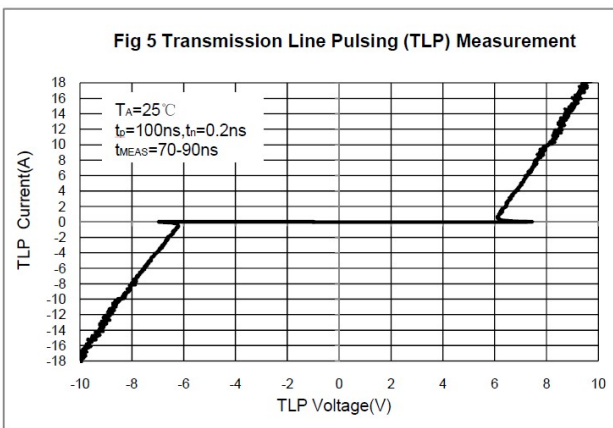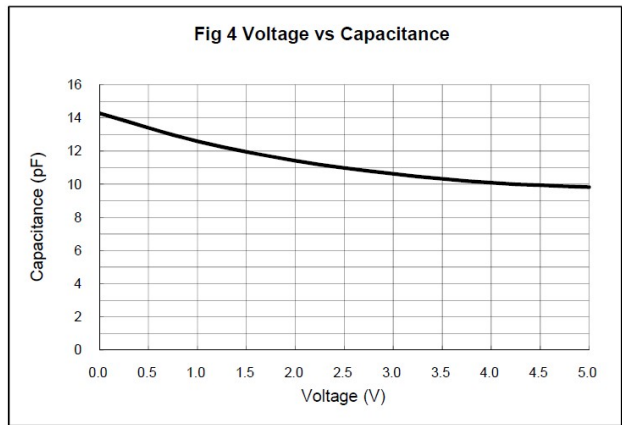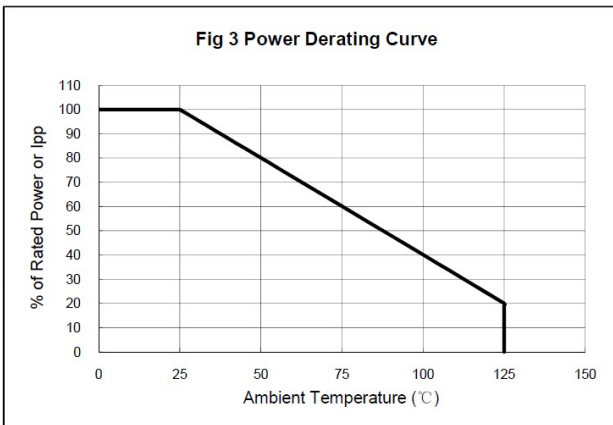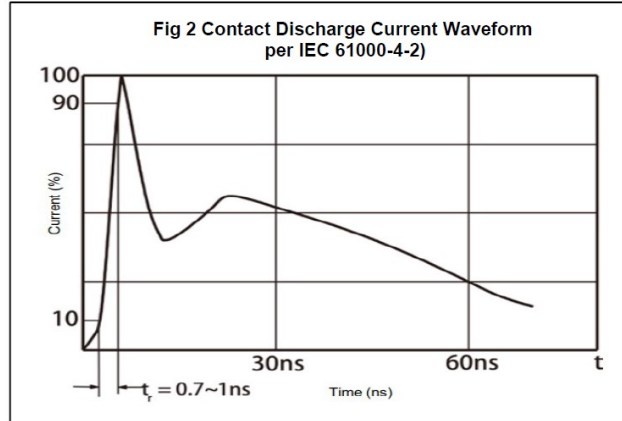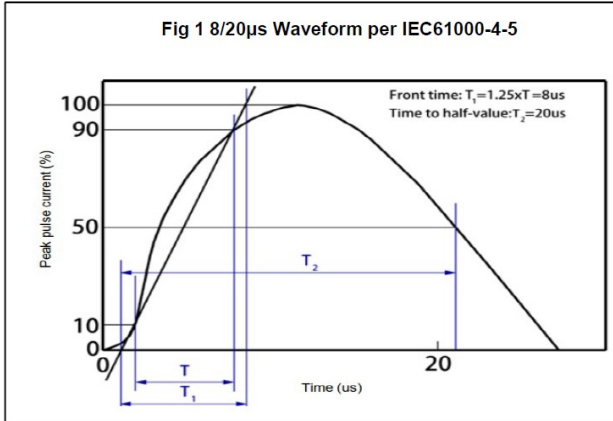

**DFN0603 PACKAGE OUTLINE DIMENSIONS**

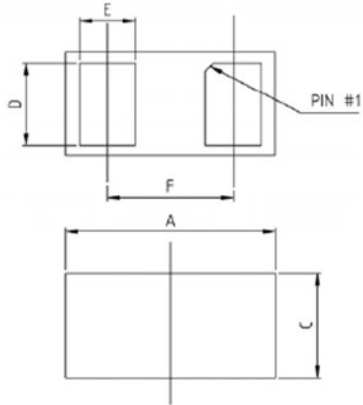

Dimensions in Millimeter			
Symbol	Min.	Typ.	Max.
A	0.58	0.60	0.65
B	0.28	0.30	0.35
C	0.28	0.30	0.34
D	0.20	0.24	0.26
E	0.13	0.16	0.19
F		0.36	

单击下面可查看定价，库存，交付和生命周期等信息

[>>KUU\(永裕泰\)](#)