



DB101S THRU DB107S

Voltage Range - 50 to 1000 V olts Current - 1.0 Ampere

SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIERS


Features

- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ High temperature soldering guaranteed: 260°/10 seconds at 5 lbs., (2.3kg) tension
- ◆ Small size, simple installation
- ◆ High surge current capability



Mechanical Data

Case : JEDEC DBS Molded plastic body
Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
Polarity : Polarity symbol marking on body
Mounting Position : Any
Weight : 0.02 ounce, 0.4 grams

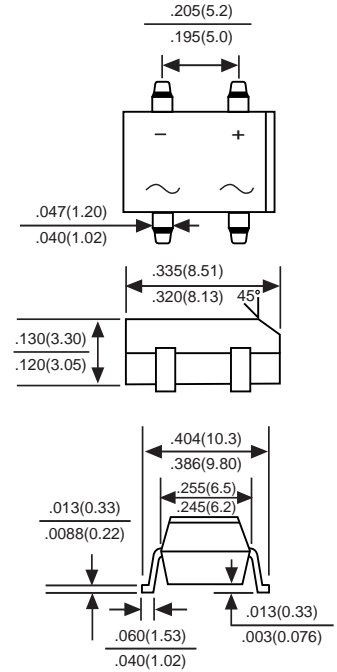

Maximum Ratings And Electrical Characteristics

Dimensions in inches and (millimeters)

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	DB101S	DB102S	DB103S	DB104S	DB105S	DB106S	DB107S	UNITS
		MDD DB101S	MDD DB102S	MDD DB103S	MDD DB104S	MDD DB105S	MDD DB106S	MDD DB107S	
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at $T_A=40^\circ\text{C}$	$I_{F(AV)}$	1.0							A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50							A
Maximum instantaneous forward voltage drop per leg at 1A	V_F	1.1							V
Maximum DC reverse current at rated DC blocking voltage	I_R	10 500							μA μA
Operating temperature range	T_J	-55 to +150							$^\circ\text{C}$
storage temperature range	T_{STG}	-55 to +150							$^\circ\text{C}$

Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.
 2. Mounted on glass epoxy PC board with 4×1.5"×1.5" (3.81×3.81 cm) copper pad.



DB101S THRU DB107S

Voltage Range - 50 to 1000 V olts Current - 1.0 Ampere

Ratings And Characteristic Curves

FIG. 1- MAXIMUM DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

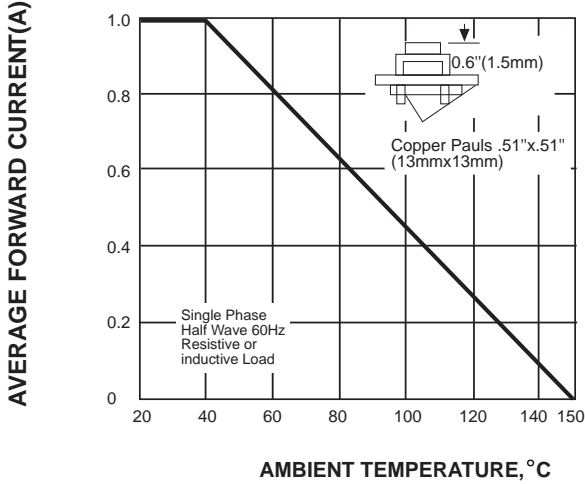


FIG. 2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

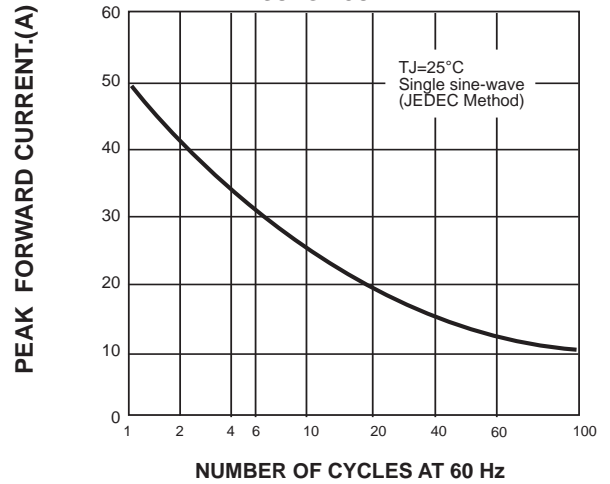


FIG. 3- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

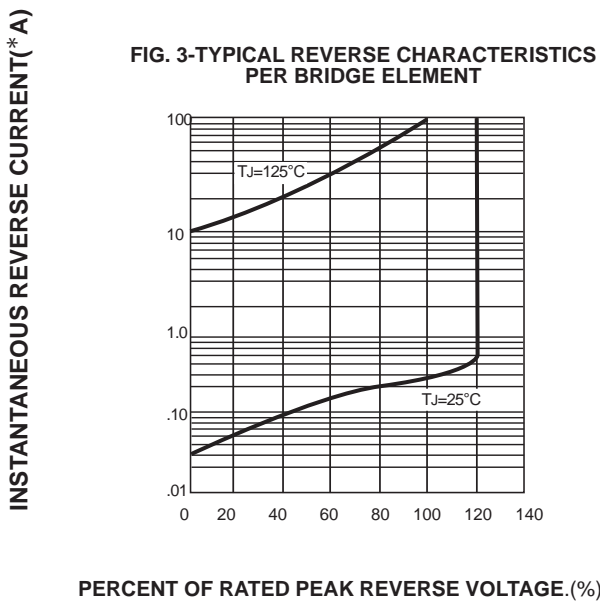


FIG. 4- TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT


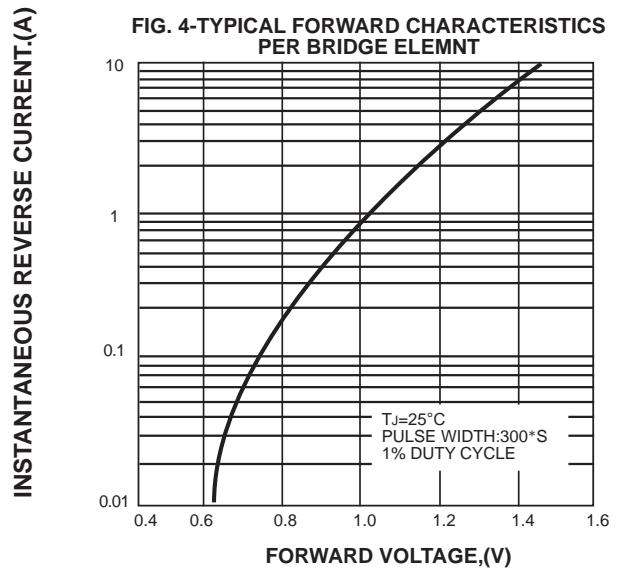


FIG. 3- TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT

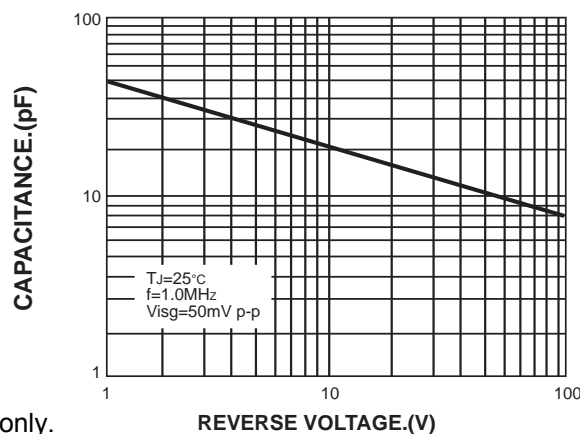

The curve above is for reference only.

单击下面可查看定价，库存，交付和生命周期等信息

[>>MDD\(辰达行\)](#)