




**Part Number :** [2039560203](#)

**Product Description :** SlimStack Board-to-Board Plug, 0.40mm Pitch, FSB5 Floating Series, 5.00mm Mated Height, 3.80 Mated Width, 20 Circuits

**Series Number :** 203956

**Status :** Active

**Product Category :** Board-to-Board Connectors

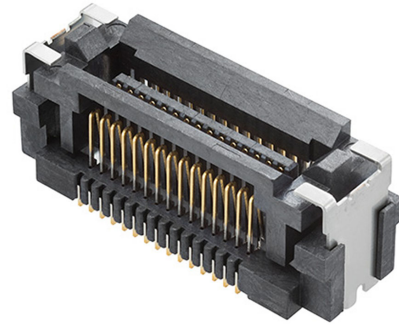

---

## Documents & Resources

### Drawings

[2039560203\\_sd.pdf](#)

### 3D Models and Design Files

[2039560203.dxf](#)

[2039560203.pdf](#)

[2039560203\\_stp.zip](#)

### Specifications

[2039550000-003.pdf](#)

[2039569200-SPK-201.pdf](#)

[2039550000-002.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Compliant with Exemption 44; 33; 34
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC

- Low-Halogen

### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

### EU RoHS Certificate of Compliance

---

## Part Details

### General

Status	Active
Category	Board-to-Board Connectors
Series	203956
Description	SlimStack Board-to-Board Plug, 0.40mm Pitch, FSB5 Floating Series, 5.00mm Mated Height, 3.80 Mated Width, 20 Circuits
Series Name	0.4, FSB5
Application	Board-to-Board, Signal
Component Type	PCB Header
Product Name	SlimStack
UPC	193264229024

### Electrical

Current - Maximum per Contact	0.3A
Voltage - Maximum	40V AC (RMS)/DC

### Physical

Breakaway	No
Circuits (Loaded)	20
Circuits (maximum)	20
Color - Resin	Black
Durability (mating cycles max)	30
Glow-Wire Capable	No
Lock to Mating Part	None

Mated Height	5.00mm
Mated Width	3.80mm
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	Liquid Crystal Polymer
Net Weight	108.403/mg
Number of Rows	2
Orientation	Vertical
Packaging Type	Embossed Tape on Reel
PCB Locator	No
Pitch - Mating Interface	0.40mm
Pitch - Termination Interface	0.40mm
Polarized to Mating Part	No
Polarized to PCB	No
Temperature Range - Operating	-40° to +125°C
Termination Interface Style	Surface Mount

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
0.40mm Pitch SlimStack Board-to-Board Receptacles	<u>203955</u>

---

This document was generated on Feb 28, 2025

单击下面可查看定价，库存，交付和生命周期等信息

[>>MOLEX](#)