

MSKSEMI 美森科

SEMICONDUCTOR



ESD



TVS



TSS



MOV



GDT



PLED

TL431A-MS

Product specification





DESCRIPTION

The TL431A-MS are three-terminal adjustable shunt regulators with a specified thermal stability. The output voltage may be set to any value between V_{ref} (approx. 2.5V) and 36V with two external resistors. The active output circuitry provides a very sharp turn-on characteristic making these devices an excellent replacement for zener diodes in many applications.

FEATURE

- On-wafer V_{ref} trimming $\pm 0.3\%$
- 95% chips after packaging have V_{ref} accuracy $\pm 0.5\%$
- Low Dynamic output impedance 0.1 Ω (Typ)
- Adjustable output voltage
- Fast turn-on response
- Sink current capability of 0.1mA to 100mA
- Low output noise
- Industrial temperature range
- Improved temperature compensation
- Excellent temperature coefficient 25ppm/ $^{\circ}\text{C}$
- Electrostatic discharge voltage 1.6kV

Reference News

PACKAGE OUTLINE	PIN CONFIGURATION	SYMBOL	MARKING
			
SOT-23			

ABSOLUTE MAXIMUM RATINGS

(Over operating free-air temperature range, unless otherwise noted)

PARAMETER	VALUE	UNITS
Cathode voltage (Note 1)	40	V
Continuous cathode current range	-100 to 150	mA
REF (Reference) input current range	-50 μA to 10mA	
Operating free-air temperature range	-25 to 85	$^{\circ}\text{C}$
Lead temperature (1.6mm aside from the case, 10 seconds)	260	
ESD (HBM)	2.5	kV

Note 1: The voltage values are with respect to the anode terminal unless otherwise noted.

RECOMMENDED OPERATING CONDITIONS

PARAMETER	MIN	MAX	UNIT
Cathode voltage, V_{KA}	V_{ref}	36	V
Cathode current, I_K (for regulation)	0.3	100	mA

ELECTRICAL CHARACTERISTICS

(At 25°C free-air temperature, unless otherwise noted)

PARAMETER	SYMBOL	TEST CIRCUIT	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reference voltage accuracy at wafer testing	dV_{ref}	1	Wafer testing $V_{ka} = V_{ref}$	-0.5%	0%	0.5%	%
Packaged dice with $V_{ref} \pm 0.5\%$ accuracy			$V_{ka} = V_{ref}$		95%		%
REF input voltage	V_{ref}	1	$V_{KA} = V_{ref}$, $I_K = 10mA$	2475	2500	2525	mV
Deviation of the REF input voltage overfull temperature range	$V_{ref(dev)}$	1	$V_{KA} = V_{ref}$, $I_K = 10mA$, $T_A = 0$ to $125^\circ C$		8	17	
REF input voltage-to-cathode voltage change ratio	$\Delta V_{ref}/\Delta V_{KA}$	2	$I_K = 10mA$ $\Delta V_{KA} = 10V$ to V_{ref} $\Delta V_{KA} = 36V$ to $10V$	-2,7 -2	-1.0 -0.4		mV/V
REF input current	I_{ref}	2	$I_K = 10mA$, $R1 = 10k\Omega$, $R2 = \infty$		0.5	1.2	μA
Deviation of the REF input current overfull temperature range	$I_{ref(dev)}$	2	$I_K = 10mA$, $R1 = 10k\Omega$, $R2 = \infty$, $T_A =$ full range		0.4	1.2	
Minimum cathode current for regulation	I_{min}	1	$V_{KA} = V_{ref}$		0.08	0.5	mA
Off-state cathode current	I_{off}	3	$V_{KA} = 36V$, $V_{ref} = 0$		0.01	0.9	μA
Dynamic impedance	$I_{Z_{KA}}$	1	$V_{KA} = V_{ref}$, $I_K = 0.2mA$ to $100mA$, $f < 1kHz$		0.1	0.5	Ω

PARAMETER MEASUREMENT INFORMATION




FIGURE 1. TEST CIRCUIT FOR $V_{KA} = V_{ref}$

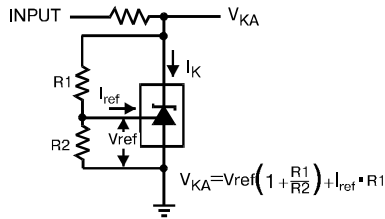


FIGURE 2. TEST CIRCUIT FOR $V_{KA} > V_{ref}$




FIGURE 3. TEST CIRCUIT FOR I_{off}

TYPICAL CHARACTERISTICS

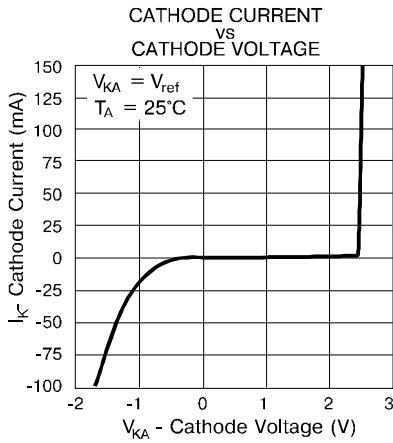


FIGURE 1

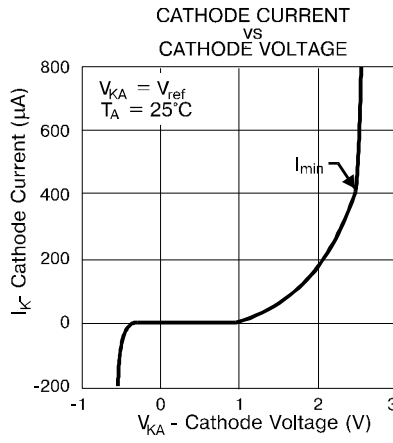


FIGURE 2

TYPICAL APPLICATIONS

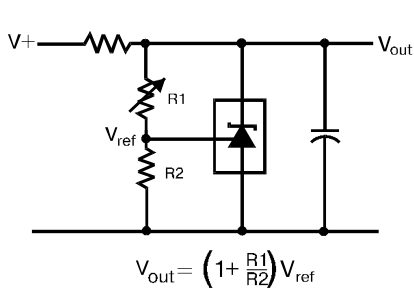


FIGURE 1. SHUNT REGULATOR





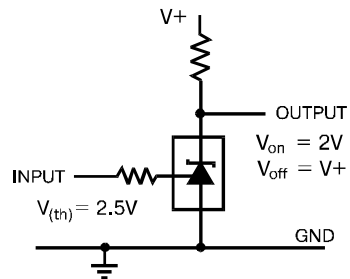


FIGURE 2. SINGLE-SUPPLY COMPARATOR WITH TEMPERATURE-COMPENSATED THRESHOLD

TYPICAL PERFORMANCE CHARACTERISTICS

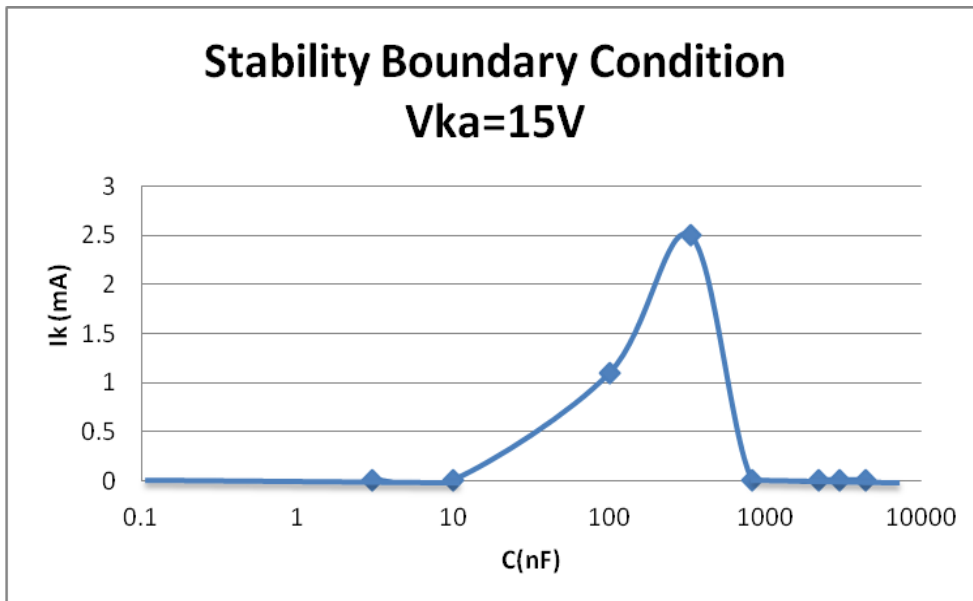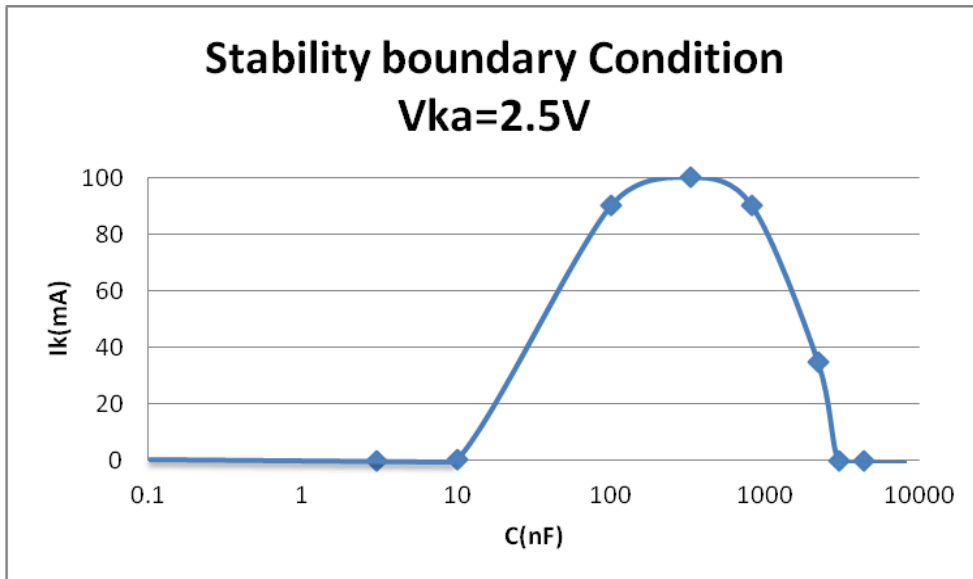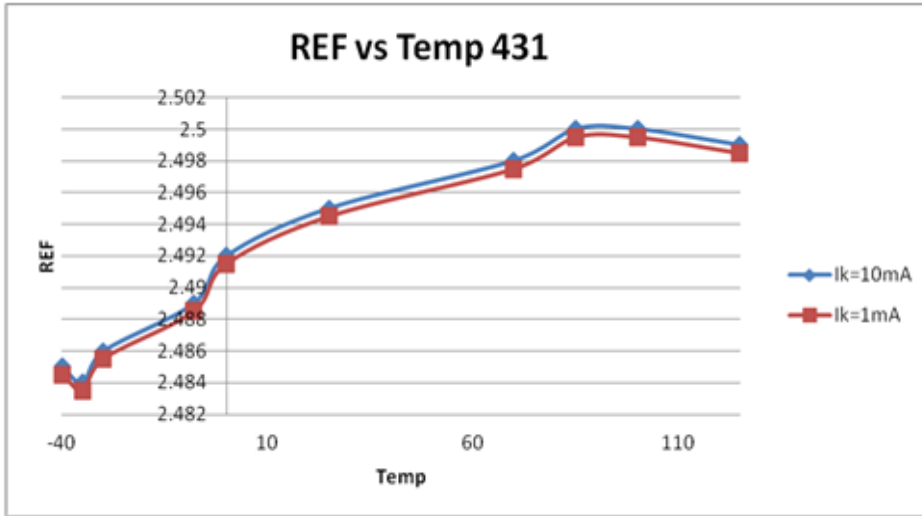


PULSE RESPONSE

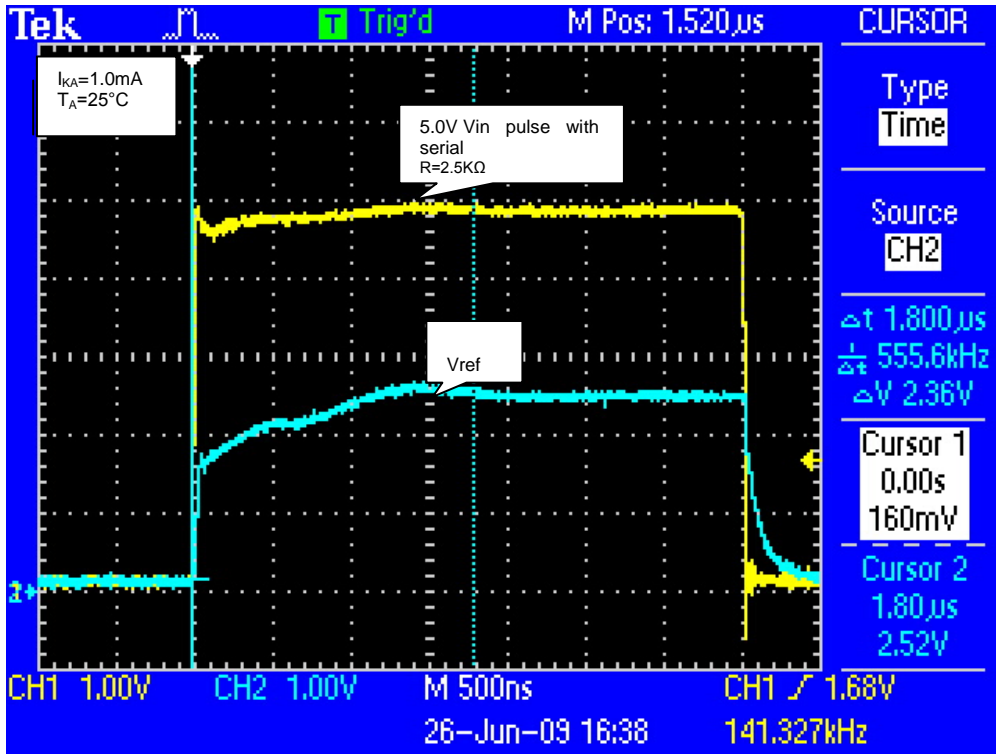


Pulse response: $T_{on} = 1.8\mu s$

PACKAGE MECHANICAL DATA

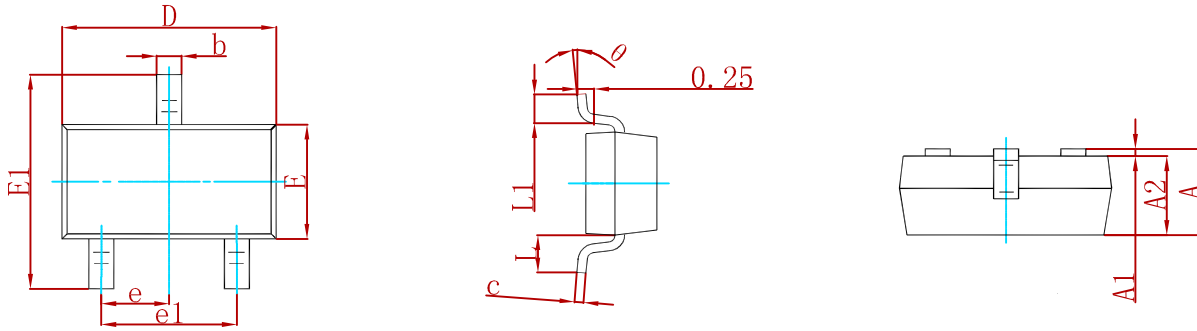

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

Suggested Pad Layout



- Note:
1. Controlling dimension: in millimeters.
 2. General tolerance: ± 0.05mm.
 3. The pad layout is for reference purposes only.

REEL SPECIFICATION

P/N	PKG	QTY
TL431A-MS	SOT-23	3000

Attention

- Any and all MSKSEMI Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MSKSEMI Semiconductor representative nearest you before using any MSKSEMI Semiconductor products described or contained herein in such applications.
- MSKSEMI Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all MSKSEMI Semiconductor products described or contained herein.
- Specifications of any and all MSKSEMI Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- MSKSEMI Semiconductor strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all MSKSEMI Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of MSKSEMI Semiconductor.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. MSKSEMI Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringement of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the MSKSEMI Semiconductor product that you intend to use.

单击下面可查看定价，库存，交付和生命周期等信息

[>>MSKSEMI\(美森科\)](#)