

5N Type Side-operational Light Touch Switches

Type: **EVQPF**




■ Features

- Wealth of product types: Horizontal type, snap-in terminals, etc.
- Can be automatically dip-soldered: Integral molding of the terminals and main body prevents the escape of flux.

■ Recommended Applications

- Operating switches for other electronic equipment

■ Explanation of Part Numbers

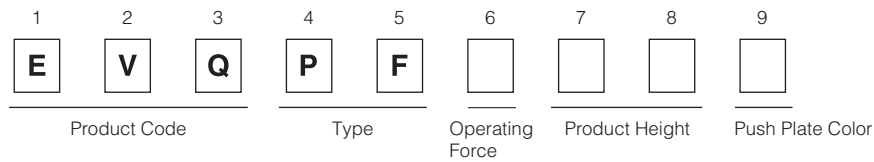

■ Specifications

Type		Snap action/Push-on type SPST	
Electrical	Circuit Diagram		
	Rating	10 μA 2 V DC to 20 mA 15 V DC (Resistive load)	
	Contact Resistance	50 mΩ max.	
	Insulation Resistance	50 MΩ min. (at 100 V DC)	
	Dielectric Withstanding Voltage	250 V AC for 1 minute	
Mechanical	Bouncing	3 ms max. (ON) 8 ms max. (OFF)	
	Operating Force	1.0 N±0.4 N 1.3 N±0.4 N 1.6 N±0.5 N	2.6 N±0.6 N
	Travel	0.25 mm±0.10 mm	
Endurance	Operating Life	100,000 cycles min.*	50,000 cycles min.
Operating Temperature		-20 °C to +70 °C	
Storage Temperature		-40 °C to +85 °C (Bulk)	
Minimum Quantity/Packing Unit		500 pcs. Polyethylene Bag (Bulk)	
Quantity/Carton		10,000 pcs.	

*1 million cycles also available, consult our salesmen.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Dimensions in mm (not to scale)

EVQPF

General dimension tolerance : ± 0.3
 () dimensions are reference dimensions.

PWB mounting hole for reference
 (PWB thickness=1.6 mm)
 View from mounting side

Circuit diagram

Part Numbers	Operating Force	ℓ=Push Plate Place	Push Plate Color	Operating Life
EVQPF003M	1.0 N	3.15 mm	White	100,000 cycles
EVQPF004R	1.0 N	3.85 mm	Red	100,000 cycles
EVQPF006K	1.0 N	5.85 mm	Black	100,000 cycles
EVQPF008K	1.0 N	8.35 mm	Black	100,000 cycles
EVQPF103M	1.3 N	3.15 mm	White	100,000 cycles
EVQPF104R	1.3 N	3.85 mm	Red	100,000 cycles
EVQPF106K	1.3 N	5.85 mm	Black	100,000 cycles
EVQPF108K	1.3 N	8.35 mm	Black	100,000 cycles
EVQPF203M	1.6 N	3.15 mm	White	100,000 cycles
EVQPF204R	1.6 N	3.85 mm	Red	100,000 cycles
EVQPF206K	1.6 N	5.85 mm	Black	100,000 cycles
EVQPF208K	1.6 N	8.35 mm	Black	100,000 cycles
EVQPF303M	2.6 N	3.15 mm	White	50,000 cycles
EVQPF304R	2.6 N	3.85 mm	Red	50,000 cycles
EVQPF306K	2.6 N	5.85 mm	Black	50,000 cycles
EVQPF308K	2.6 N	8.35 mm	Black	50,000 cycles

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
 Should a safety concern arise regarding this product, please be sure to contact us immediately.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Panasonic\(松下\)](#)