

Cable gland - G-INB-M32-M68N-NEPDS-S - 1415184

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Cable gland, Cable gland material: Nickel-plated brass, Application: Standard, External cable diameter 13 mm ... 21 mm, Shielding: No, Connecting thread: M32, Color: silver

The figure shows version G-INB-M25-S68N-NEPDS-S



Key Commercial Data

Packing unit	1 pc
Custom tariff number	74199990
Country of origin	Germany

Technical data

Dimensions

Length	146 mm
Length without connecting thread	138 mm
Connecting thread diameter	32 mm
Wrench size, union nut	36 mm
Wrench size, support	36 mm
Hexagon angular dimension GRP	40 mm
Length of the connecting thread	8 mm
External cable diameter	13 mm ... 21 mm

Ambient conditions

Degree of protection	IP68 (5 bar / 0.5 h)
	IP69K
Ambient temperature (operation)	-40 °C ... 100 °C (dynamic)

General

Cable gland material	Nickel-plated brass
Seal material	EPDM

Cable gland - G-INB-M32-M68N-NEPDS-S - 1415184

Technical data

General

Shielded	No
Thread type on connection side	M32
Color	silver

Classifications

eCl@ss

eCl@ss 5.1	27149109
eCl@ss 6.0	27149109

ETIM

ETIM 5.0	EC000441
----------	----------

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / GOST-R / cULus Recognized

Ex Approvals

Approvals submitted

Approval details


UL Recognized 

cUL Recognized 
--

Cable gland - G-INB-M32-M68N-NEPDS-S - 1415184


Approvals

GOST-R 

cULus Recognized 

Drawings

Dimensional drawing

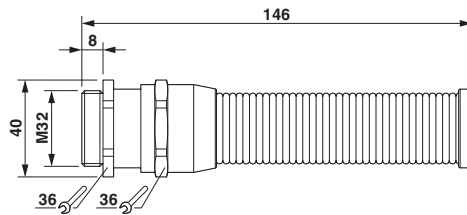

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)