

Front adapters - FLKM-PA-D37/HW/AN/C300 - 2900622

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE front adapters, for Honeywell C300, series C I/O, max. 1 x 16 channels (37-pos. D-SUB connector) can be connected

Product Features

- ✓ Pre-assembled system cables are connected directly to I/O modules using the front adapters
- ✓ Front adapter with D-SUB connector
- ✓ Connection of analog modules



Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	100.0 GRM
Custom tariff number	85369010
Country of origin	Germany

Technical data

General

Nominal voltage U_N	< 50 V AC
	60 V DC
Max. permissible current	1 A (per path)
Connection type, connector	D-SUB pin strip
Number of connectors	1
No. of positions, connector	37
Number of positions	37
Mounting position	any
Standards/regulations	DIN EN 50178
	IEC 60664
	IEC 62103

Front adapters - FLKM-PA-D37/HW/AN/C300 - 2900622

Technical data

General

Pollution degree	2
Surge voltage category	II

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Connection data, power supply

Connection method	Spring-cage connection
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

Supported controller

Controller	HONEYWELL C300
- suitable I/O card	TAIX01 (non-redundant)
	TAIX11 (redundant)
	TAOX01 (non-redundant)
	TAOX11 (redundant)

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002584

Front adapters - FLKM-PA-D37/HW/AN/C300 - 2900622


Classifications

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Drawings

Circuit diagram

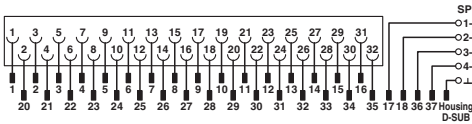

Connection scheme: FLKM-PA-D37/HW/AN/C300

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)