

FO connecting cable - FOC-PN-B-1000/M12-C/SCRJ/5 - 1416648

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled FO cable, round cable, 980/1000 µm POF fiber, M12 fiber optic connector to SC-RJ/IP20

POF cable, assembled with M12 connector to SC-RJ

Product Description

POF cable, assembled with M12 connector to SC-RJ

Product Features

- 2.2 mm individual wires made from extremely hard-wearing polyamide (PA)
- Assembled patch cable with test report
- M12-OPTIC with recessed ferrules to protect against damage
- optimized polishing for even better attenuation values
- Rugged polyurethane (PUR) outer sheath
- Highly tear-resistant aramid strain relief elements
- Pin connector pattern in accordance with DIN/IEC 61754-27
- Included in PROFINET planning guideline (v1.14)
- Robust connector, IP65/IP67
- Can be used in 10/100/1000 Mbps Ethernet systems
- Halogen-free, ozone, and UV resistant



Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	340.0 g
Custom tariff number	85444290
Country of origin	Germany

Technical data

Mechanical characteristics

FO connecting cable - FOC-PN-B-1000/M12-C/SCRJ/5 - 1416648

Technical data

Mechanical characteristics

Number of positions	2
Fiber type	POF
Fiber	Polymer fiber, 980/1000 µm
Ferrule diameter	2.50 mm
Connection method	M12 circular connector
Length of cable	5 m

Ambient conditions

Ambient temperature (operation)	-20 °C ... 70 °C
	-20 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Degree of protection	IP65
	IP67

Material data

Flammability rating according to UL 94	V0
Outer sheath, material	PUR
External sheath, color	green
Ferrule material	Copper alloy

Standards and Regulations

Impact strength	2 Nm / 10 x
Flammability rating according to UL 94	V0

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27061803
eCl@ss 6.0	27061090
eCl@ss 7.0	27061090
eCl@ss 8.0	27061003

ETIM

ETIM 3.0	EC000034
ETIM 4.0	EC000034
ETIM 5.0	EC001263

FO connecting cable - FOC-PN-B-1000/M12-C/SCRJ/5 - 1416648

Classifications

UNSPSC

UNSPSC 6.01	30211832
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	39121429

Approvals

Approvals

Approvals

EAC / EAC

Ex Approvals

Approvals submitted


Approval details

EAC

EAC

Drawings

Dimensional drawing

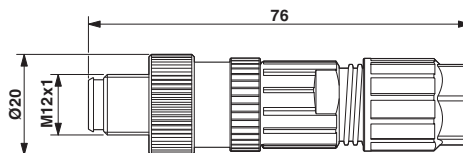

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact \(菲尼克斯\)](#)