

Coupling - VS-MP-PPC/CG-PO - 1403681

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)




Multi-port power connection: push/pull power, for passive PROFINET cabling to robots, including mounting foot.

Product description

Push/pull data coupling; version 14



Key commercial data

Packing unit	1 PCE
GTIN	 4 046356 664301
Custom tariff number	85366990
Country of origin	GERMANY

Technical data

Mechanical characteristics

Connection profile	Power: 5-pos.
Insertion/withdrawal cycles	≤ 100 (Power)
Max. cable diameter	9 mm ... 13 mm (Data cable gland)
Ambient temperature (operation)	-40 °C ... 70 °C

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Degree of protection	IP65

Material data

Housing material	Aluminum alloy
------------------	----------------

Electrical characteristics

Nominal voltage U_N	24 V
-----------------------	------

Coupling - VS-MP-PPC/CG-PO - 1403681

Technical data

Electrical characteristics

Nominal current I_N	16 A
-----------------------	------

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	27061801

ETIM


ETIM 3.0	EC000830
ETIM 4.0	EC001134
ETIM 5.0	EC001134

UNSPSC


UNSPSC 6.01	26121616
UNSPSC 7.0901	26121616
UNSPSC 11	26121604
UNSPSC 12.01	31261501
UNSPSC 13.2	26121616

Drawings

Drilling diagram

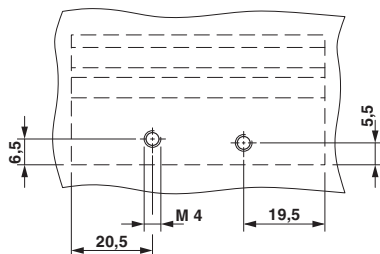

Dimensioned drawing

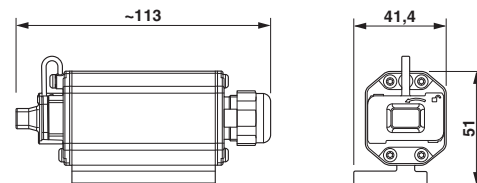

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)