

Control cabinet feed-through - CUC-BH-M12D1PBK-A/R4BE - 1414397

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Control cabinet feed-through, M12, 4-pos., D-coded to RJ45 socket, socket entry: 90°, IP65/IP67

Why buy this product

- Compact design
- 100 Mbps
- IP65/67
- UL



Ethernet

Key Commercial Data

Packing unit	1 STK
Weight per Piece (excluding packing)	40.0 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Mechanical characteristics

Shielded	yes
Insertion/withdrawal cycles	≥ 100
Cable exit	angled
Color	black
Mounting type	Rear mounting

Ambient conditions

Ambient temperature (operation)	-25 °C ... 85 °C
---------------------------------	------------------

Material data

Control cabinet feed-through - CUC-BH-M12D1PBK-A/R4BE - 1414397

Technical data

Material data

Flammability rating according to UL 94	V0
Housing material	PA
Contact material	Copper alloy

Electrical characteristics

Nominal voltage U_N	60 V
Nominal current I_N	0.5 A
Transmission characteristics (category)	CAT5 (IEC 11801:2002)
GRP transmission properties	Ethernet CAT5 (IEC 11801:2002)
Transmission speed	100 Mbps
Rated current	1.75 A

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Drawings


Explosion drawing

Exploded drawing

Dimensional drawing

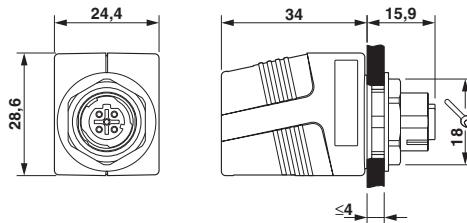


Dimensional drawing



Panel cutout

Circuit diagram

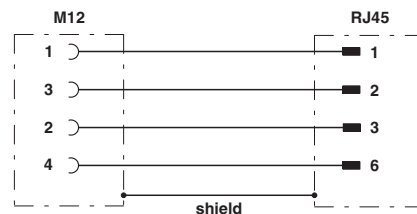

Circuit diagram

Control cabinet feed-through - CUC-BH-M12D1PBK-A/R4BE - 1414397

Classifications

eCl@ss

eCl@ss 8.0	27141134
eCl@ss 9.0	27141134

ETIM

ETIM 5.0	EC001283
----------	----------

Approvals

Approvals

Approvals

EAC / UL Listed / cUL Listed / EAC / cULus Listed

Ex Approvals

Approvals submitted

Approval details

EAC

UL Listed	
Nominal current IN	0.5 A
Nominal voltage UN	60 V

cUL Listed	
Nominal current IN	0.5 A
Nominal voltage UN	60 V

Control cabinet feed-through - CUC-BH-M12D1PBK-A/R4BE - 1414397

Approvals

EAC

cULus Listed 

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)