

#### TECHNICAL DATA SHEET

**Description**: 3G/GPRS/GSM + GNSS IP67 with

Magnetic Mount

PART NUMBER: W4165MMXX



### **Features:**

- 3G, GPRS, GSM
  - 824-960, 1710-2170MHz
- GNSS
  - · GPS, Galileo Glonass, Beidou
  - 1560-1608MHz
  - 30dB LNA
- Magnetic mount onto metal surfaces
- IP67

# **Applications:**

- Vehicular use
- Fleet management
- Tracking, navigation
- For easy installation and removal, no need to drill any holes

All dimensions are in mm / inches

Issue: 1719

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100

Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



#### TECHNICAL DATA SHEET

**Description**: 3G/GPRS/GSM + GNSS IP67 with

Magnetic Mount

PART NUMBER: W4165MMXX

## This document covers all product variants of the following product family

Antennas	GSM Cable			GPS Cable		
	Cable Type	Cable Length	Connector	Cable Type	Cable Length	Connector
W4165MM	RG-174 Black	4000mm/157.5"/13.2'	SMA Male	RG-174 Black	4000mm/157.5"/13.2'	SMA Male
W4165MMAI		1524mm/60"/5'	TNC Male		1524mm/60"/5'	RP-TNC Male
W4165MMSMA5		1524mm/60"/5'	SMA Male		1524mm/60"/5'	SMA Male
W4165MMRPSMA10		3048mm/120"/10'	RP-SMA Male		3048mm/120"/10'	RP-SMA Male

Issue: 1719

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Tel: 1-360-944-755 Downloaded From Oneyac.com



Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



#### TECHNICAL DATA SHEET

Description: 3G/GPRS/GSM + GNSS IP67 with

Magnetic Mount

PART NUMBER: W4165MMXX

### **ELECTRICAL SPECIFICATIONS**

Frequency (GSM) 824-960/1710-2170 MHz

Frequency (Beidou, GPS, Galileo, Glonass) 1561.098±2.046/

1575.42±1.023/

1602.5625±4MHz

Nominal Impedance 50  $\Omega$ 

VSWR\*\* (GSM) < 2:1

Average Peak Gain\* (GSM antenna, Low band, typical) 4 dB

Average Peak Gain\* (GSM antenna, High band, typical) 4.5 dB

GNSS antenna RHCP gain 1 dBic ± 2 dB

LNA gain  $30 dB \pm 2 dB$ 

Noise Figure 2.5 (cascade) dB

Current  $9 \text{ mA} \pm 2 \text{ mA}$ 

Vdc 3-5Vdc

LNA and filter attenuation

@ 824 MHz
 @ 960 MHz
 @ 1710 MHz
 @ 2170 MHz
 65 dB
 @ 65 dB

<sup>\*</sup>Measured on diameter 500mm GND plane and with 5 inch cables

<sup>\*\*</sup> Measured on diameter 500mm GND plane and with 10 feet cables



#### **TECHNICAL DATA SHEET**

**Description**: 3G/GPRS/GSM + GNSS IP67 with

Magnetic Mount

**PART NUMBER: W4165MMXX** 

### **MECHANICAL SPECIFICATIONS**

Antenna Color / Material Black

Connector type As requested
Cable type RG-174, Black
Cable length As requested

Fixing system Magnetic mount

Pull Force (in Z direction) min. 100N (22.5 lbf)
Side Push Forth (in X/Y direction) min. 140N (30 lbf)

Connector retention 30 N

Strain relief 30 N, applied to cable along axis

and perpendicular to cable entry

### **ENVIRONMENTAL SPECIFICATIONS**

Operating Temperature  $-40 \sim 85^{\circ}$  C Storage Temperature  $-40 \sim 85^{\circ}$  C Ingress Protection IP67

Wind-loading 160 km/h

RoHS Compliant Yes






#### **TECHNICAL DATA SHEET**

Description: 3G/GPRS/GSM + GNSS IP67 with

Magnetic Mount

**PART NUMBER: W4165MMXX** 

### **MECHANICAL DRAWING**

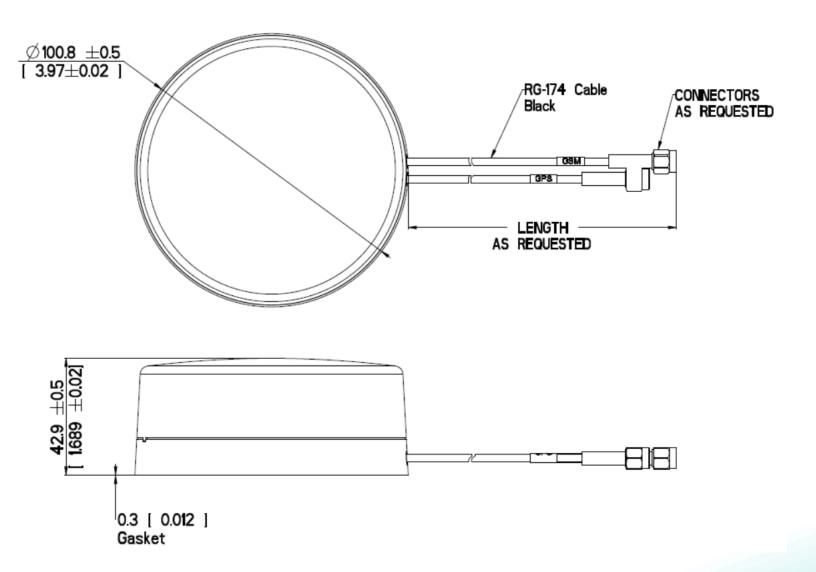




#### **TECHNICAL DATA SHEET**

**Description**: 3G/GPRS/GSM + GNSS IP67 with

Magnetic Mount

**PART NUMBER: W4165MMXX** 

### **TEST SETUP**

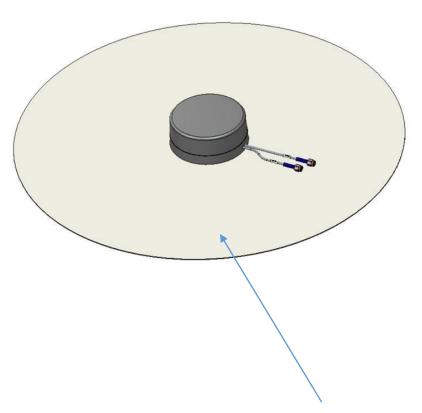

Diameter:500mm ground pane

Issue: 1719

<sup>\*</sup>Measured on diameter 500mm GND plane and with 5 inch cables for radiation performance

<sup>\*\*</sup> Measured on diameter 500mm GND plane and with 10 feet cables for VSWR



#### **TECHNICAL DATA SHEET**


Description: 3G/GPRS/GSM + GNSS IP67 with

Magnetic Mount


PART NUMBER: W4165MMXX

### **CHARTS**

## **VSWR\***

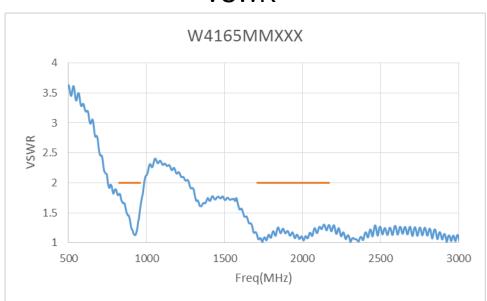

# **GNSS LNA performance**

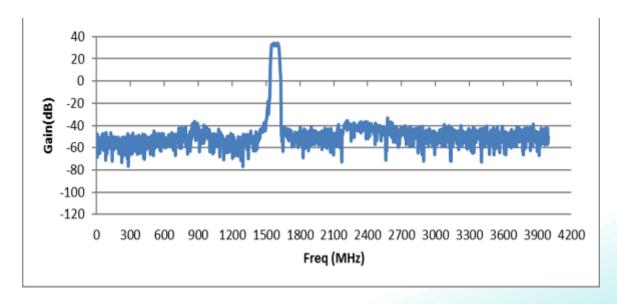



#### **TECHNICAL DATA SHEET**


**Description**: 3G/GPRS/GSM + GNSS IP67 with

Magnetic Mount

**PART NUMBER: W4165MMXX** 

### **CHARTS**

# GSM antenna total efficiency\*

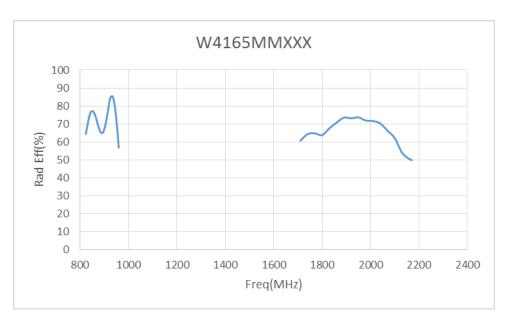

# Maximum 3D gain, GSM antenna\*



Issue: 1719





#### **TECHNICAL DATA SHEET**


**Description**: 3G/GPRS/GSM + GNSS IP67 with

Magnetic Mount


**PART NUMBER: W4165MMXX** 

### **CHARTS**

## GSM antenna Low band Radiation Pattern X-Y Plane\*

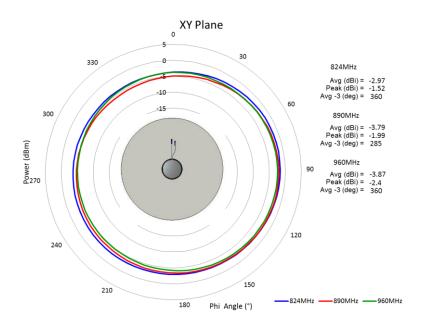

# GSM antenna Low band Radiation Pattern Z-X Plane\*

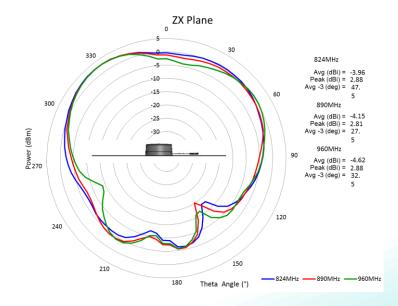



#### **TECHNICAL DATA SHEET**


**Description**: 3G/GPRS/GSM + GNSS IP67 with

Magnetic Mount


PART NUMBER: W4165MMXX

### **CHARTS**

## GSM antenna Low band Radiation Pattern Y-Z Plane\*

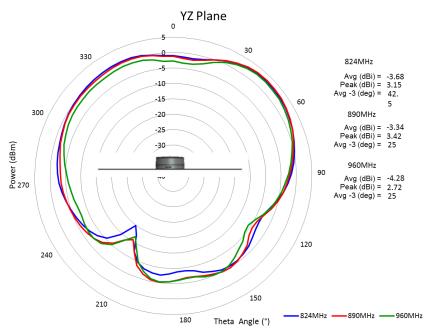

# GSM antenna High band Radiation Pattern X-Y Plane\*

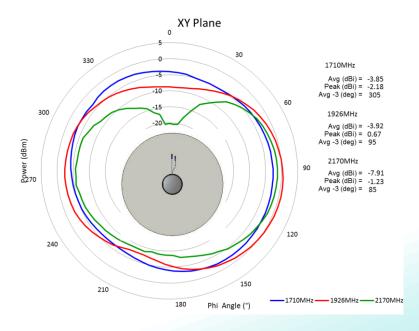

Issue: 1719

RŏHS



#### **TECHNICAL DATA SHEET**


**Description**: 3G/GPRS/GSM + GNSS IP67 with

Magnetic Mount


PART NUMBER: W4165MMXX

### **CHARTS**

# GSM antenna High band Radiation Pattern Z-X Plane\*

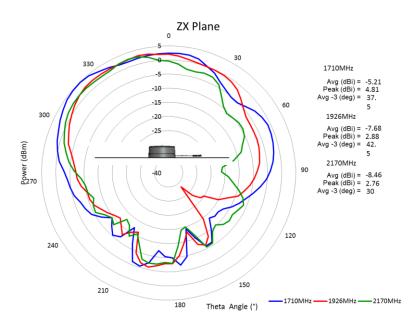

# GSM antenna High band Radiation Pattern Y-Z Plane\*

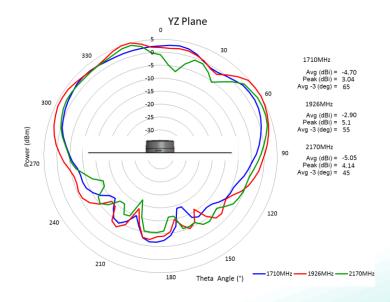



### **TECHNICAL DATA SHEET**


**Description**: 3G/GPRS/GSM + GNSS IP67 with

Magnetic Mount


PART NUMBER: W4165MMXX

### **CHARTS**

# RHCP Radiation Pattern (70mm x 70mm ground plane ) GPS & Galileo

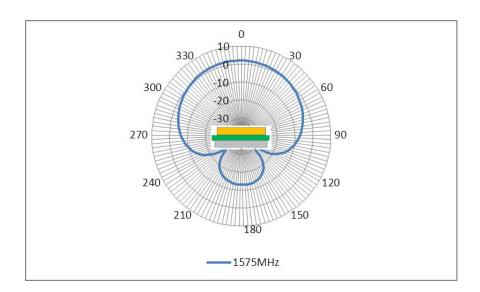

# RHCP Radiation Pattern (70mm x 70mm ground plane ) GLONASS

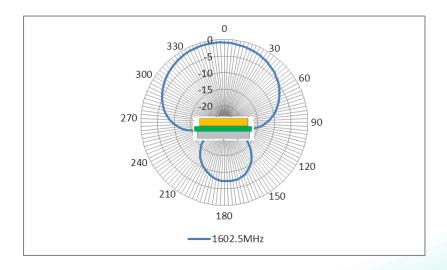



#### **TECHNICAL DATA SHEET**


**Description**: 3G/GPRS/GSM + GNSS IP67 with

Magnetic Mount

**PART NUMBER: W4165MMXX** 

### **CHARTS**

# RHCP Radiation Pattern (70mm x 70mm ground plane ) BD2

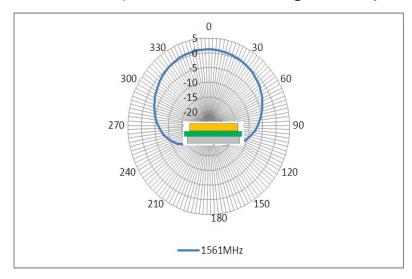







#### **TECHNICAL DATA SHEET**

**Description**: 3G/GPRS/GSM + GNSS IP67 with

Magnetic Mount

PART NUMBER: W4165MMXX

### **PACKAGING**

1 antenna packed in a plastic bag

12 plastic bags of antennas packed in a carton

1 label on each carton with part number, description, date code.

# 单击下面可查看定价,库存,交付和生命周期等信息

# >>Pulse(普思)