






NOTES:

- 1. ROHS COMPLIANT
- STORAGE TEMPERATURE: -50°C TO +125°C
- 3. COMPLIANCE TO J-STD:
 - Α. J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
 - В. J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE
 - C. J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
- TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX TO THE PART NUMBER (i.e HXXXXXXNL BECOMES HXXXXXXNLT).
- 5. MEETS AEC-Q200 REQUIREMENTS







FINAL OUTLINE


@ Copyright, 2018. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (08/14/18)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,1GD,1:1,SM,TU	HM5149NL-10	PS-2523.002-B	1 OF 3	HM5149NL	G








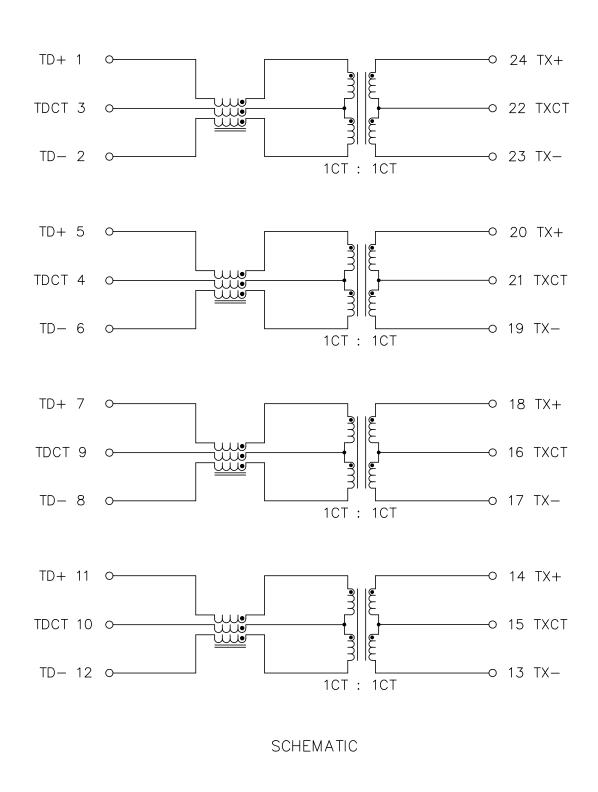

ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHER SPECIFIED MEETS IEEE 802.3 SPECIFICATION

PARAMETER	SPECIFICATIONS				
OPERATING TEMP	-40°C TO +125°C				
TURNS RATIO	1 : 1 ±2%				
POLARITY	PER SCHEMATIC				
	100 KHz	1-125 MHz			
INSERTION LOSS	-1.2 dB MAX	-0.2-0.002*f ^{1.4} dB MAX			
RETURN LOSS	.1-40 MHz	40-100 MHz			
$(Z OUT = 100 OHM \pm 15\%)$	-16 dB MIN	-10+20*LOG ₁₀ (f/80 MHz) dB MIN			
INDUCTANCE (OCL)	360 uH MIN @ 25 ℃				
100 KHz, 100 mVRMS @ 8 mA DC BIAS	300 uH MIN @ -40°C AND +85°C				
	1 MHz	10-100 MHz			
CROSSTALK, ADJACENT CHANNELS	-50 dB MIN	-55+22*LOG ₁₀ (f/10) dB MIN			
COMMON MODE	2 MHz	30-200 MHz			
REJECTION RATIO	-42 dB MIN	-15+20*LOG ₁₀ (f/200) dB MIN			
DC RESISTANCE, 1/2 WINDING	.65 OHMS MAX				
DC RESISTANCE IMBALANCE	±.065 OHMS MAX (CENTER TAP SYMMETRY)				
INPUT — OUTPUT ISOLATION	UT 1500 VRMS MIN @ 60 SECONDS				

NOTE: f IS FREQUENCY IN MHz.




@ Copyright, 2018. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (08/14/18)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,1GD,1:1,SM,TU	HM5149NL-10	PS-2523.002-B	2 OF 3	HM5149NL	G







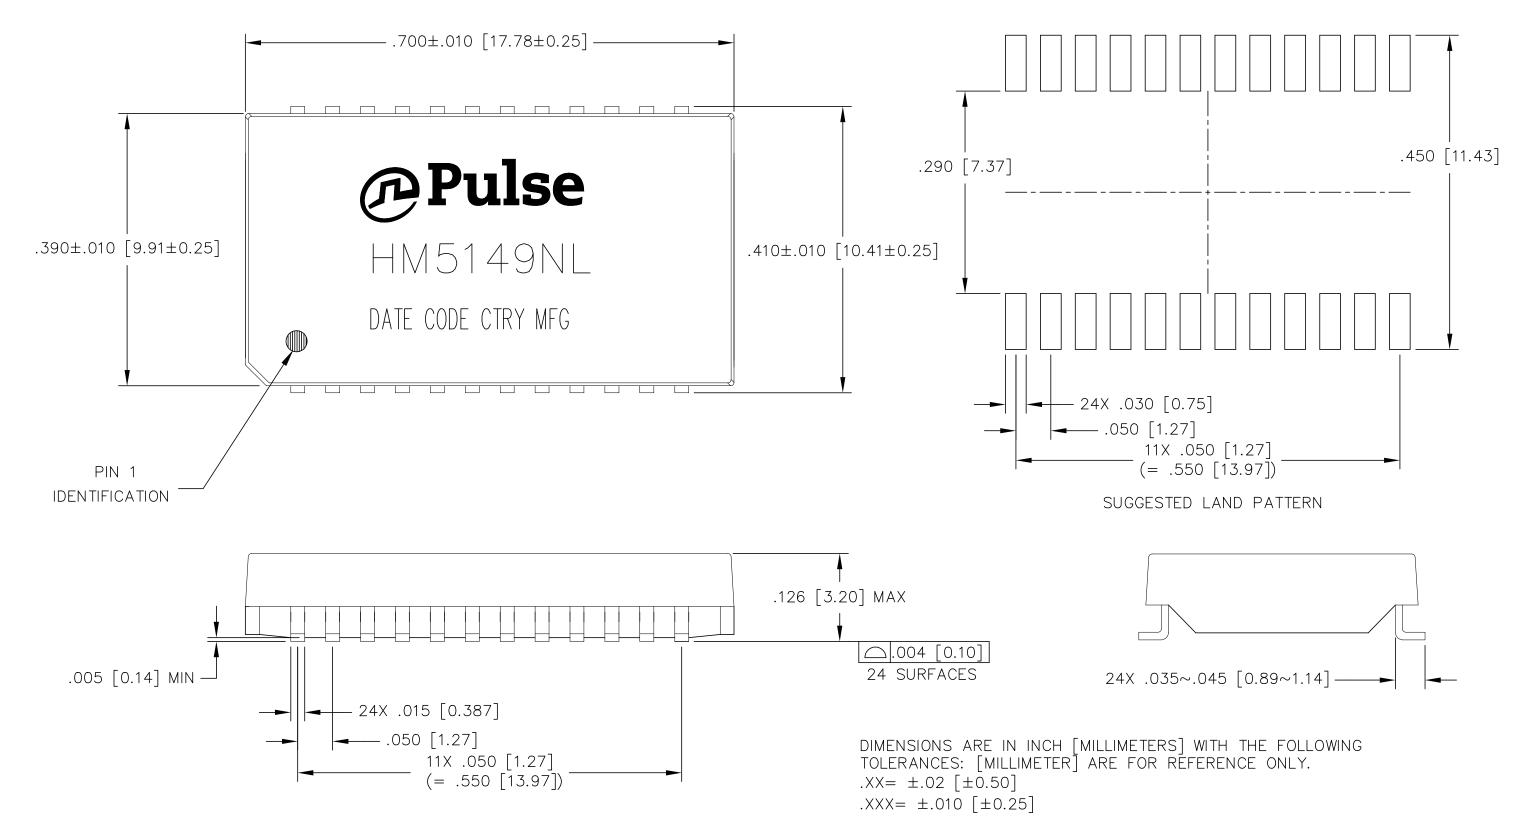

@ Copyright, 2018. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (08/14/18)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,1GD,1:1,SM,TU	HM5149NL-10	PS-2523.002-B	3 OF 3	HM5149NL	G

单击下面可查看定价,库存,交付和生命周期等信息

>>Pulse(普思)