


## FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

## MECHANICAL DATA

**Case :** JEDEC DO-214AC molded plastic body  
**Terminals :** leads solderable per MIL-STD-750, Method 2026  
**Polarity :** Color band denotes cathode end  
**Mounting Position :** Any  
**Weight :** 0.058 grams

### DO-214AC

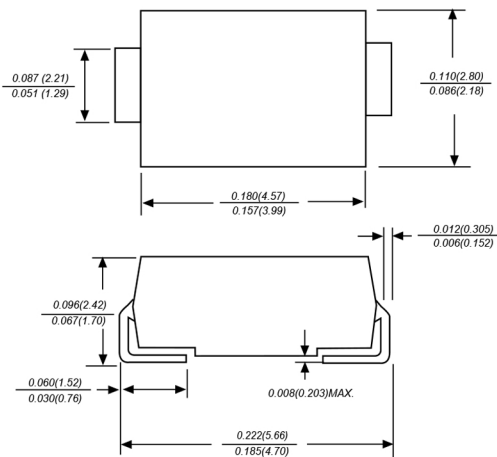







Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	SS22	SS23	SS24	SS25	SS26	SS28	SS210	SS215	SS220	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	80	100	150	200	VOLTS
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	56	70	105	140	VOLTS
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	80	100	150	200	VOLTS
Maximum average forward rectified current at $T_L$ (see fig.1)	$I_{(AV)}$	2.0									Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	50.0									Amps
Maximum instantaneous forward voltage at 2.0A	$V_F$	0.55		0.70		0.85		0.95		Volts	
Maximum DC reverse current $T_A=25^\circ C$ at rated DC blocking voltage $T_A=100^\circ C$	$I_R$	20			10			1		mA	
Typical junction capacitance (NOTE 1)	$C_J$	220			180					pF	
Typical thermal resistance (NOTE 2)	$R_{JA}$	75.0						45.0		°C/W	
Operating junction temperature range	$T_J$	-65 to +125			-65 to +150			-55 to +150		°C	
Storage temperature range	$T_{STG}$	-55 to +150									°C

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.  
 2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

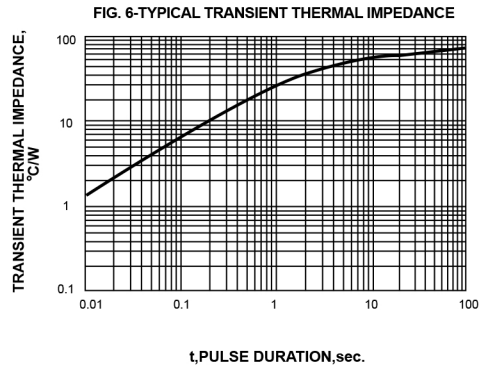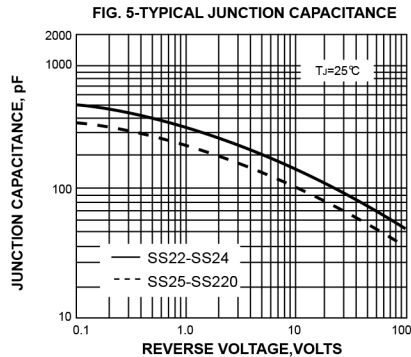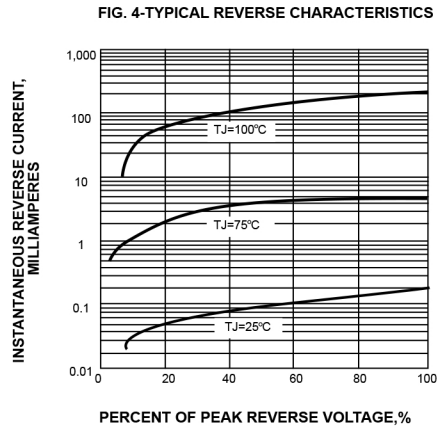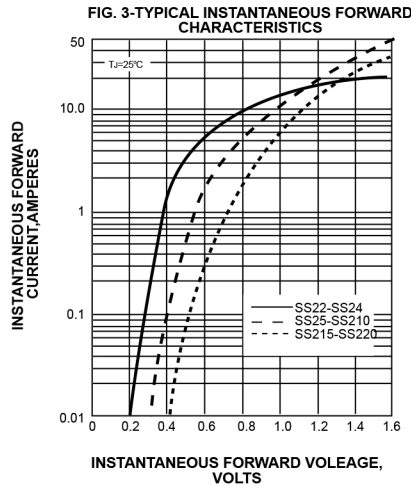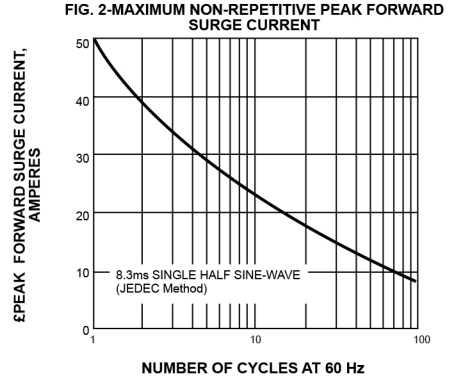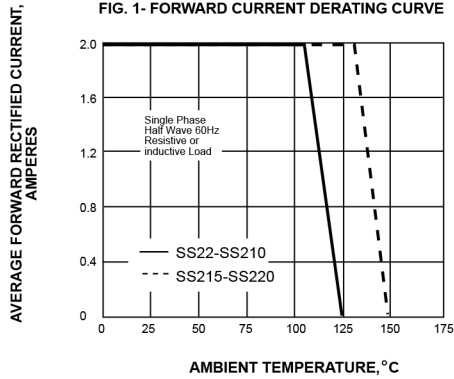

单击下面可查看定价，库存，交付和生命周期等信息

[>>RCD\(达标电子\)](#)