

MINI SLIDE SWITCH

NEW

NSI-10
Series



General Specification

1. Rating : DC 12V 0.5A~24V 0.3A
2. Contact Resistance : 30mΩ Max.
3. Insulation Resistance : Min 10,000 MΩ at DC 500V
4. Operating Force : 250gf ±150gf
5. Travel : 1.6mm
6. Life Cycle : 2,000 cycle(with load)

HOW TO ORDER

NSI


Type

NSI SMD Type

Slider


Slider

- Slider 1.4mm



-

L Slider 2.8mm



10

Circuit




10 Change over Type

Terminal




Terminal

S SMD Type of Vertical
HS SMD Type of Angle

NSI-10S Type(Change over)

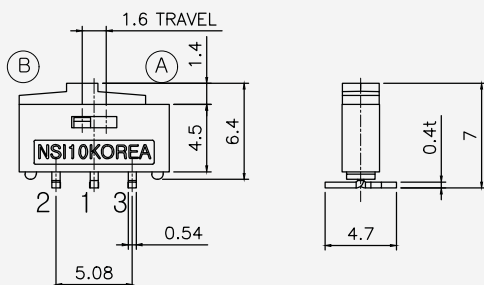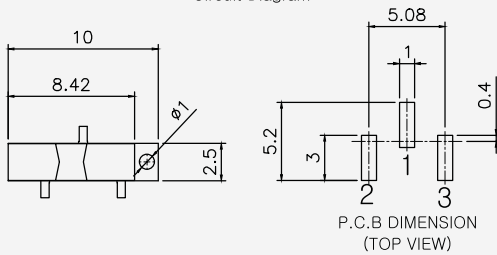

NSI-10HS Type(Change over)

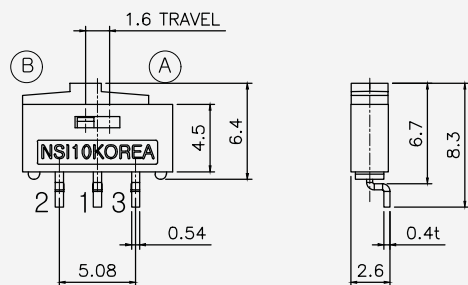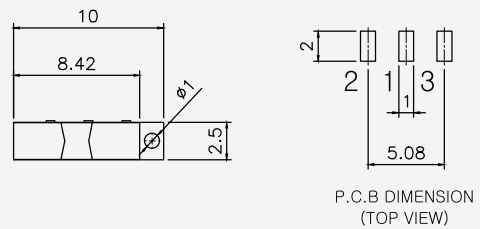

单击下面可查看定价，库存，交付和生命周期等信息

[>>SUNGMUN\(韩国星纹电子\)](#)