


VOLTAGE RANGE: 150 - 200V
CURRENT: 2.0 A

Features

- Schottky Barrier Chip
- Ideally Suited for Automatic Assembly
- Low Power Loss, High Efficiency
- For Use in Low Voltage Application
- Guard Ring Die Construction
- Plastic Case Material has UL Flammability Classification Rating 94V-O

Mechanical Data

- Case: SMA/DO-214AC, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.064 grams (approx.)

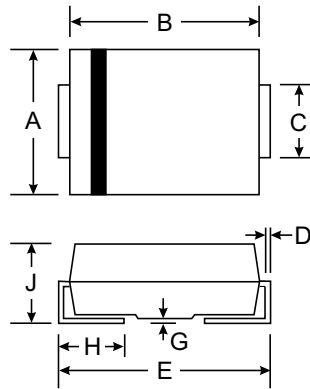

SMA(DO-214AC)		
Dim	Min	Max
A	2.29	2.92
B	4.00	4.60
C	1.27	1.63
D	0.15	0.31
E	4.80	5.59
G	0.10	0.20
H	0.76	1.52
J	2.01	2.62
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	SS2150A	SS2200A	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	150	200	V
Maximum RMS voltage	V _{RMS}	105	140	V
Maximum DC blocking voltage	V _{DC}	150	200	V
Maximum average forward rectified current 0.375" (9.5mm) lead length(see fig.1)	I _(AV)	2.0		A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	50.0		A
Maximum instantaneous forward voltage at 2.0A	V _F	0.85	0.95	V
Maximum DC reverse current <small>T_A=25°C</small> at rated DC blocking voltage <small>T_A=100°C</small>	I _R	0.2		mA
		2.0		
Typical junction capacitance (NOTE 1)	C _J	80		pF
Typical thermal resistance (NOTE 2)	R _{θJA}	88		°C/W
Operating junction temperature range	T _J	-65 to +150		°C
Storage temperature range	T _{STG}	-65 to +150		°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.


2. P.C.B. mounted with 0.2x0.2 (5.0x5.0mm) copper pad areas



RATINGS AND CHARACTERISTIC CURVES SS2150A THRU SS2200A


AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

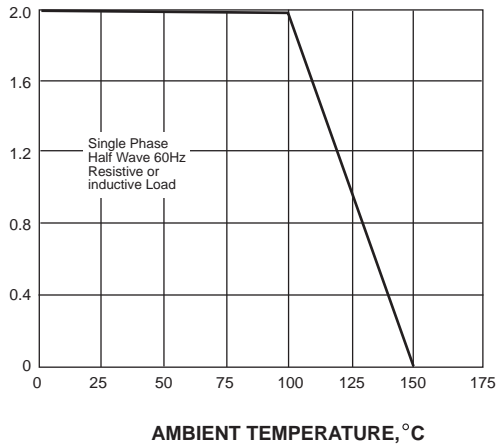


PEAK FORWARD SURGE CURRENT, AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

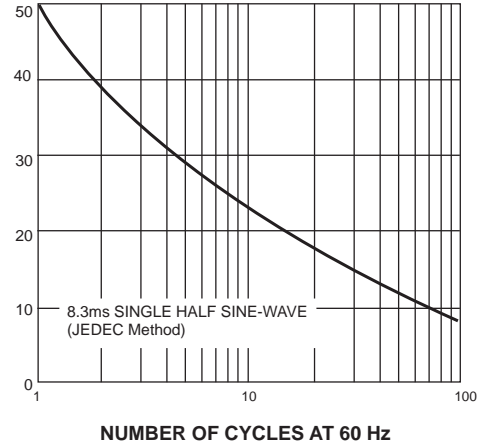


INSTANTANEOUS FORWARD CURRENT, AMPERES

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

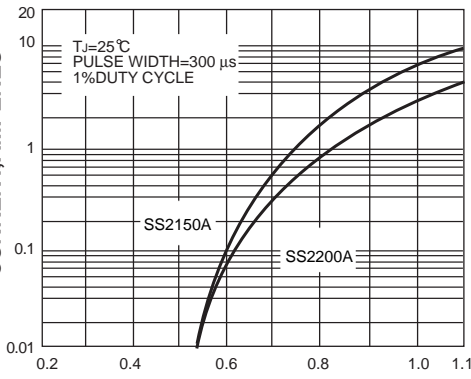


INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

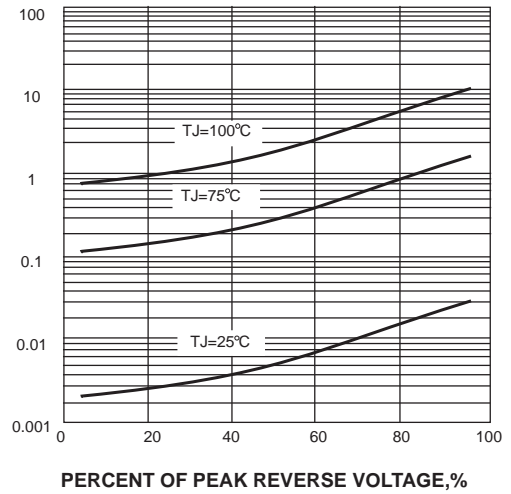


JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

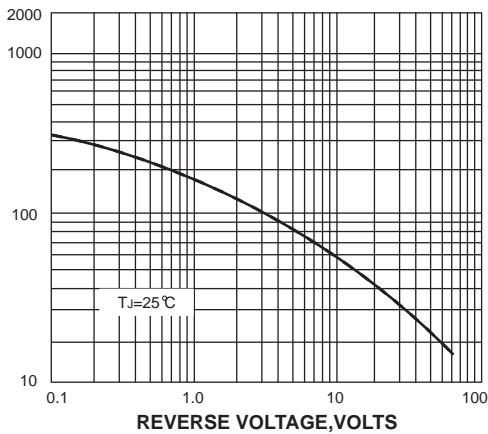

TRANSIENT THERMAL IMPEDANCE, °C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

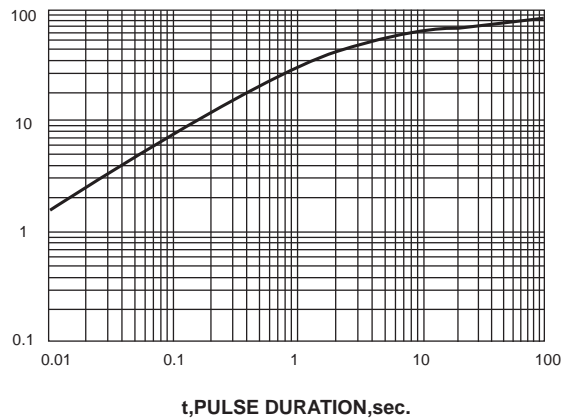

单击下面可查看定价，库存，交付和生命周期等信息

[>>SUNMATE\(森美特\)](#)