

SMD Power Inductor

TMPC0624H-Series(G)-D

1. Features


1. Carbonyl Powder.
2. Compact design.
3. High current, low DCR, high efficiency.
4. Very low acoustic noise and very low leakage flux noise.
5. High reliability.
6. 100% Lead(Pb)-Free and RoHS compliant.
7. Operating temperature -40~+125°C(Including self - temperature rise)



2. Applications

Note PC power system, incl. IMVP-6
DC/DC converter .


Recommend PC Board Pattern

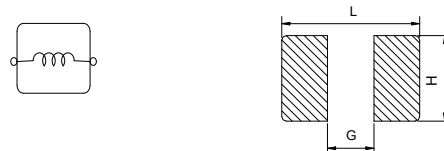

L(mm)	G(mm)	H(mm)
7.7	2.5	3.5


Note: 1. The above PCB layout reference only.
2. Recommend solder paste thickness at 0.15mm and above.

3. Dimensions

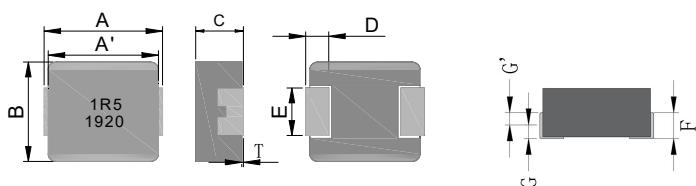


Series	A(mm)	A'(mm)	B(mm)	C(mm)	D(mm)	E(mm)	T(mm)	F(mm)	G(mm)	G'(mm)
TMPC0624H	7.0±0.3	6.5±0.2	6.6±0.3	2.2±0.2	1.8±0.3	3.0±0.3	0~+0.2	1.1±0.3	0.4±0.2	0.7±0.3

4. Part Numbering



A: Series
B: Dimension
C: Type
D: Inductance
E: Inductance Tolerance
F: Code

BxC
Carbonyl Powder.
1R5=1.50uH
M=±20%,Y=±30%
Marking: Black.1R5 and 1920(19 YY, 20 WW, follow production date).



D+:電流驅動端子,高電位端.
D-:電流驅動端子,低電位端.
S+:電位偵測端子,高電位端.
S-:電位偵測端子,低電位端.

DCR 示意圖


5. Specification





Part Number	Inductance L0 (uH)	I rms (A) Typ	I sat (A) Typ	DCR (mΩ) Typ. @25°C	DCR (mΩ) Max. @25°C
TMPC0624H-R10YG-D	0.10±30%	30.0	70.0	1.40	1.70
TMPC0624H-R15YG-D	0.15±30%	30.0	45.0	1.80	2.30
TMPC0624H-R20MG-D	0.20±20%	23.0	40.0	1.90	2.80
TMPC0624H-R22MG-D	0.22±20%	21.0	34.0	2.00	3.20
TMPC0624H-R33MG-D	0.33±20%	18.0	30.0	3.60	4.40
TMPC0624H-R36MG-D	0.36±20%	17.0	29.0	3.80	4.60
TMPC0624H-R47MG-D	0.47±20%	15.0	26.0	4.80	5.10
TMPC0624H-R56MG-D	0.56±20%	13.0	24.0	5.50	6.50
TMPC0624H-R60MG-D	0.60±20%	13.0	22.0	5.70	6.90
TMPC0624H-R68MG-D	0.68±20%	13.0	21.0	6.40	7.20
TMPC0624H-R82MG-D	0.82±20%	11.0	17.0	8.00	9.50
TMPC0624H-1R0MG-D	1.00±20%	11.0	16.0	10.5	13.5
TMPC0624H-1R5MG-D	1.50±20%	9.00	15.0	17.0	20.0
TMPC0624H-2R2MG-D	2.20±20%	7.00	14.0	23.0	28.0
TMPC0624H-3R3MG-D	3.30±20%	6.00	10.0	34.0	39.0
TMPC0624H-4R7MG-D	4.70±20%	5.50	9.00	41.0	50.0
TMPC0624H-5R6MG-D	5.60±20%	5.00	8.00	56.0	62.0
TMPC0624H-6R8MG-D	6.80±20%	4.00	7.00	65.0	72.0
TMPC0624H-8R2MG-D	8.20±20%	3.60	6.00	81.0	95.0
TMPC0624H-100MG-D	10.0±20%	3.20	5.00	92.0	101
TMPC0624H-150MG-D	15.0±20%	2.50	3.50	150	180
TMPC0624H-220MG-D	22.0±20%	1.80	3.00	185	215

Note:

1. Test frequency : Ls : 100KHz /1.0V.
2. All test data referenced to 25°C ambient.
3. Testing Instrument(or equ) : L: HP4284A,CH11025,CH3302,CH1320,CH1320S LCR METER / Rdc:CH16502,Agilent33420A MICRO OHMMETER.
4. Heat Rated Current (I rms) will cause the coil temperature rise approximately Δ T of 40°C
5. Saturation Current (I sat) will cause L0 to drop approximately 30%.
6. The part temperature (ambient + temp rise) should not exceed 125°C under worst case operating conditions. Circuit design, component, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
7. Special inquiries besides the above common used types can be met on your requirement.

10. Typical Performance Curves

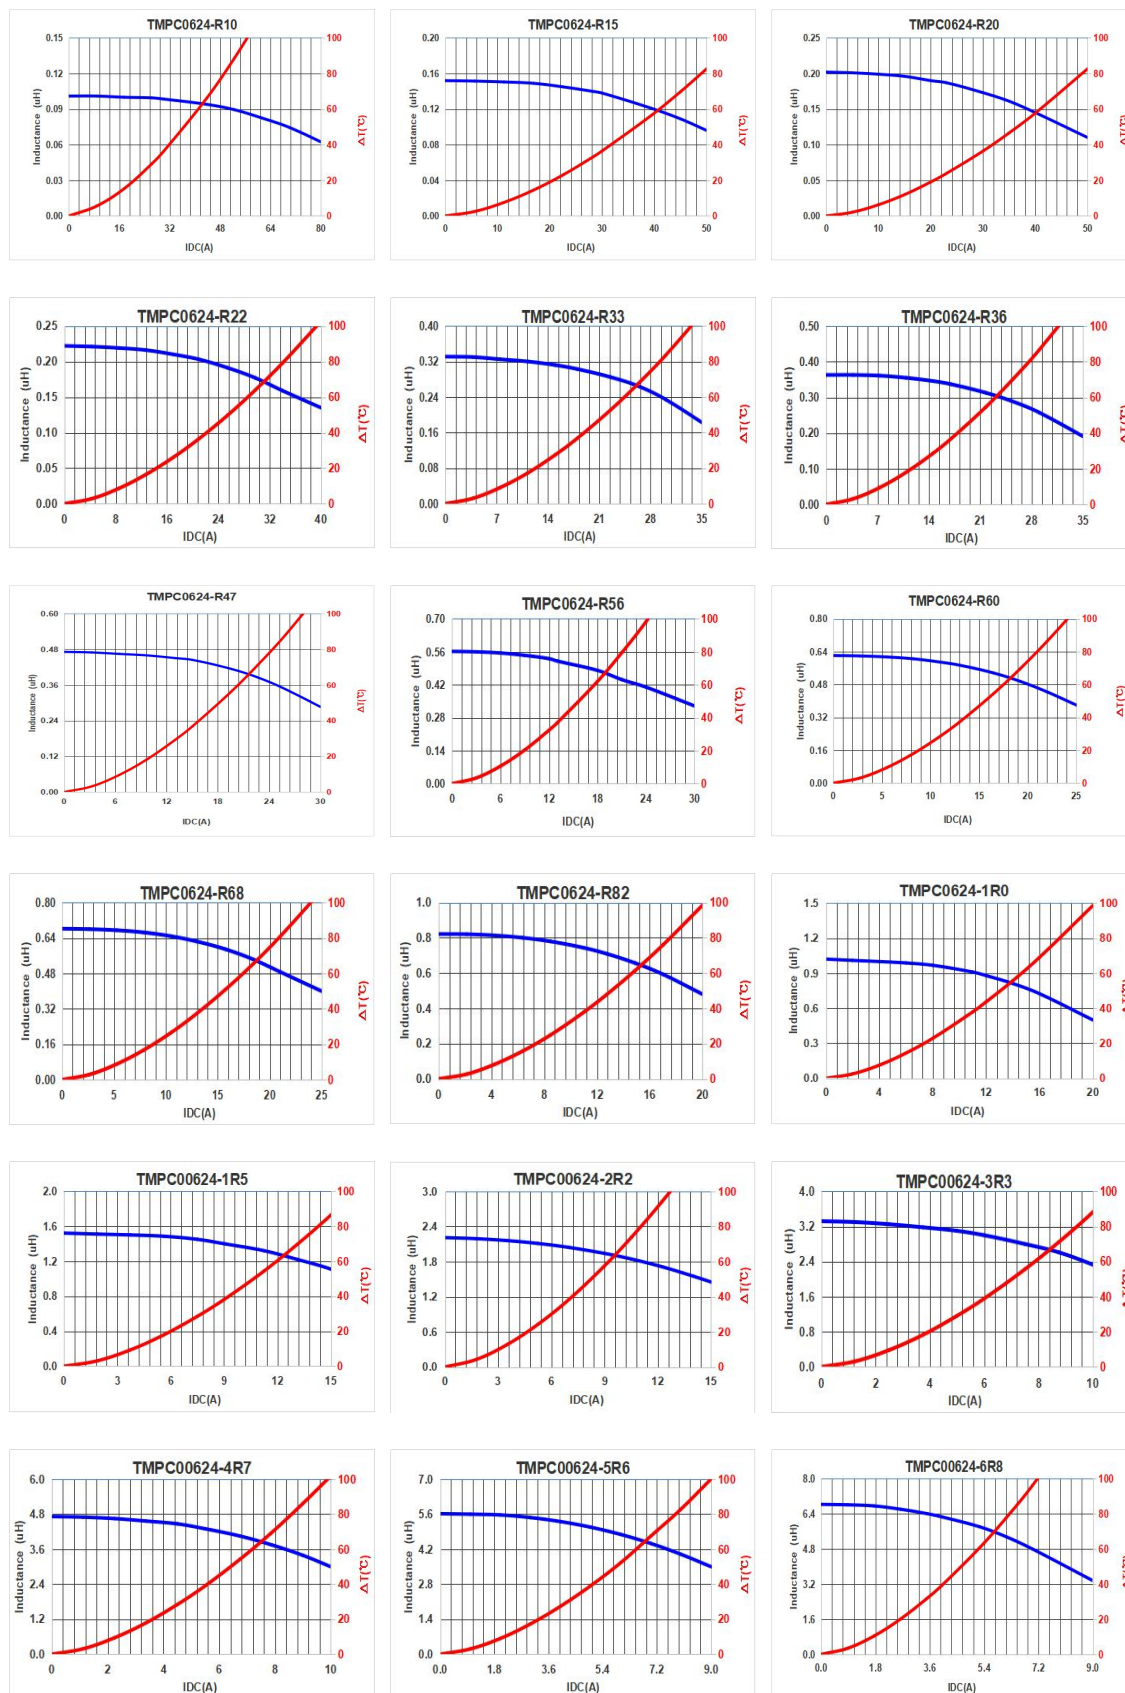

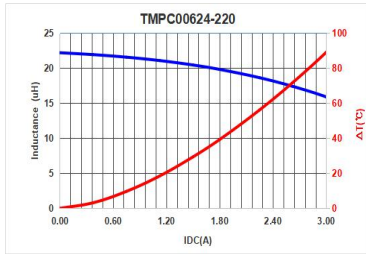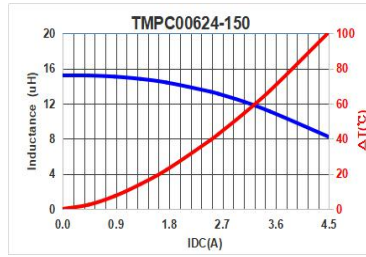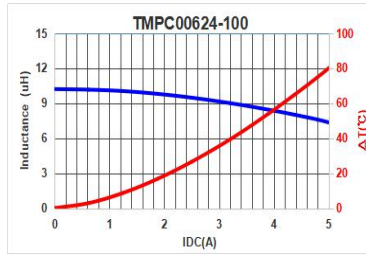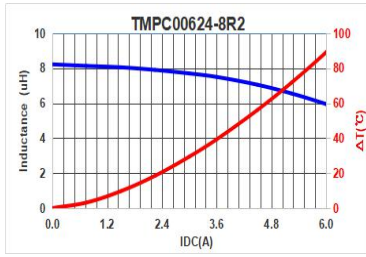

单击下面可查看定价，库存，交付和生命周期等信息

[>>TAI-TECH\(台庆\)](#)