


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	A1	ECR-15-005665	10AUG2015	BDA PKS



- 1 SLOT TERMINATES A SINGLE MAGNET WIRE, COPPER RANGE IS 0.64-0.81mm [#22-#20] AWG. ALUMINUM RANGE IS 0.72-0.91mm [#21-#19] AWG. ALUMINUM WIRE RANGE APPLIES FOR POST-TIN PLATED VERSIONS ONLY.
- 2 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

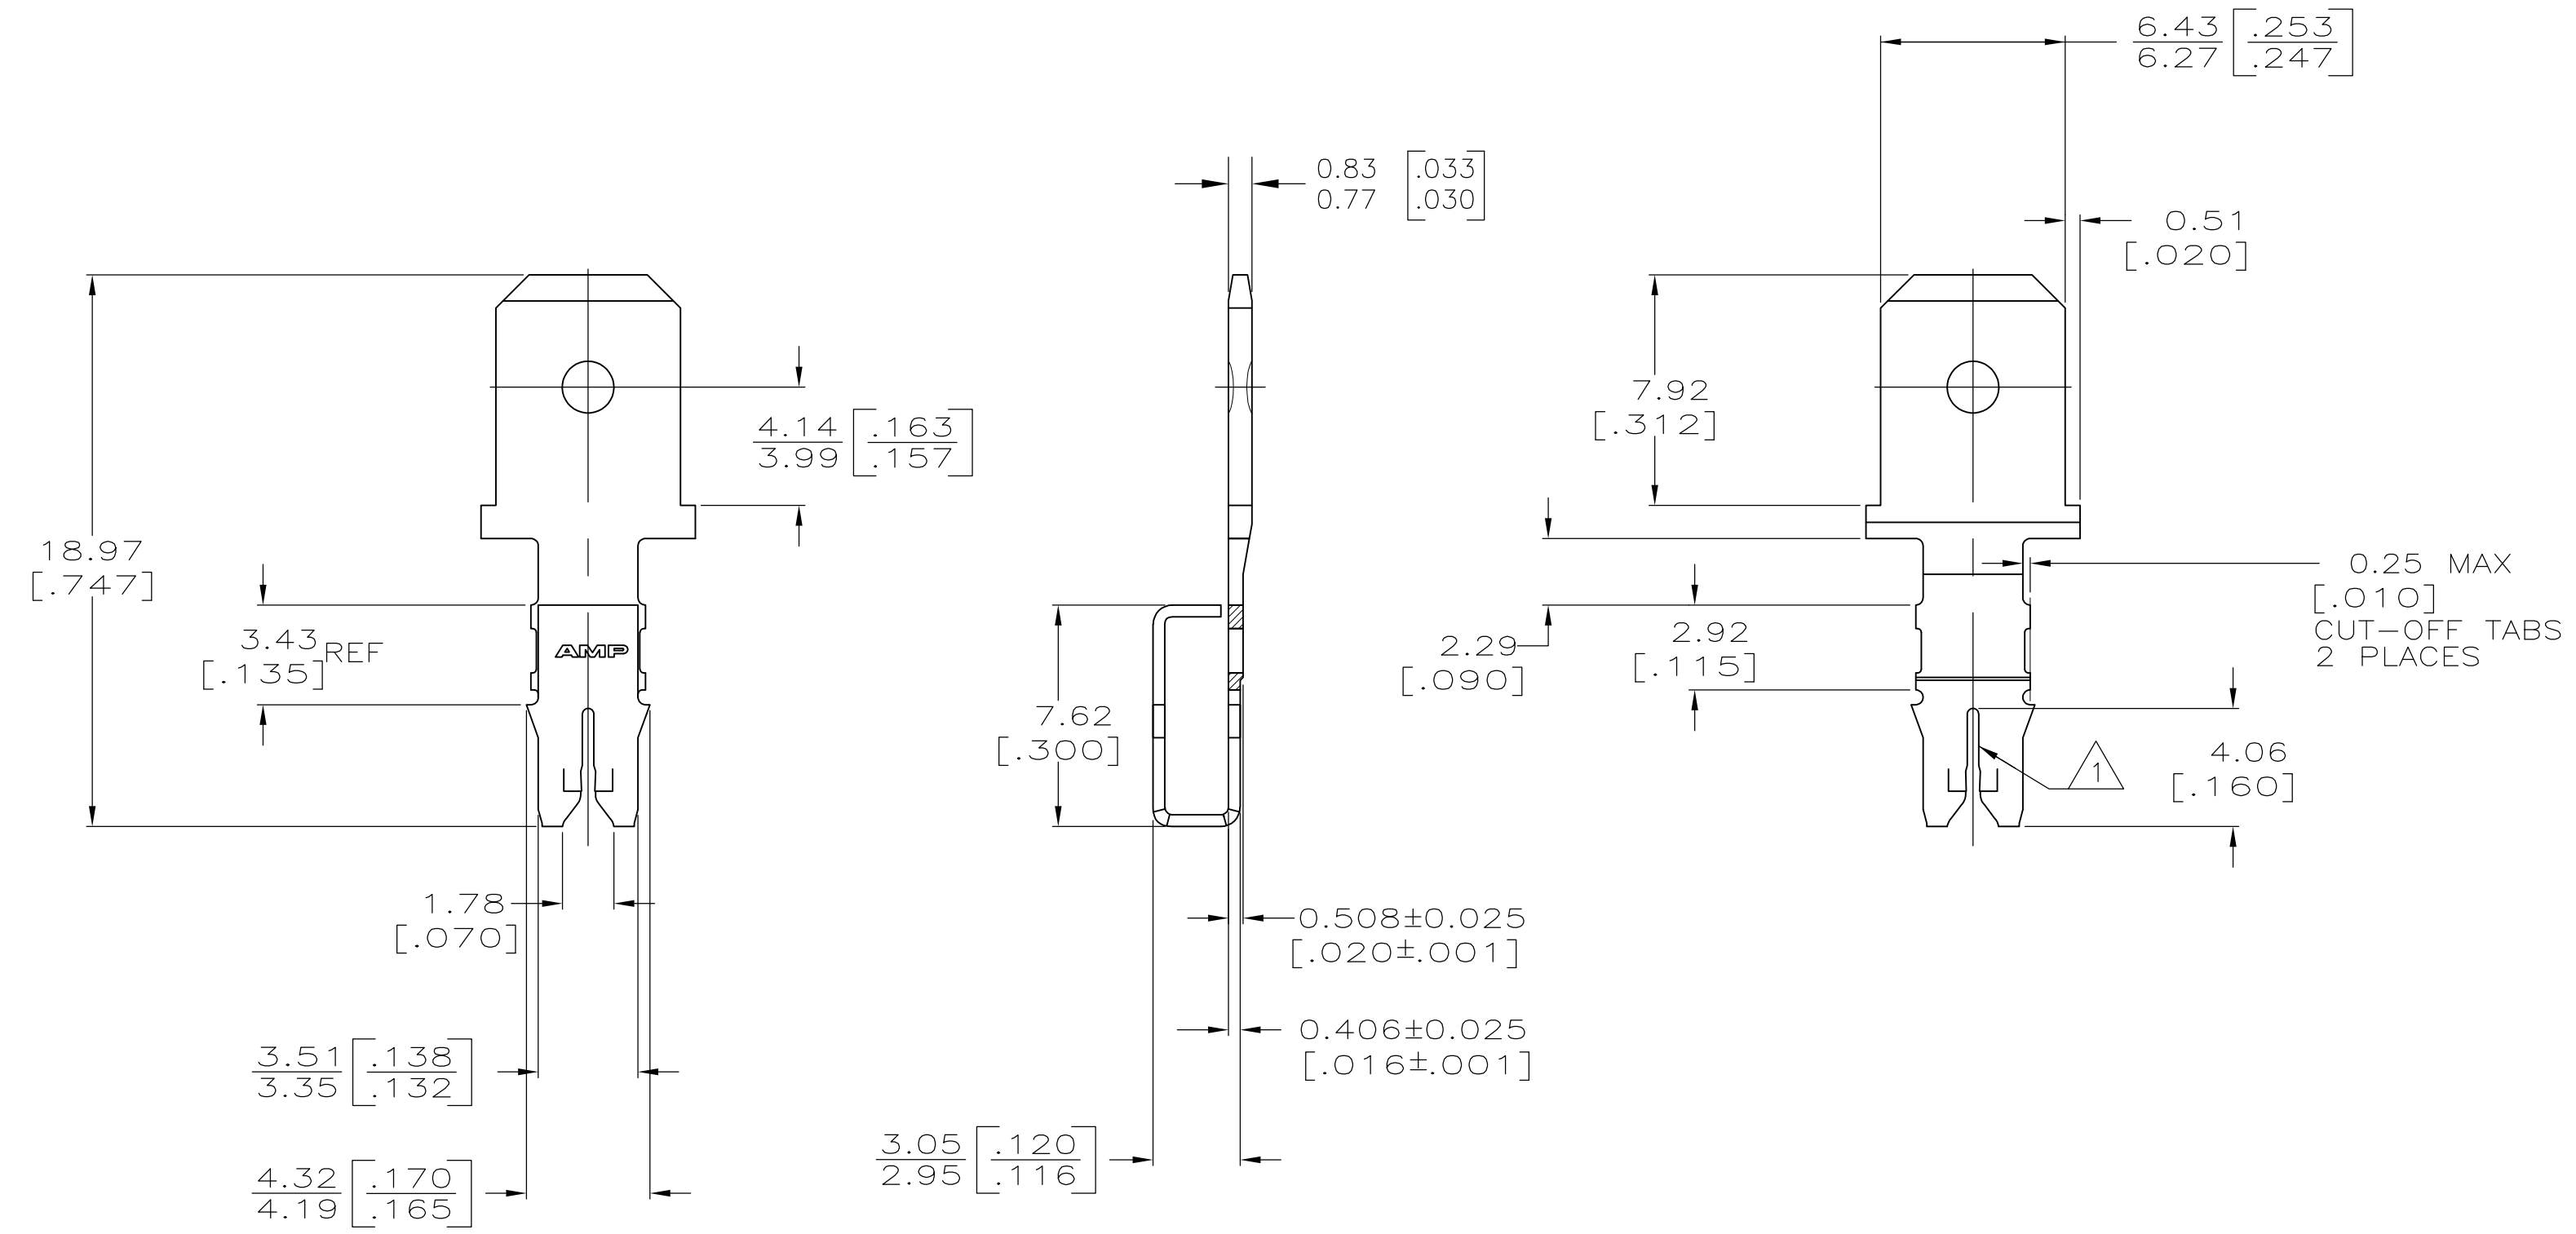

62658-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.URICH 08JUN98	TE connectivity	
DIMENSIONS: mm [INCHES]		CHK M.S.FEHER 08JUN98		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD N.E.NEFF 08JUN98	NAME	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.25[.010] 3 PLC ± - 4 PLC ± - ANGLES ± - -		PRODUCT SPEC 108-2012	TAB, LOOSE PIECE, 6.35 [.250] FASTON™, MAG-MATE™	
MATERIAL 4M HARD PRE-MILLED BRASS		FINISH 0.002032 [.000080] MIN TIN	APPLICATION SPEC 114-2046	RESTRICTED TO
		WEIGHT -	SIZE A2	CAGE CODE 00779
		CUSTOMER DRAWING	DRAWING NO 62658	SCALE 5:1
			SHEET 1 OF 1	REV A1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)