

SPECIFICATION CONTROL DRAWING


55/7322

TITLE THREE CONDUCTOR CABLE, FLAT BRAID SHIELDED, JACKETED, OUTER SPACE

Date 5-20-96

Revision

This specification sheet forms a part of the latest issue of Raychem Specification 55/.

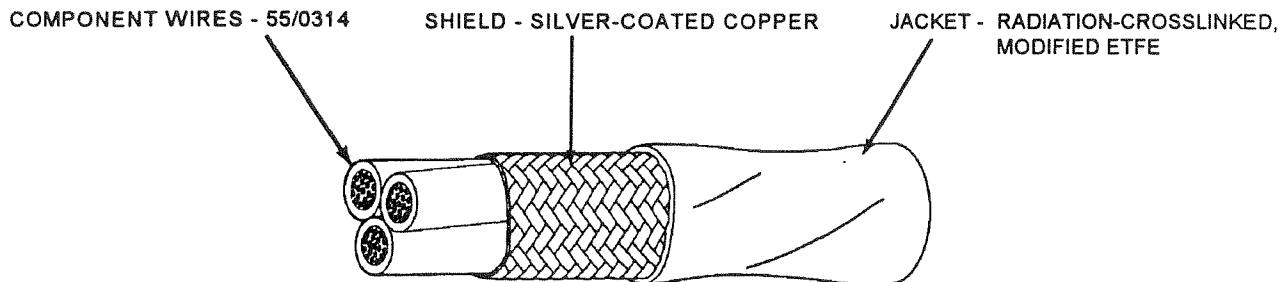

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD STRAND THICKNESS (± .0004)	JACKET THICKNESS (inches)		OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55/7322-28-*	28	.0015	.0040	.0050	.067	.071	4.78
55/7322-26-*	26	.0015	.0040	.0050	.077	.081	6.48
55/7322-24-*	24	.0015	.0040	.0050	.085	.089	8.11
55/7322-22-*	22	.0015	.0040	.0050	.102	.106	12.08
55/7322-20-*	20	.0015	.0040	.0050	.125	.129	17.82

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

JACKET COLOR: White preferred

JACKET ELONGATION: 75% (minimum)

JACKET FLAWS:

Spark Test, 1000 volts (rms), 60 Hz, 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100% test

SHIELD COVERAGE: 90% (minimum)

VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
1500 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The "*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

Example: AWG 24, black, white and red component wires: white jacket: 55/7322-24-0/9/2-9

NOTE: Nominal values are for information only.
Nominal values are not requirements.

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
1-800-2 Raychem FAX: 1-415-381-6297

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)