
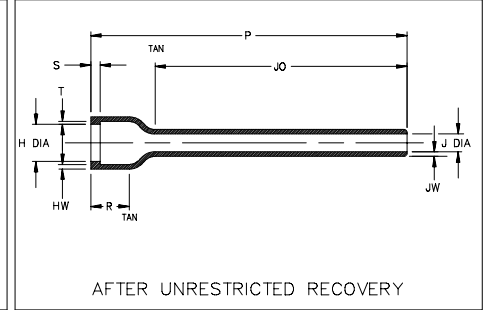


Thermofit[®] Molded Parts
 Specification Control Drawing
 Limited Distribution

Part Number : 202F274-X-24
 Description : Boot, Straight, With Lip

NOTES

- All dimensions are in $\frac{\text{inches}}{\text{[millimeters]}}$
- Dimensions appearing in table are as follows:
 a - As Supplied
 b - After Unrestricted Recovery
- Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.
- "S" & "T" dimensions apply to a minimum of 240° of the circumference.

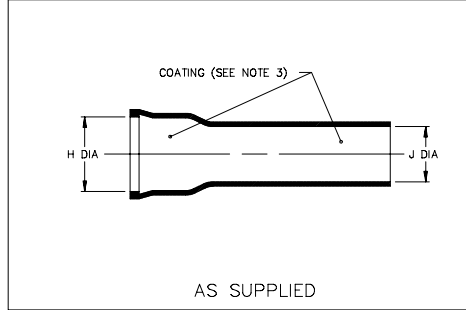

PART NUMBER	H		J		P	R	JO	HW	JW	S	T
	Min	Max	Min	Max							
	a	b	a	b	±10% b	±10% b	Ref b	+06/-03 b	±03 b	+06/-03 b	±03 b
202F274-X-24	2.50 [63,5]	1.62 [41,1]	1.79 [45,5]	.59 [15,0]	4.00 [101,6]	.60 [15,2]	2.21 [56,1]	.07 [1,8]	.07 [1,8]	.07 [1,8]	.07 [1,8]

Raychem

RAYCHEM CORPORATION
 300 CONSTITUTION DRIVE
 MENLO PARK, CALIFORNIA 94025


Revision : A
 Date : 2/24/99

Part Number : 202F274-X-24
 Description : Boot, Straight, With Lip

Thermofit[®] Molded Parts
 Specification Control Drawing
 Limited Distribution

Part Number : 202F274-X-24
 Description : Boot, Straight, With Lip

MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION
-51	Flexible, EPB	RT-1321	/164	S-1124	Adhesive

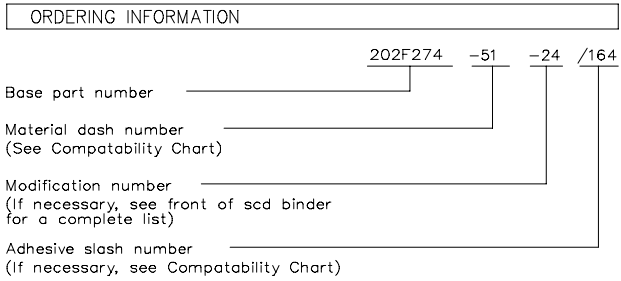

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR
 NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION

Raychem

RAYCHEM CORPORATION
 300 CONSTITUTION DRIVE
 MENLO PARK, CALIFORNIA 94025

Revision : A
 Date : 2/24/99

Part Number : 202F274-X-24
 Description : Boot, Straight, With Lip
 CAD FILE MP99055

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)