


PROD	LOC	DIST	P	F	ZONE	LTR	REVISIONS		
5049	DF	A0					DESCRIPTION	DATE	APPO
CODE						0	RELEASED W/O 0-083F & NPR 90-0165	5-90	wpl

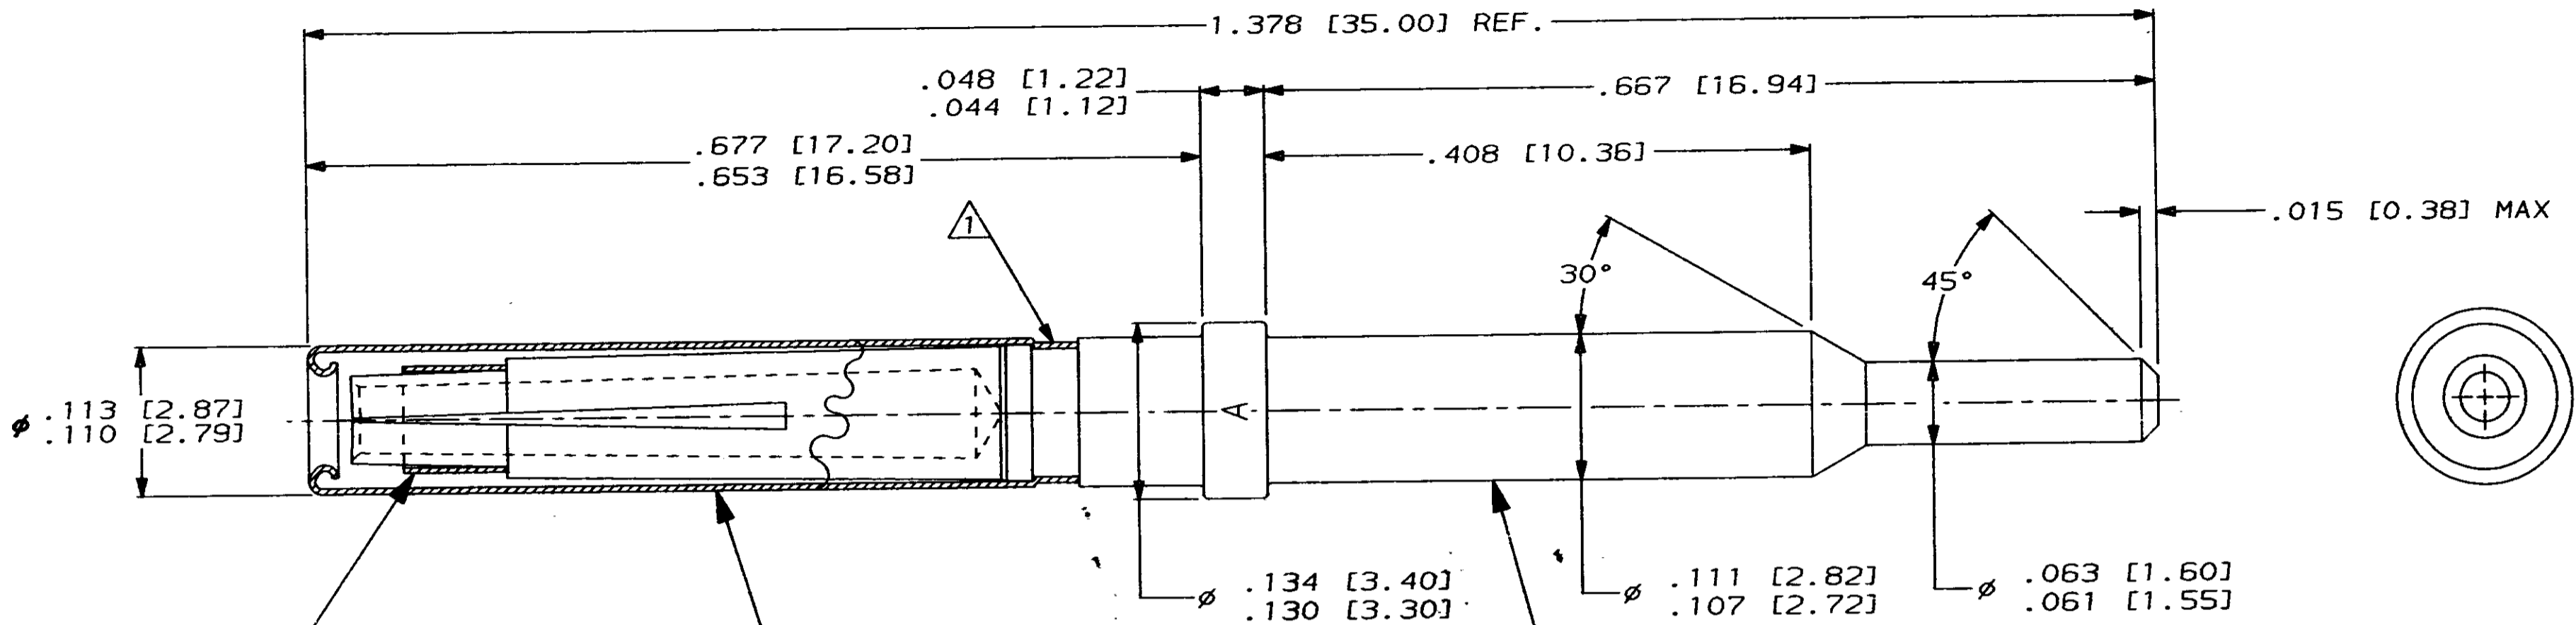

SPRING NAPKIN
 MATL.; STAINLESS STEEL
 PER QQ-S-766

CONTACT HOOD
 MATL.; STAINLESS STEEL
 PER QQ-S-766
 FINISH; PASSIVATED
 PER QQ-P-35

SOCKET CONTACT
 MATL.; COPPER ALLOY
 PER ASTM-B-301
 FINISH: .000050 [0.00127] MIN GOLD PER MIL-G-45204
 OVER .000050 [0.00127] MIN NICKEL PER QQ-N-290

AS SHOWN	447247-1
NOTE	PART NO.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± .005 [0.13] ANGLES ± 2°	DR <i>W. Keufert</i> 5-21-90	AMP AMP INCORPORATED Harrisburg, Pa. 17105		
	CHK <i>E. Howard</i> 5-30-90			NAME
	MATERIAL	APPO <i>E. Howard</i> 5-30-90	SPECIAL SOCKET CONTACT ASSEMBLY, SIZE-16, ARINC 404	
	FINISH	APPO <i>D/M</i> 5/30/90		
	PRODUCT SPEC	SIZE C	CAGE CODE 00779	DRAWING NO 447247
	APPLICATION SPEC	SCALE 10:1	SHEET 1 of 1	
	WEIGHT			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)