

# SPECIFICATION CONTROL DRAWING

SCD

55/LF0314

Title WIRE, RADIATION-CROSSLINKED, MODIFIED ETFE-INSULATED,  
ULTRA LOW FLUORIDE, ULTRA LIGHTWEIGHT, OUTER SPACE, 600 VOLT

Date 6-7-17

Revision C

This specification sheet forms a part of the latest issue of Raychem Specification 55/.

CONDUCTOR - SILVER-COATED HIGH-STRENGTH  
COPPER ALLOY

INSULATION - ULTRA LOW FLUORIDE,  
RADIATION-CROSSLINKED,  
MODIFIED ETFE

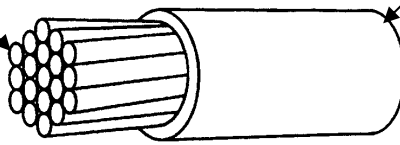


TABLE I. CONSTRUCTION DETAILS

| PART NUMBER<br><sup>1/</sup> | WIRE<br>SIZE<br>(AWG) | CONDUCTOR<br>STRANDING<br>(number x AWG) | DIAMETER OF<br>STRANDED<br>CONDUCTOR<br>(inch) |         | FINISHED WIRE                                       |                    |                                     |
|------------------------------|-----------------------|--|--|---------|---|--------------------|-------------------------------------|
|                              |                       |  | MINIMUM  | MAXIMUM | MAXIMUM<br>RESISTANCE<br>AT 20°C<br>(ohms/1000 ft.) | DIAMETER<br>(inch) | MAXIMUM<br>WEIGHT<br>(lbs/1000 ft.) |
|                              |                       |  |  |         |   |                    |                                     |
| 55/LF0314-30-*               | 30                    | 7 x 38                                   | .0110  | .0120   | 117.4   | .0195 ± .0015      | .52                                 |
| 55/LF0314-28-*               | 28                    | 7 x 36                                   | .0140  | .0150   | 74.4  | .0225 ± .0015      | .76                                 |
| 55/LF0314-26-*               | 26                    | 19 x 38                                  | .0175  | .0191   | 44.8  | .0274 ± .0017      | 1.22                                |
| 55/LF0314-24-*               | 24                    | 19 x 36                                  | .0225  | .0241   | 28.4  | .0322 ± .0017      | 1.79                                |
| 55/LF0314-22-*               | 22                    | 19 x 34                                  | .0285  | .0301   | 17.5  | .0390 ± .0017      | 2.70                                |
| 55/LF0314-20-*               | 20                    | 19 x 32                                  | .0365  | .0385   | 10.7  | .0495 ± .0017      | 4.27                                |

TABLE II. PERFORMANCE DETAILS

| PART NUMBER<br><sup>1/</sup> | CROSSLINKED VERIFICATION - BEND TESTING |                       |
|------------------------------|---|-----------------------|
|                              | MANDREL DIAMETER<br>(inch) (± 3%)       | WEIGHT<br>(lb) (± 3%) |
| 55/LF0314-30-*               | .250                                    | .063                  |
| 55/LF0314-28-*               | .250                                    | .063                  |
| 55/LF0314-26-*               | .375                                    | .063                  |
| 55/LF0314-24-*               | .375                                    | .125                  |
| 55/LF0314-22-*               | .500                                    | .188                  |
| 55/LF0314-20-*               | .500                                    | .250                  |

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. TE Connectivity also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

<sup>1/</sup> COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

Raychem, TE Connectivity, and TE Connectivity (logo) are trademarks.

DIMENSIONS ARE IN INCHES AND, UNLESS OTHERWISE DESIGNATED, ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.



**Raychem Wire & Cable**  
501 Oakside Avenue  
Redwood City, CA 94063-3800  
Phone: 1-800-522-6752  
Fax: 1-650-361-6297



## WIRE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

COLOR: White preferred

CONCENTRICITY: 80% (minimum)

CROSSLINKED VERIFICATION: 300 ± 3°C for 1 hour

FLUORIDE EXTRACTION: 70 ± 2°C for 168 hours, 20 ppm (maximum)

IDENTIFICATION AND COLOR STRIPING DURABILITY:

125 cycles (250 strokes) (minimum), 500 g weight

INSULATION ELONGATION: 50% (minimum)

INSULATION FLAWS:

Spark Test, 1.5 kV (rms) (30-24 AWG)

3.0 kV (rms) (22-20 AWG)

Impulse Dielectric Test, 6.0 kV (peak)

INSULATION THICKNESS: .004 in. (nominal)

RADIATION RESISTANCE: 500 megarads

SHRINKAGE: 230 ± 3°C for 1 hour, 0.125 in. (maximum) in 12 inches

VACUUM STABILITY:

Total Mass Loss (TML), 1.00% (maximum)

Volatile Condensable Material (VCM): 0.10% (maximum)

VOLTAGE WITHSTAND (Post Environmental): 1500 volts (rms), 60 Hz, 5 minutes

1/ PART NUMBER:

The "\*" in the part numbers in Tables I and II shall be replaced by a color code designator.

Example: AWG 22, white: 55/LF0314-22-9

AWG 22, white with a black stripe: 55/LF0314-22-90

1/ See footer section on page 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)