



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
AD	00	C		REVISED PER ECO-14-006554	09MAY2014	NK	MM

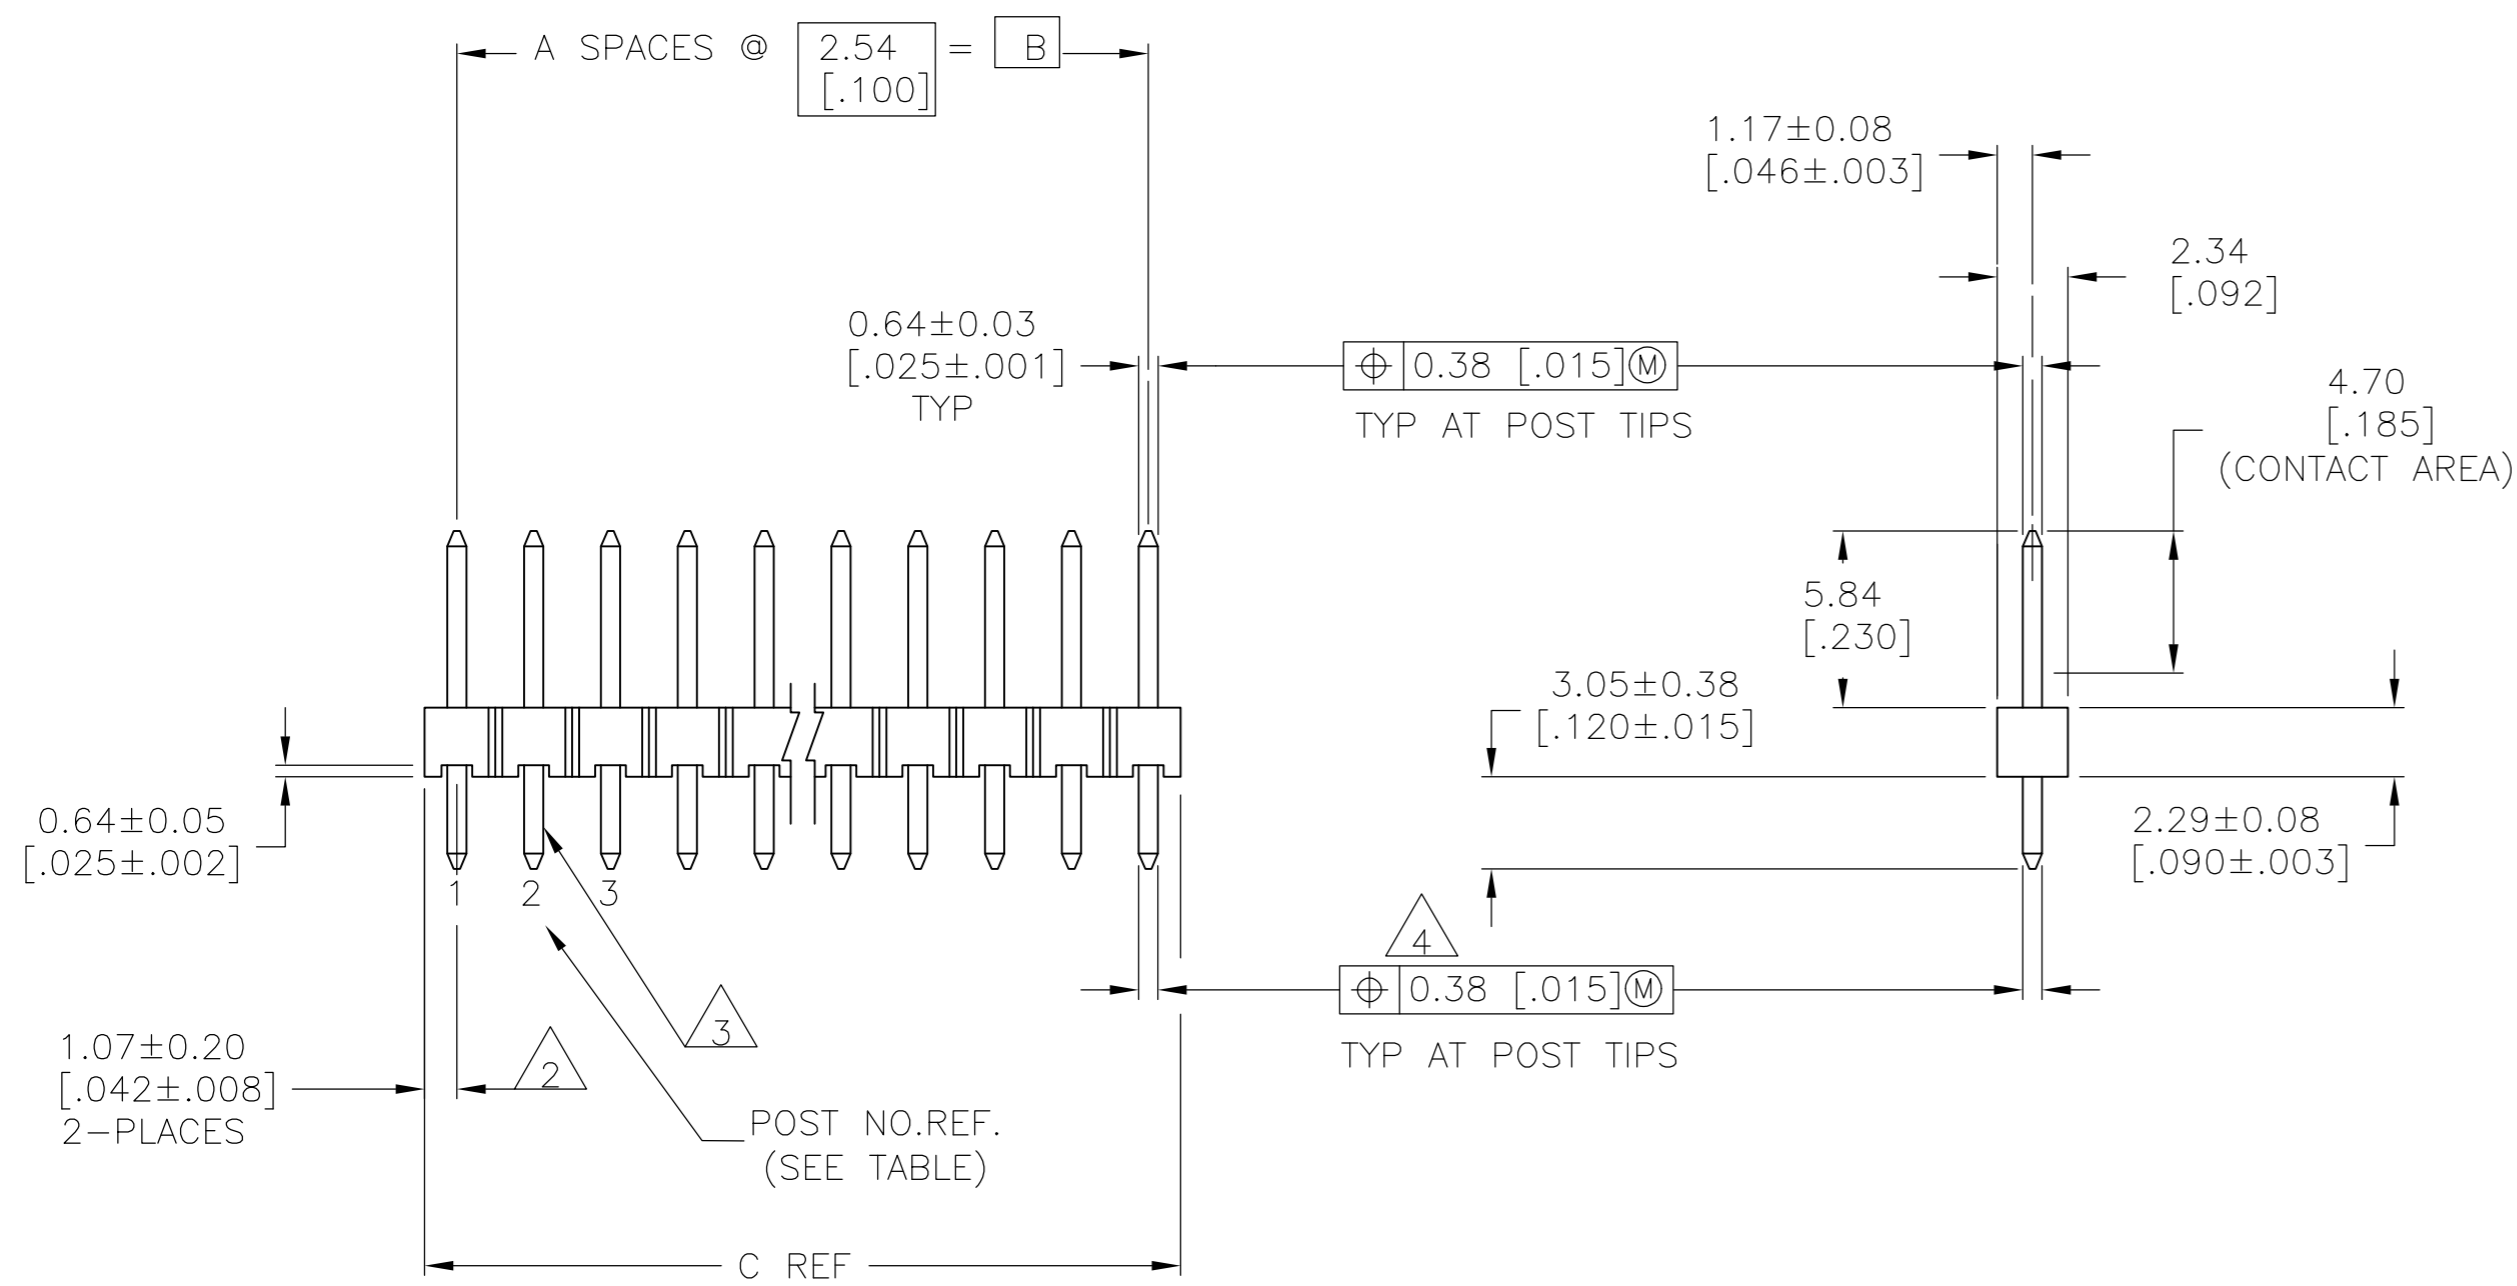

- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 2 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- 3 RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- 4 $\varnothing 0.50 [.020] M$ FOR KINKED TAILS.
- 5 HOUSING: LCP, COLOR-BLACK. POSTS: PHOSPHOR BRONZE.
- 6 0.000076 [.0000030] MIN GOLD OVER 0.00068 [.000027] Pd/Ni IN CONTACT AREA, 0.00254-0.00504 [.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.

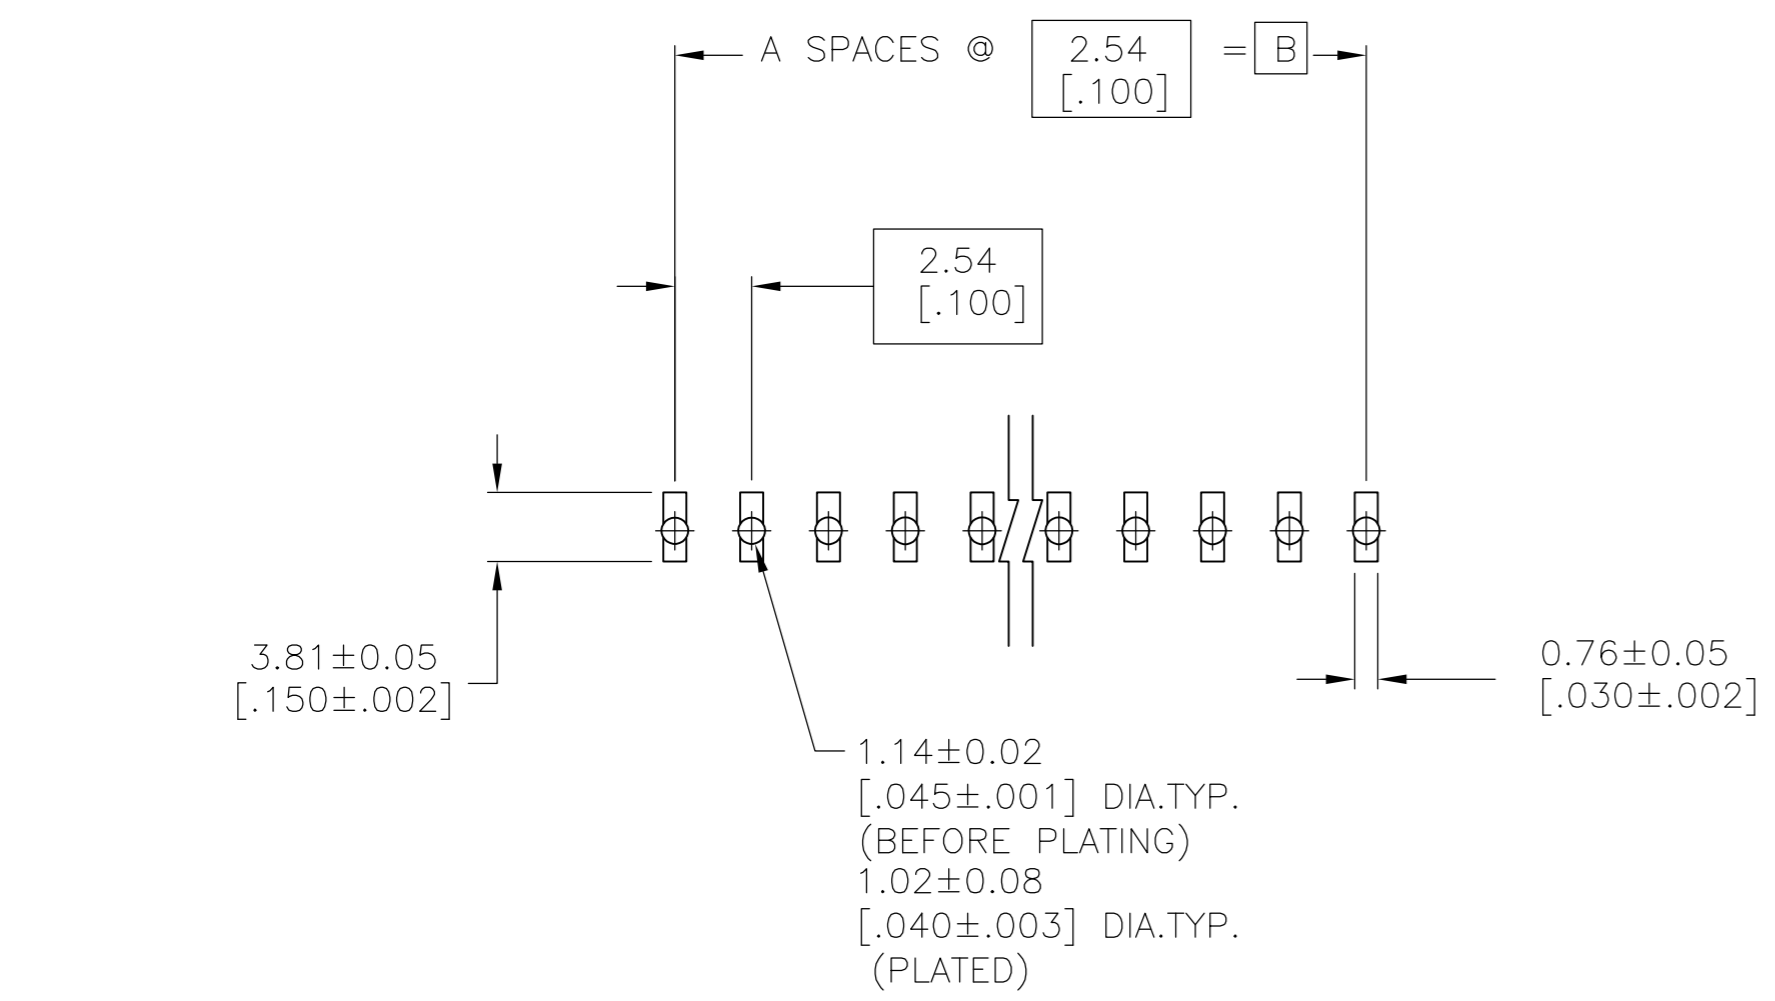

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR 1.60 [.063] THICK PC BOARD AND 0.305 [.0120] STENCIL THICK.

6	101.19 [3.984]	99.06 [3.900]	39	40	4-1977955-0
6	2.13 [.084]	-	0	1	1977955-1
PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	02SEP2013	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK	KIRAN HOLAL	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	MIKE MILLER	HEADER ASSEMBLY, MOD II, BREAKAWAY, SINGLE ROW, HIGH TEMPERATURE, VERTICAL WITH RETENTION FEATURE W/.025 SQ. POSTS, .100 C/L,30 Pd/Ni	
0 PLC ± -		PRODUCT SPEC	MIKE MILLER	SIZE	CAGE CODE
1 PLC ± -		APPLICATION SPEC	MIKE MILLER	A2	00779
2 PLC ± -		WEIGHT	MIKE MILLER	DRAWING NO	RESTRICTED TO
3 PLC ± -		FINISH	MIKE MILLER	C=1977955	-
4 PLC ± -		SEE TABLE	MIKE MILLER	SCALE	SHEET
ANGLES ± -			MIKE MILLER	4:1	1 of 1
FINISH			MIKE MILLER	REV	C
MATERIAL			MIKE MILLER	CUSTOMER DRAWING	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)