


DO NOT SCALE

DIMENSIONS IN mm




METRIC

THIRD ANGLE  
PROJECTION



P.C.B. HOLE DIM. ACTION PIN

DRILLED HOLE	:1,60 ±0,025	mm
FIN. HOLE	:1,39 to 1,54	mm
AFTER REFLOW	:1,37 to 1,54	mm
Cu-thks	:0,025 to 0,075	mm
SnPb-thks	:0,004 to 0,010	mm

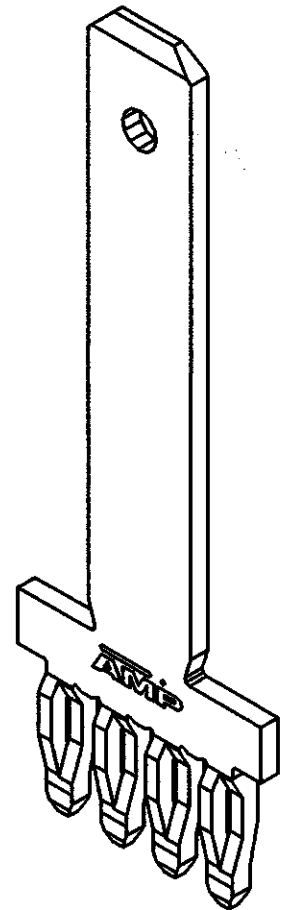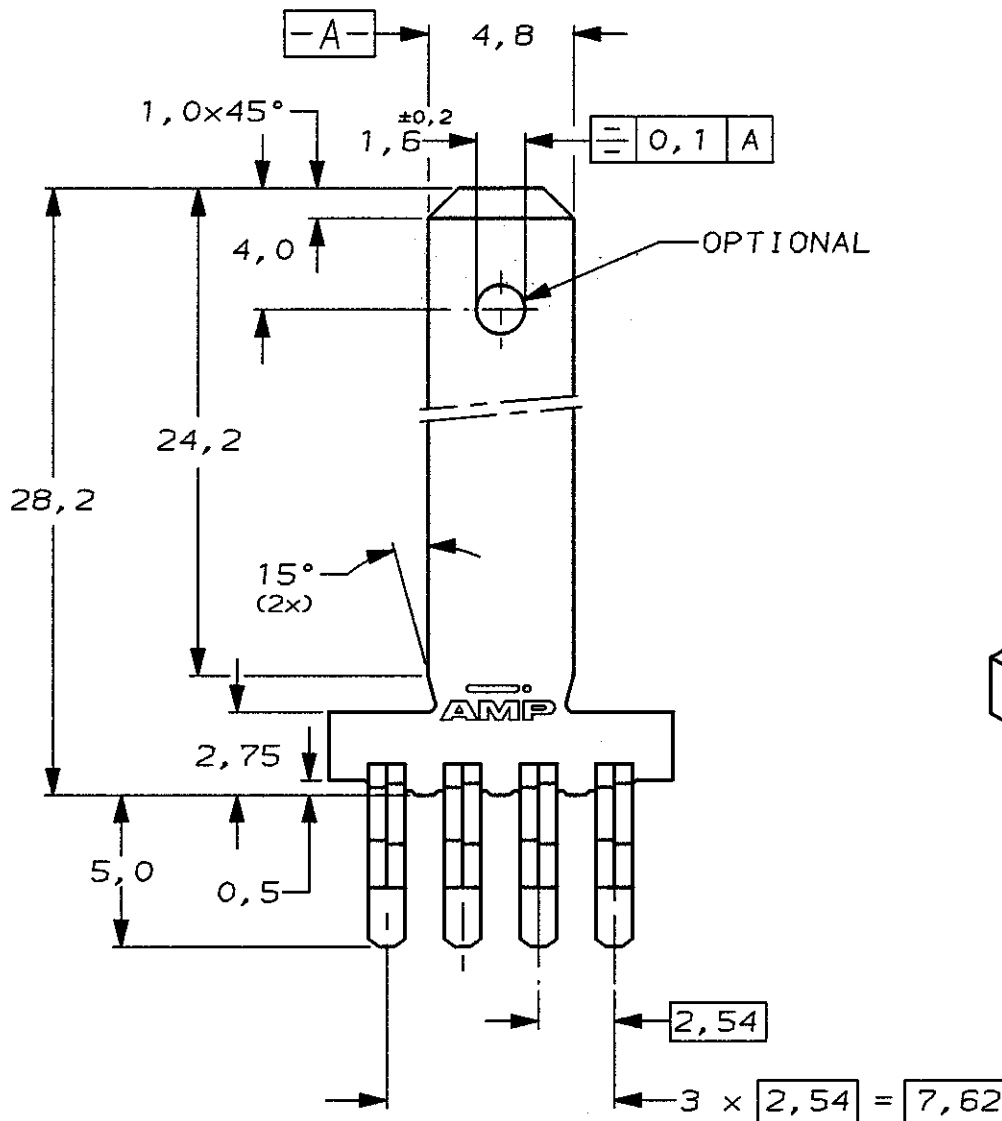

2,54µm MIN. SnPb (93/7) ALL OVER.	PHOSPHORBRONZE	338098-1
--------------------------------------	----------------	----------

FINISH	MATERIAL	PARTNUMBER
--------	----------	------------

CUSTOMER DRAWING		FOR REFERENCE ONLY WILL NOT BE UPDATED
© COPYRIGHT 19- BY AMP HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING. THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION		
<b>AMP</b>		AMP HOLLAND B.V. 's-Hertogenbosch, The Netherlands.

0	EH-0600-96	J.G.	RvL	23-05-96	NAME	4,8mm SERIES TAB WITH ACTION-PIN, FOR POSITIVE LOCK RECEPTACLE. (1,6-3,2 P.C. BOARD THICKNESS.)
LTR.	REVISION RECORD	DR.	CHK.	DATE		

DR.:	J. Gibbels	CHK.:	R. V. Lakven	APP.:	R. Smoets	DWG. No.		REV. LTR.	0	SHEET	1 OF 1	A4
DATE:	23-05-96	DATE:		DATE:		Downloaded From	Oneyac.com					

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)